

# Planning booklet

PURSA

# Contents

Information . . . . . 3

Worktop . . . . . 5-46

direction of the ducting to the back . . . . . 6

direction of the ducting to the right. . . . . 36

direction of the ducting to the left . . . . . 42

Plinth . . . . . 47-94

direction of the ducting to the right. . . . . 48

direction of the ducting to the left . . . . . 72

Floor . . . . . 95-190

direction of the ducting to the back. . . . . 96

direction of the ducting to the right . . . . . 120

direction of the ducting to the front . . . . . 144

direction of the ducting to the left . . . . . 168

Cellar . . . . . 191-239

direction of the ducting to the back . . . . . 192

direction of the ducting to the right . . . . . 204

direction of the ducting to the front . . . . . 216

direction of the ducting to the left . . . . . 228

# Information

To make it easier for you to work with standard planning situations, which we have illustrated in our so-called sample plans, we have created two planning booklets for each product series.

For each product family, there is one planning booklet for exhaust air solutions and one for recirculation air solutions.

With the one-off download of 10 planning booklets, you have access to the complete range of our more than 500 sample plans. By simply linking to the table of contents and using the inserted bookmarks, you can find the planning you need easily, quickly and effectively.

We will be happy to check your installation situation and parts list. Simply send us the floor plan of your kitchen design and the following information by e-mail to [planung@bora.com](mailto:planung@bora.com):

Which BORA system is being planned?

Should the system be operated with exhaust air or recirculated air?

Necessary information for...

- ... Exhaust air:      Desired position of the wall box on the outer wall?  
                            Level of the duct routing (plinth area, floor structure, or on the basement ceiling)?  
                            If applicable, route of the exhaust air duct, if direct route not possible.
- ... Recirculation:    ULBF or ULB3X air purification box

You can reach us for further questions by telephone at  
+49 (0) 80 35 98 40 - 140.

# Naming Sample Plans

„speaking numbering system”

Quantity exhaust modules	System	Version	Level	Offset	Direction	End of Ducting	Special
-	PKA3 Professional 3.0	A – exhaust	0 – without	0 – without	0 – without	0 – without	0 – without
2	PKAS3 Professional 3.0 compact	U – recirculation	1 – worktop	1 – EFRV	1 – back	1 – UEBF	1 – hanging
	CKA2 Classic 2.0		2 – plinth	2 – EFRG	2 – right	2 – UEBR	2 – standing
	P X Pure/M Pure/ Pure		3 – floor construction		3 – front	3 – swanneck UEBF	3 – blind corner
	SP S Pure		4 – cellar		4 – left	4 – swanneck UEBR	4 – upright
	B Basic					5 – ULBF	
						6 – ULB3X	
						7 – PULBTA	

Example:

SP A 2 0 4 4 0


Cooktop extractor S Pure exhaust version, plinth, ducting to the left with swanneck and UEBR



# Worktop

flat wall sleeve. . . . .	6
round wall sleeve. . . . .	24
direction of ducting to the right . . . . .	36
direction of the ducting to the left . . . . .	42

Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
	Item BORA Ecotube	
2	EFV	duct connection flat
1	UEBF	3box wall sleeve
1	UEBFES	3box wall sleeve vent guard
1	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

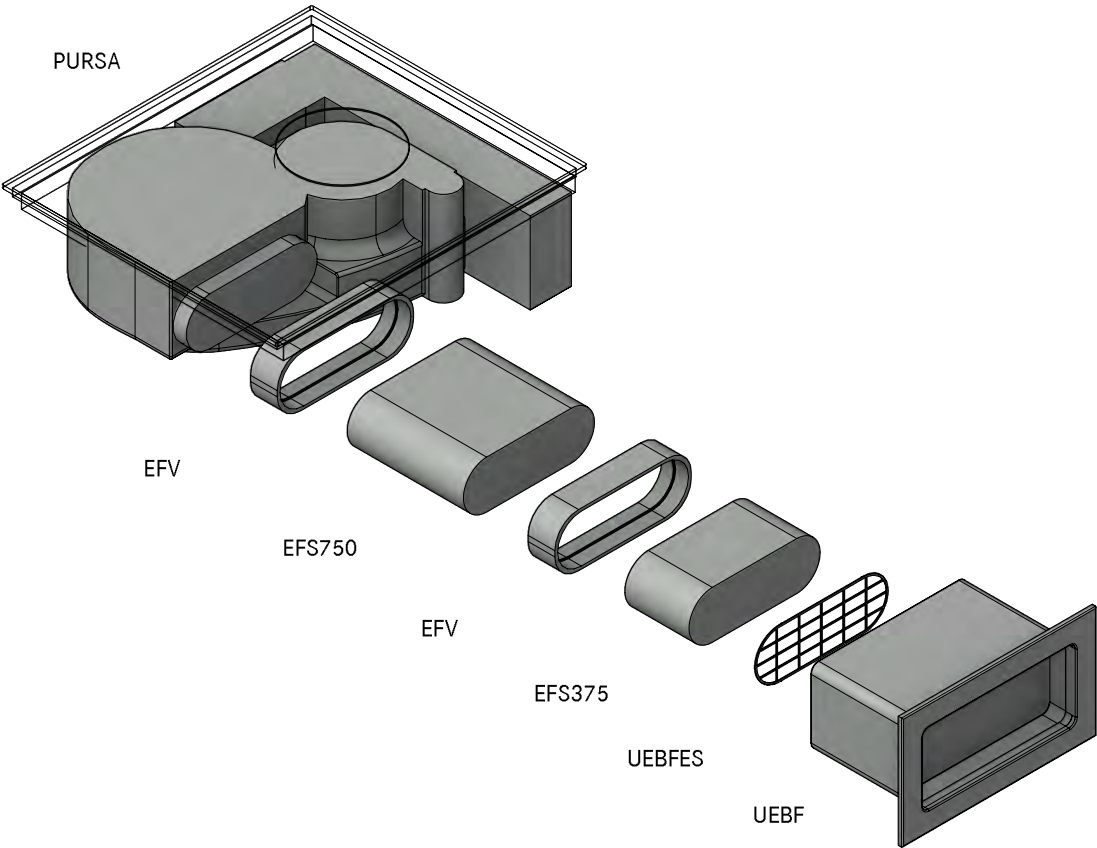


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

SPA10110  
SPure Worktop back UEBF  
GR

Version, 1.0



- ①. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- ②. UEBFES/ UEBRES grill must be installed if the ducting has no bends and the ducting route is  $\leq 900$  mm
- ③. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract

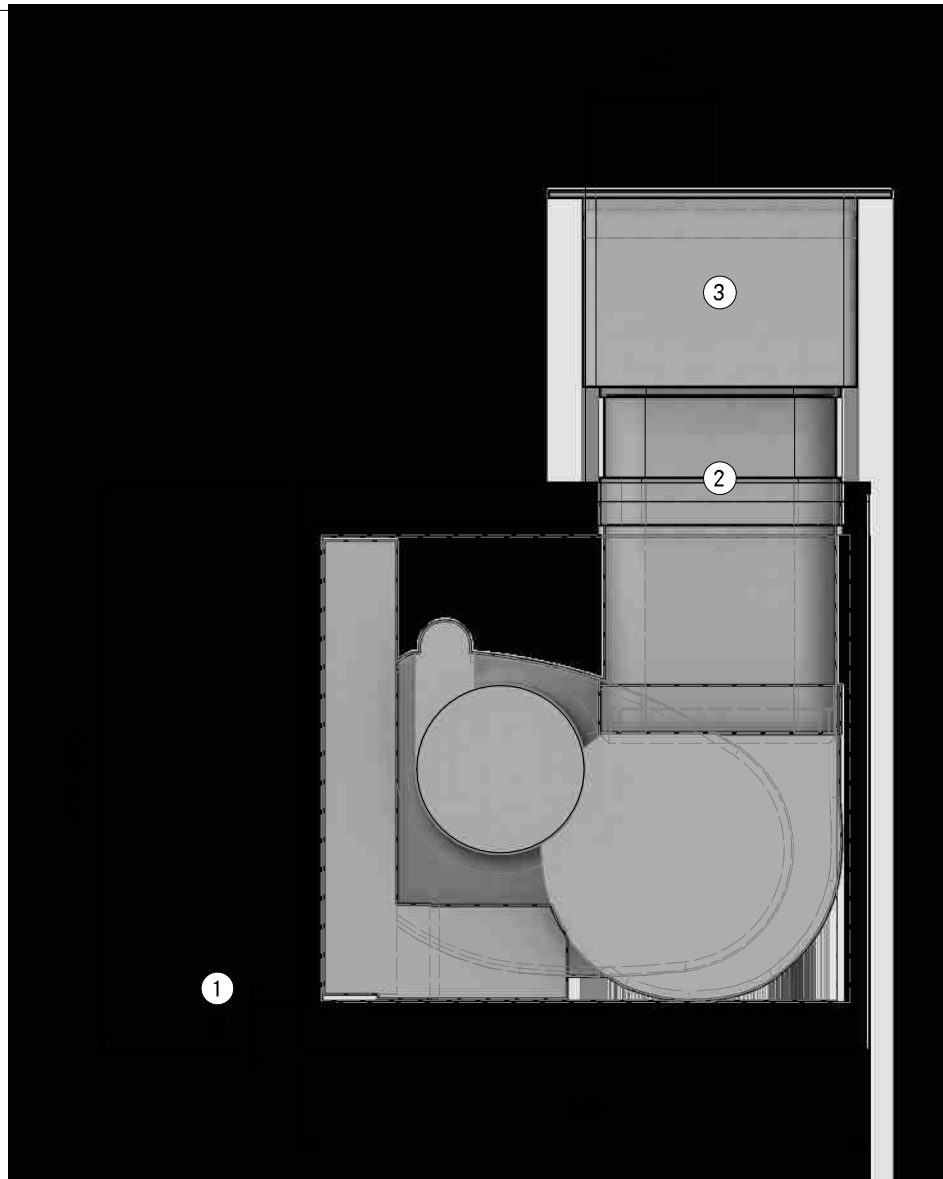


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA10110**  
**SPure Worktop back UEBF**

LAYOUT

**SA**

Version, 1.0

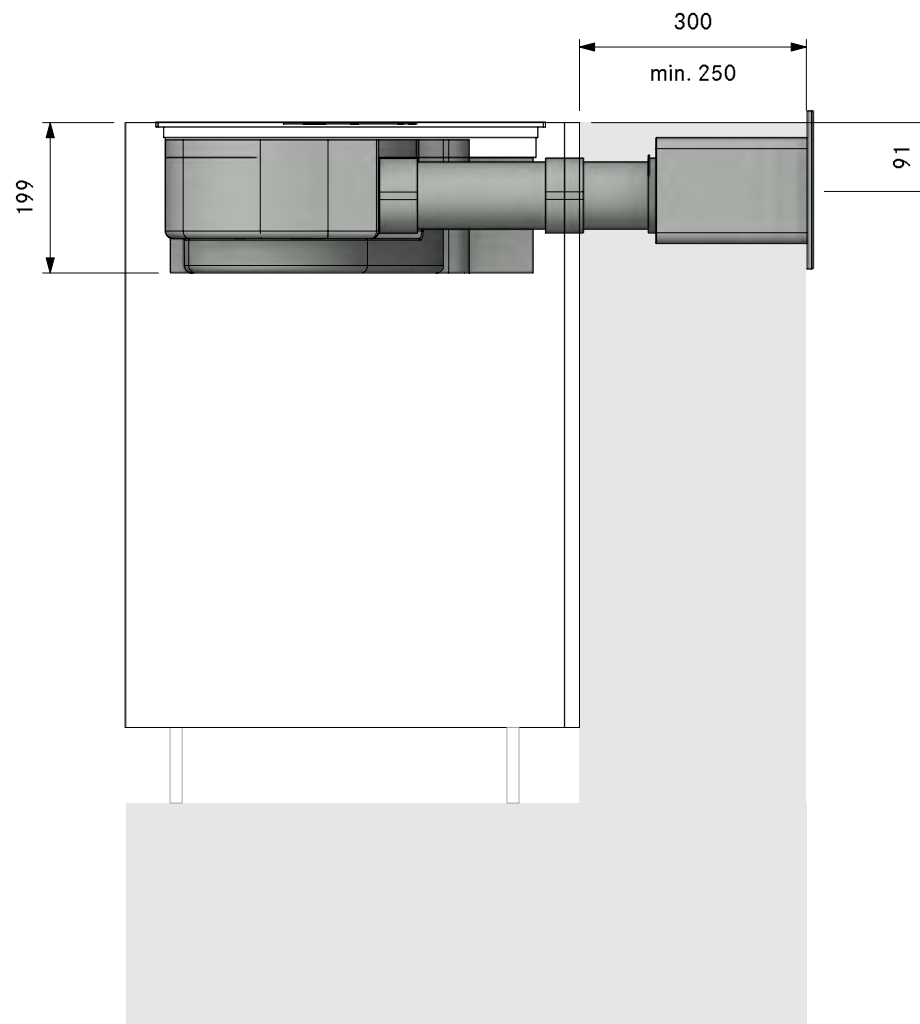

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


**SPA10110**  
**SPure Worktop back UEBF**

Version, 1.0



LAYOUT

FA

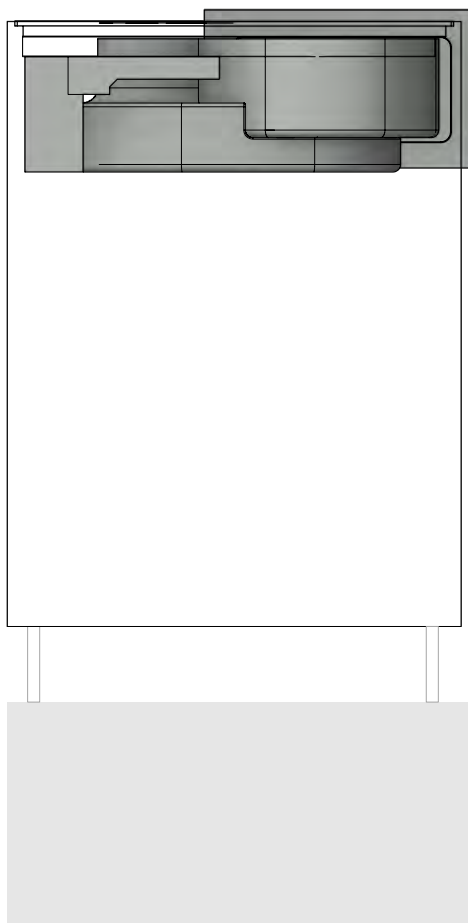


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA10110  
SPure Worktop back UEBF

LAYOUT


Detail

Version, 1.0

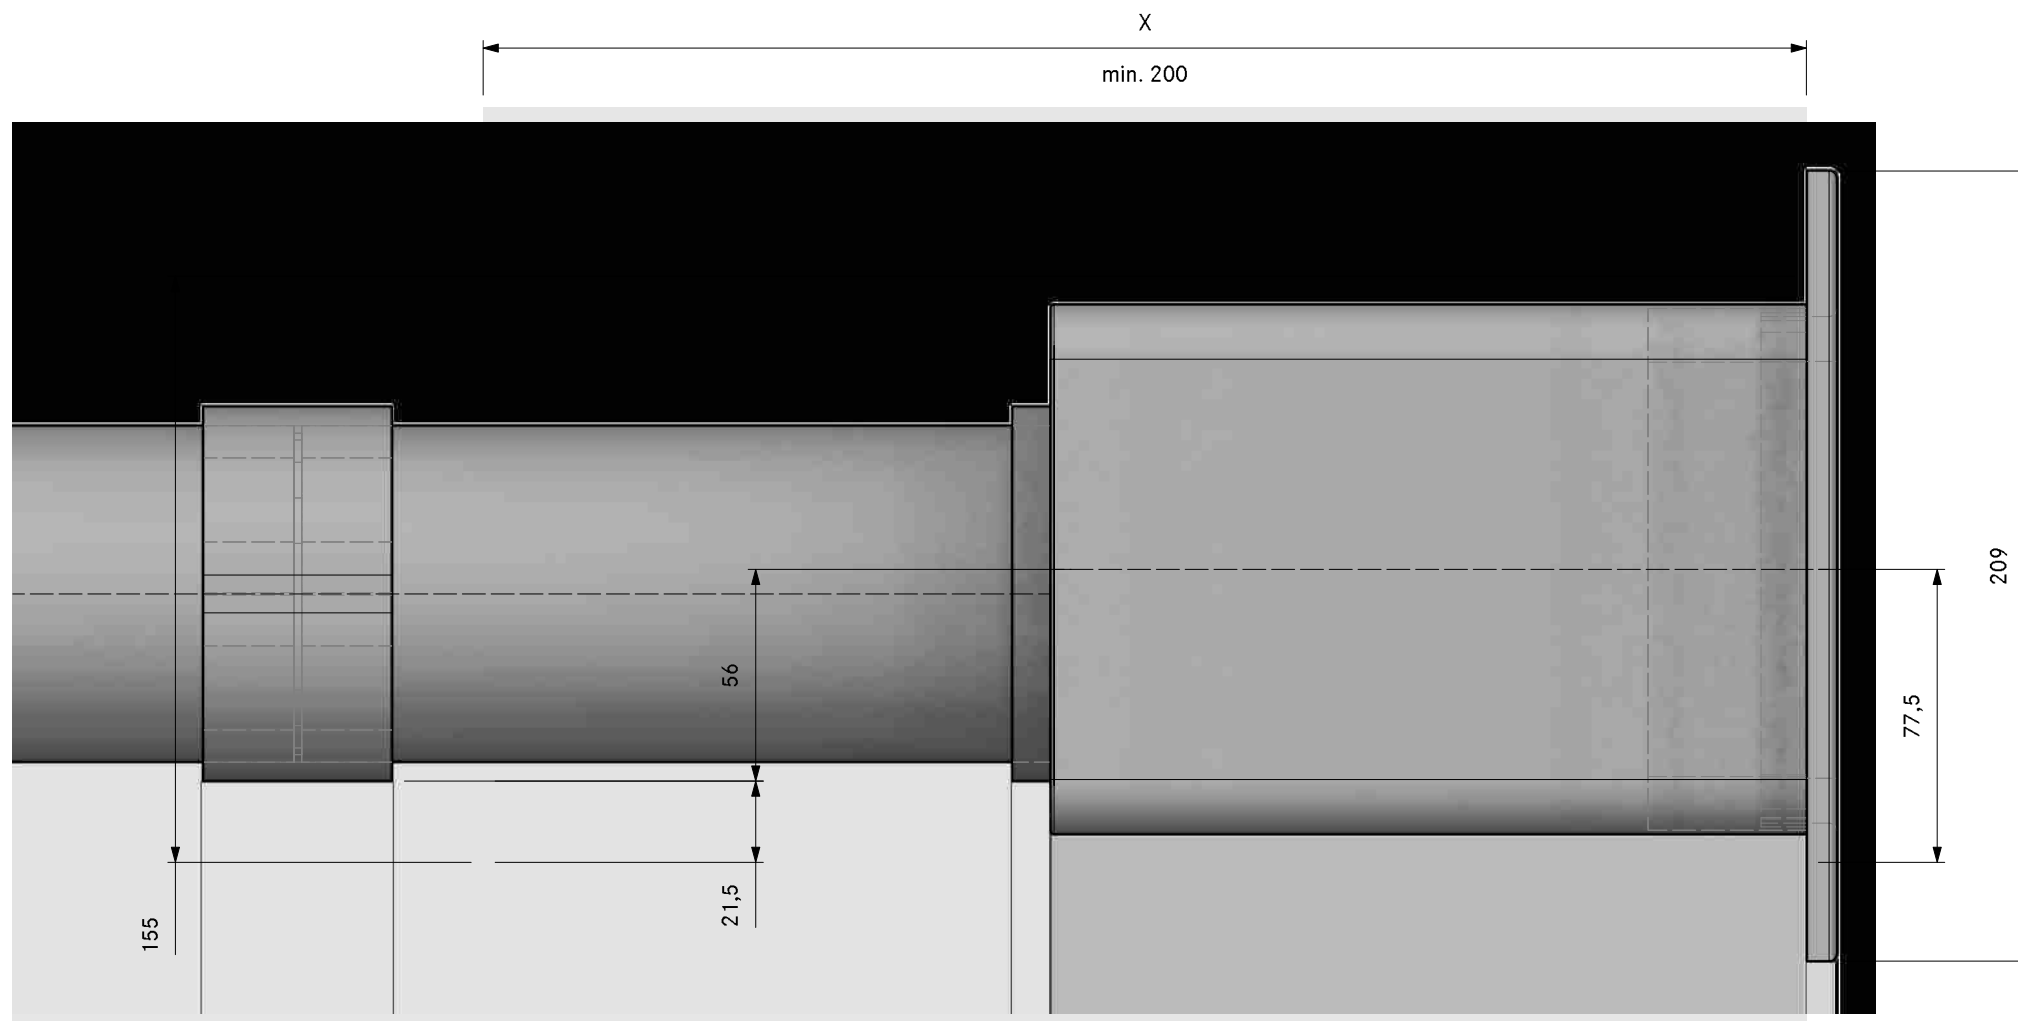



Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
1	EFAF	flat adaptor flexible
1	EFV	duct connection flat
1	UEBF	3box wall sleeve
1	UEBFES	3box wall sleeve vent guard
1	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

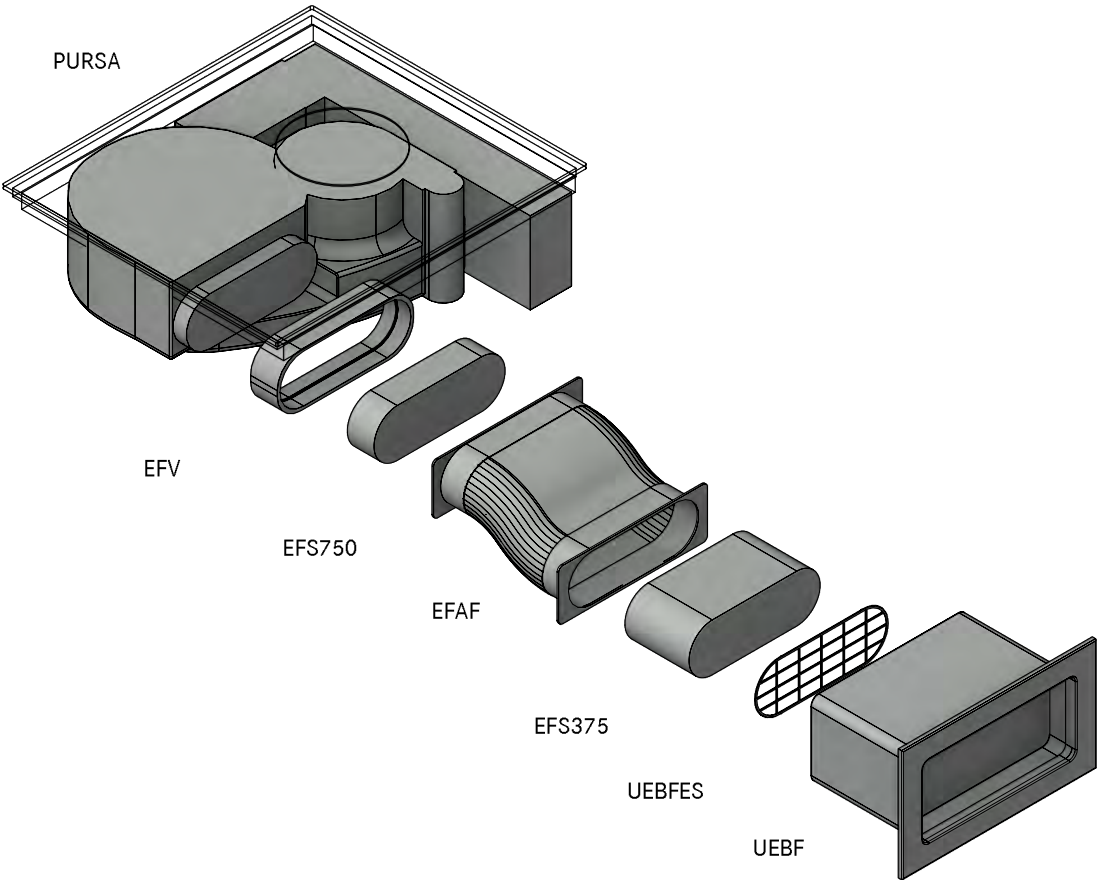




MODELPLAN	
REFERENCE NUMBER	SPA10115
COMPOSITION	SPure Worktop back UEBF
LAYOUT	GR

Version, 1.0



- ①. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- ②. Maximum offset EFAF: height 50mm, side 30mm
- ③. UEBFES/ UEBRES grill must be installed if the ducting has no bends and the ducting route is ≤900 mm
- ④. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract

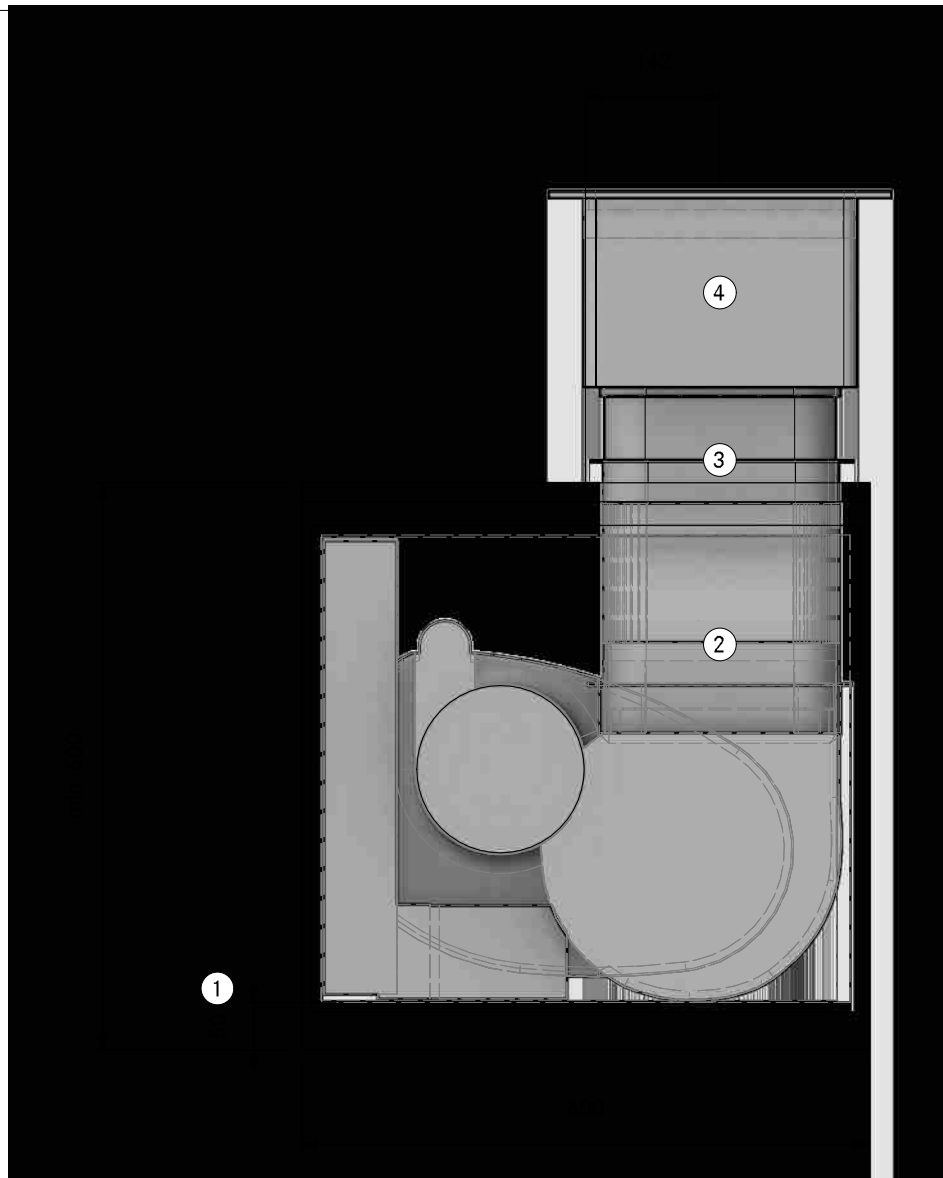


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA10115**  
**SPure Worktop back UEBF**

LAYOUT

**SA**

Version, 1.0

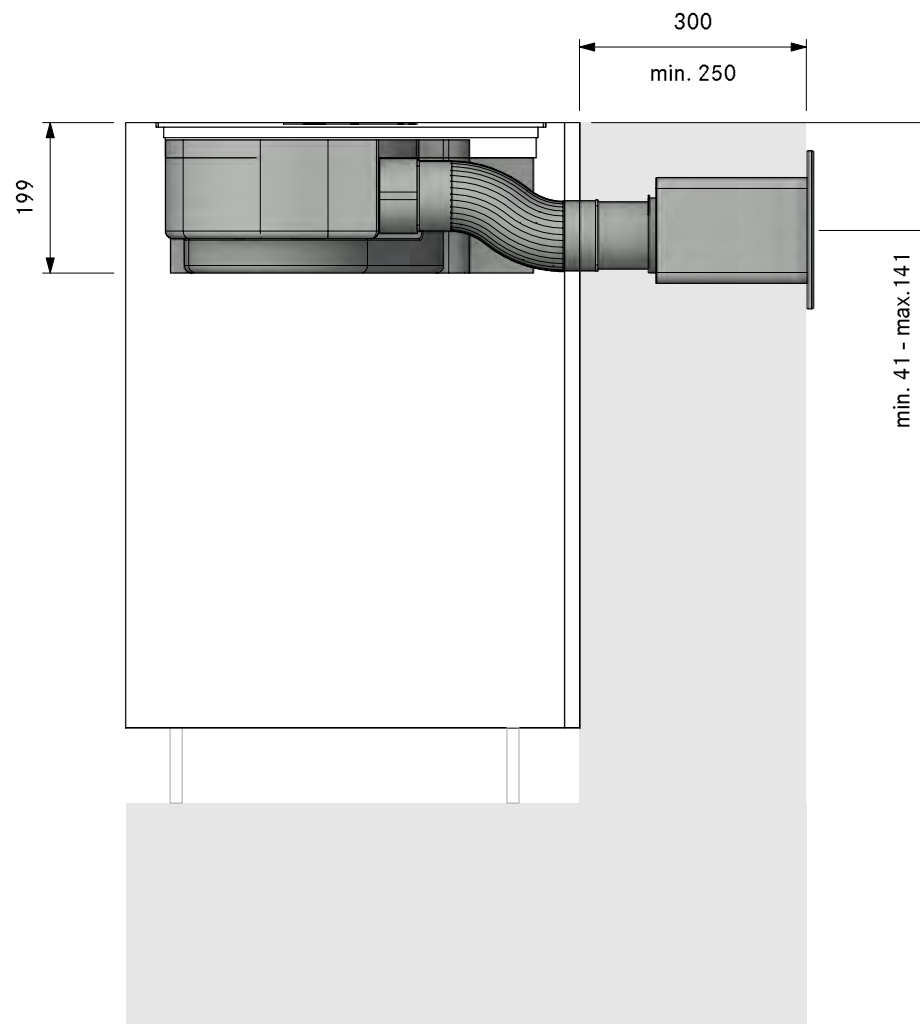

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


**SPA10115**  
**SPure Worktop back UEBF**

Version, 1.0



LAYOUT

FA

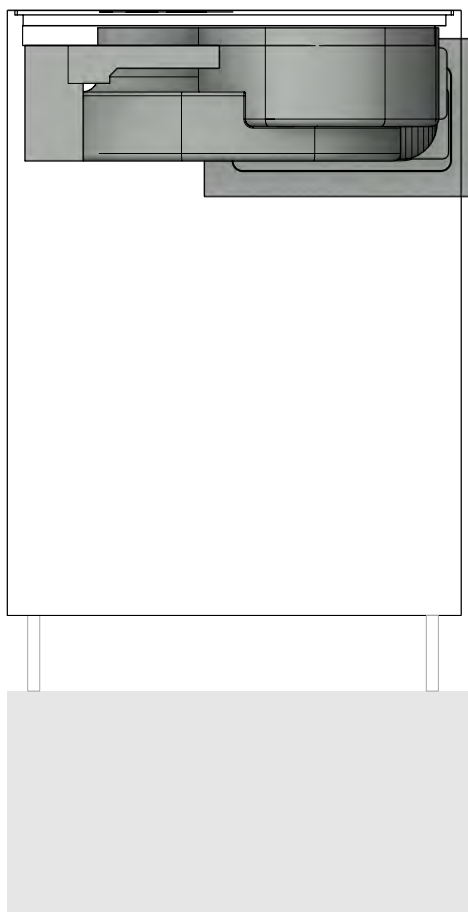


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA10115  
SPure Worktop back UEBF

LAYOUT

Detail

Version, 1.0

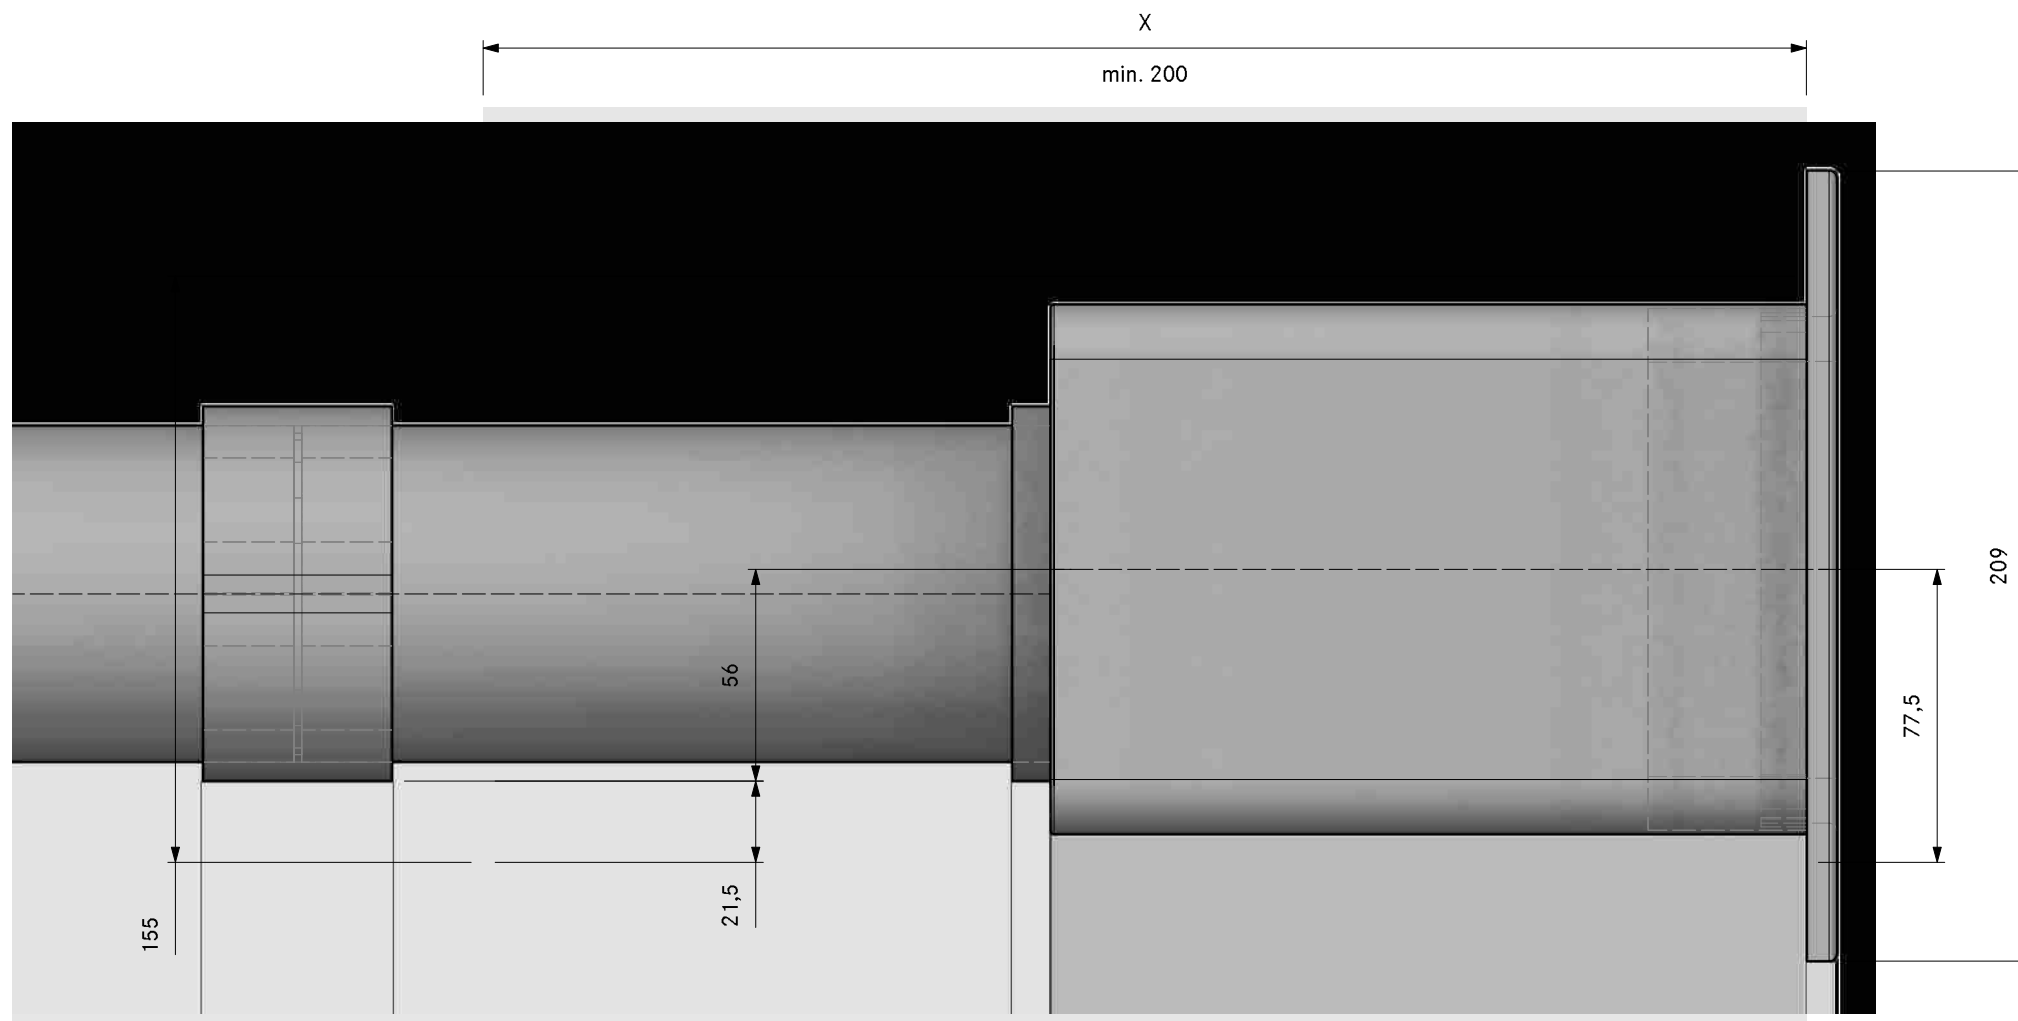





MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA10130  
SPure Worktop back swan neck UEBF

LAYOUT  
3D

Version, 1.0

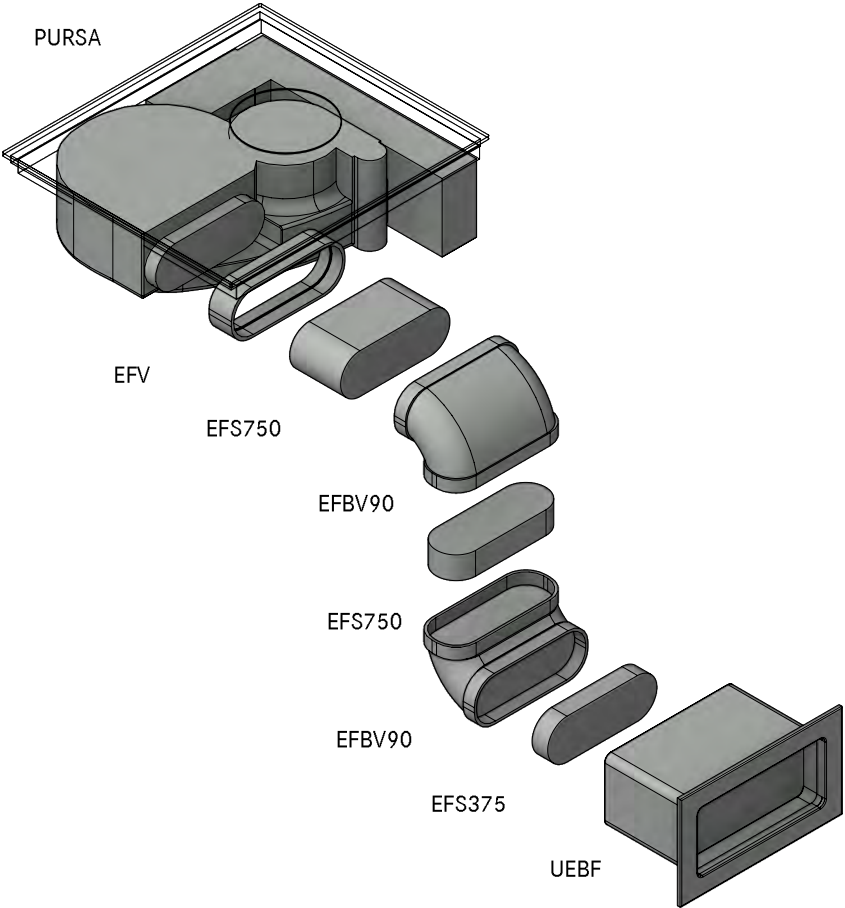

Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
2	EFBV90	90° bend flat vertical
1	EFV	duct connection flat
1	UEBF	3box wall sleeve
1	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA10130  
SPure Worktop back swan neck UEBF

LAYOUT

GR

Version, 1.0

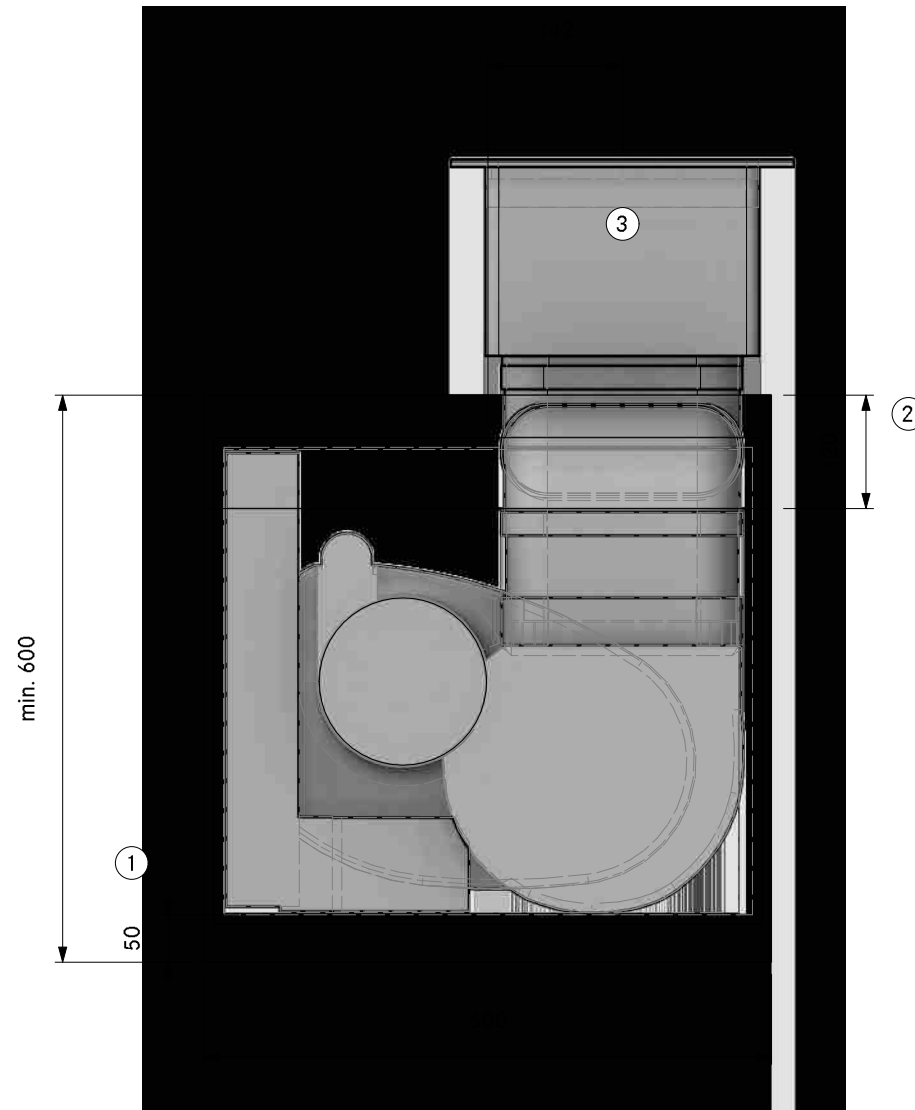

- ①. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- ②. Min. space required
- ③. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA10130  
SPure Worktop back swan neck UEBF

LAYOUT

SA

Version, 1.0

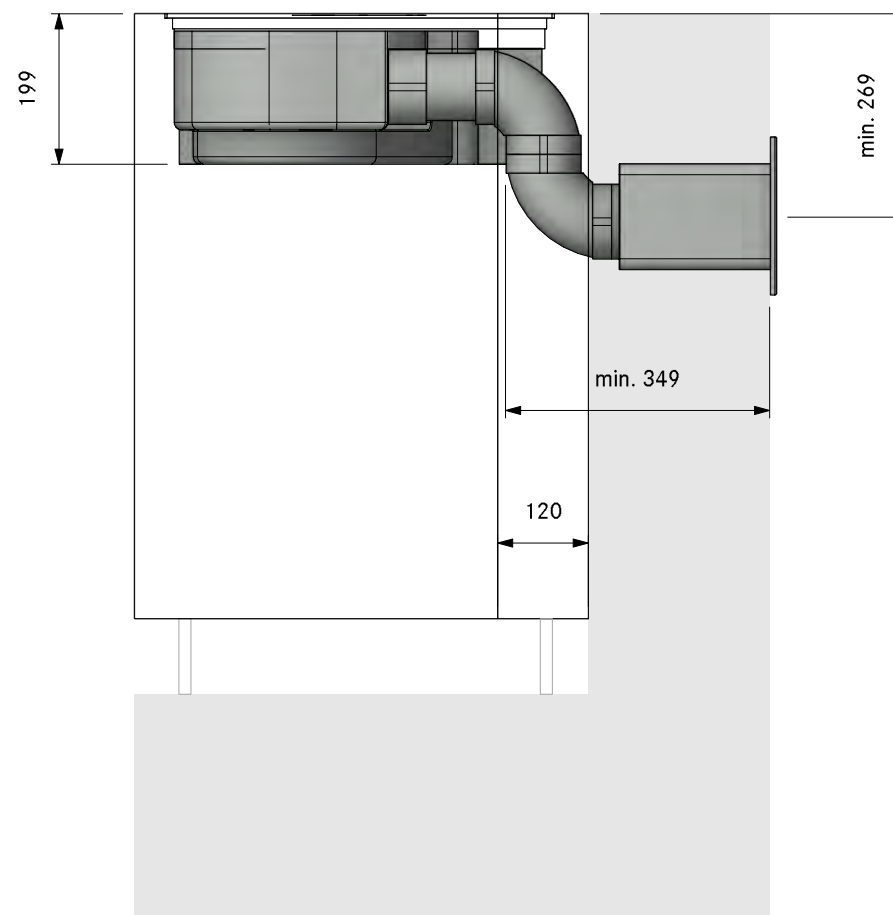



MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


**SPA10130**  
**SPure Worktop back swan neck UEBF**

Version, 1.0



LAYOUT

FA

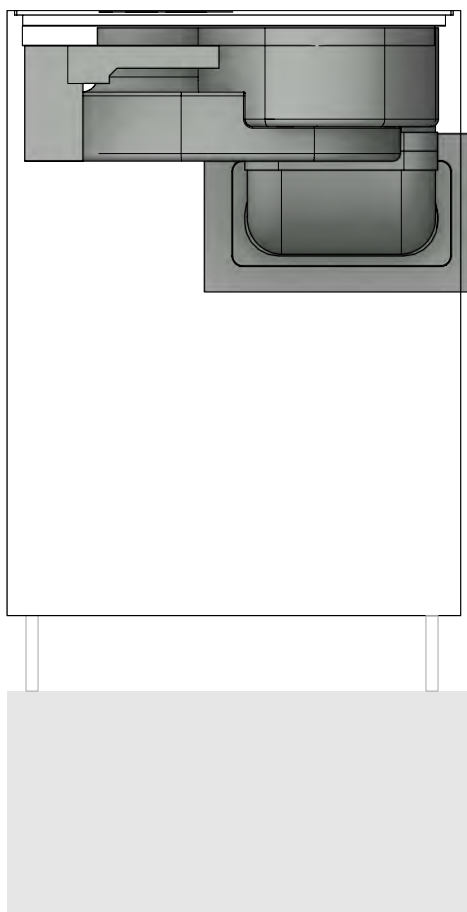


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA10130  
SPure Worktop back swan neck UEBF

LAYOUT


Detail

Version, 1.0

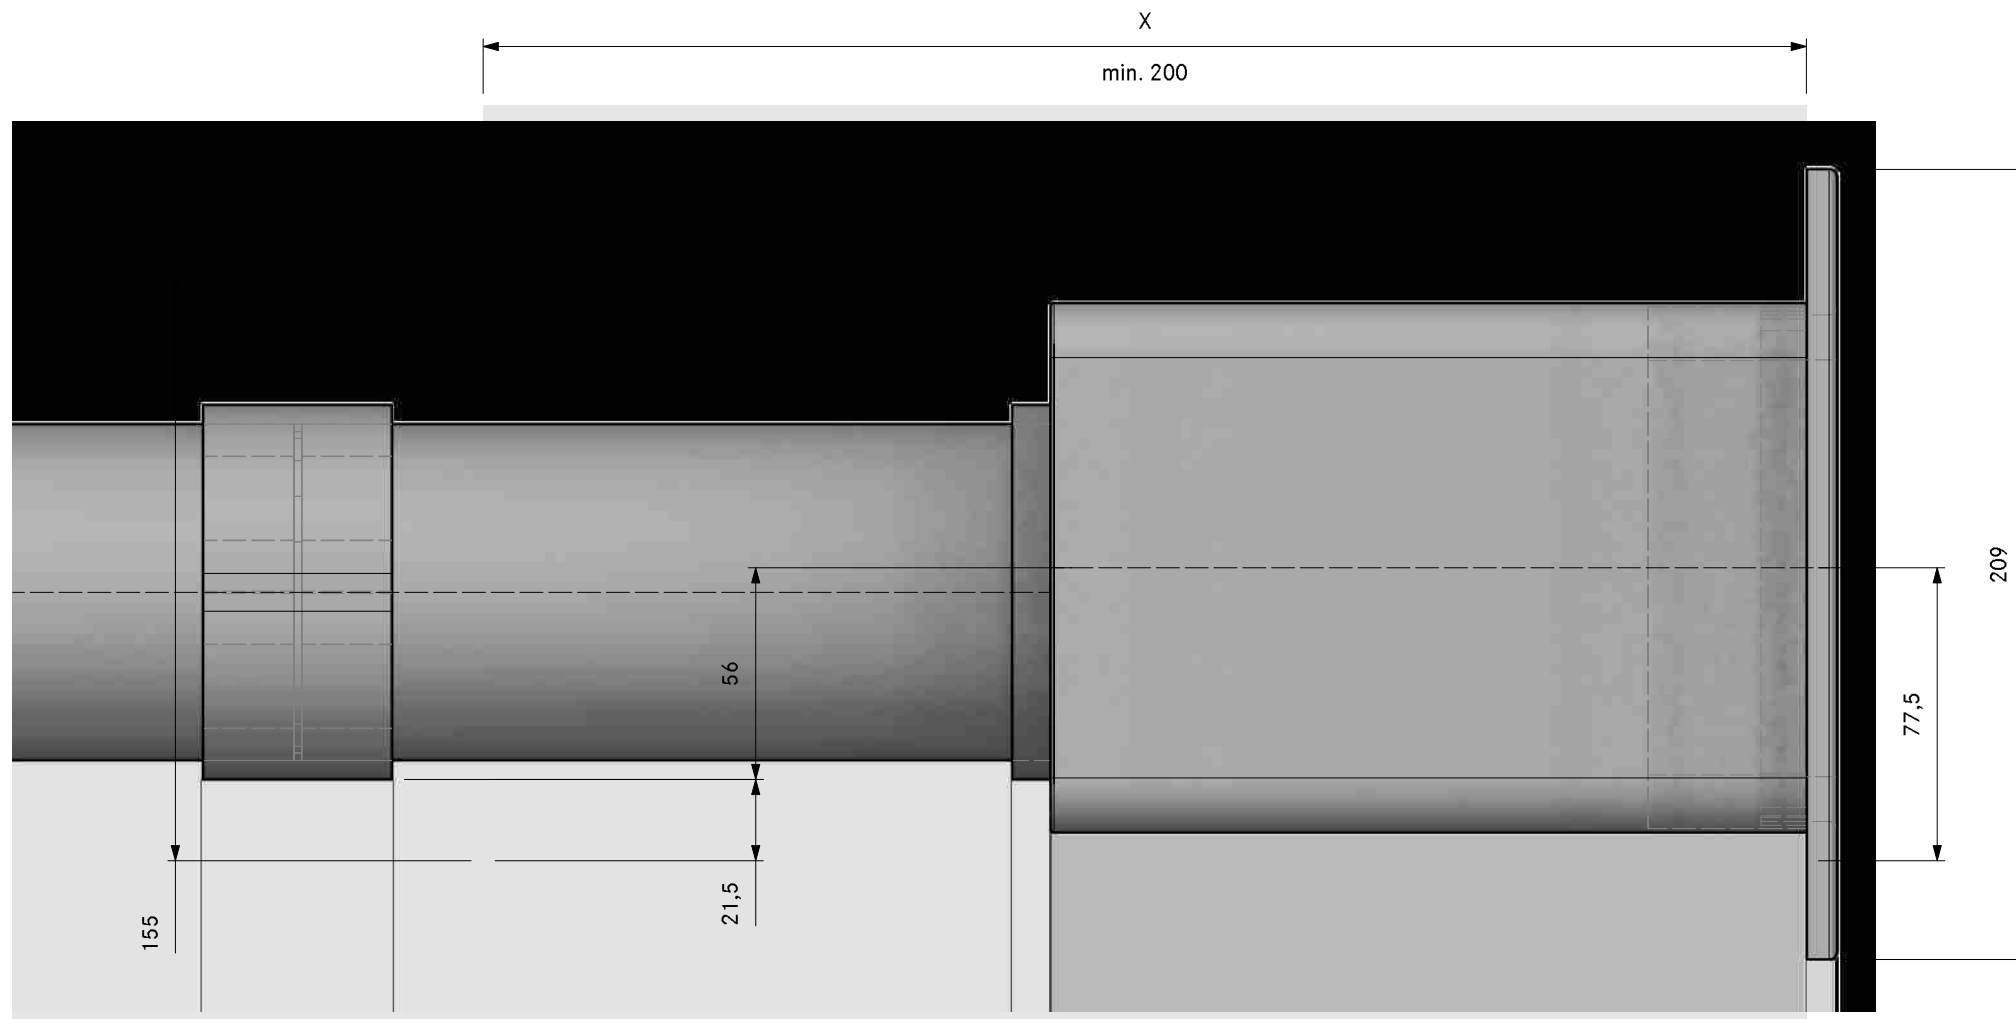



Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
1	EFRG	bridge flat round straight
1	EFV	duct connection flat
1	UEBR	3box wall sleeve round
1	UEBRES	3box wall sleeve round vent guard
1	ER750	round duct 750mm
1	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

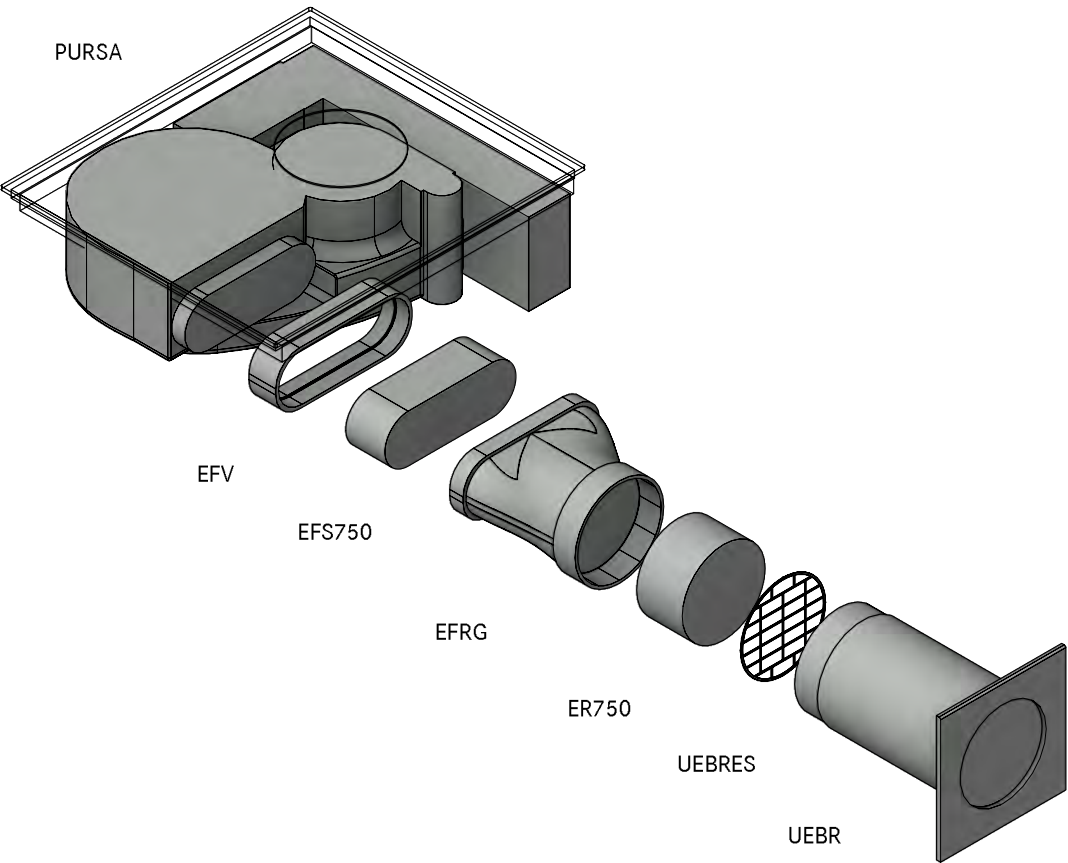


MODELPLAN	
REFERENCE NUMBER	SPA10120
COMPOSITION	SPure Worktop back UEBR
LAYOUT	GR

Version, 1.0



- ①. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- ②. Min. space required
- ③. UEBFES/ UEBRES grill must be installed if the ducting has no bends and the ducting route is  $\leq 900$  mm
- ④. Hole size min.  $\varnothing 180$ mm. Wall vent must be able to fully open for air to extract

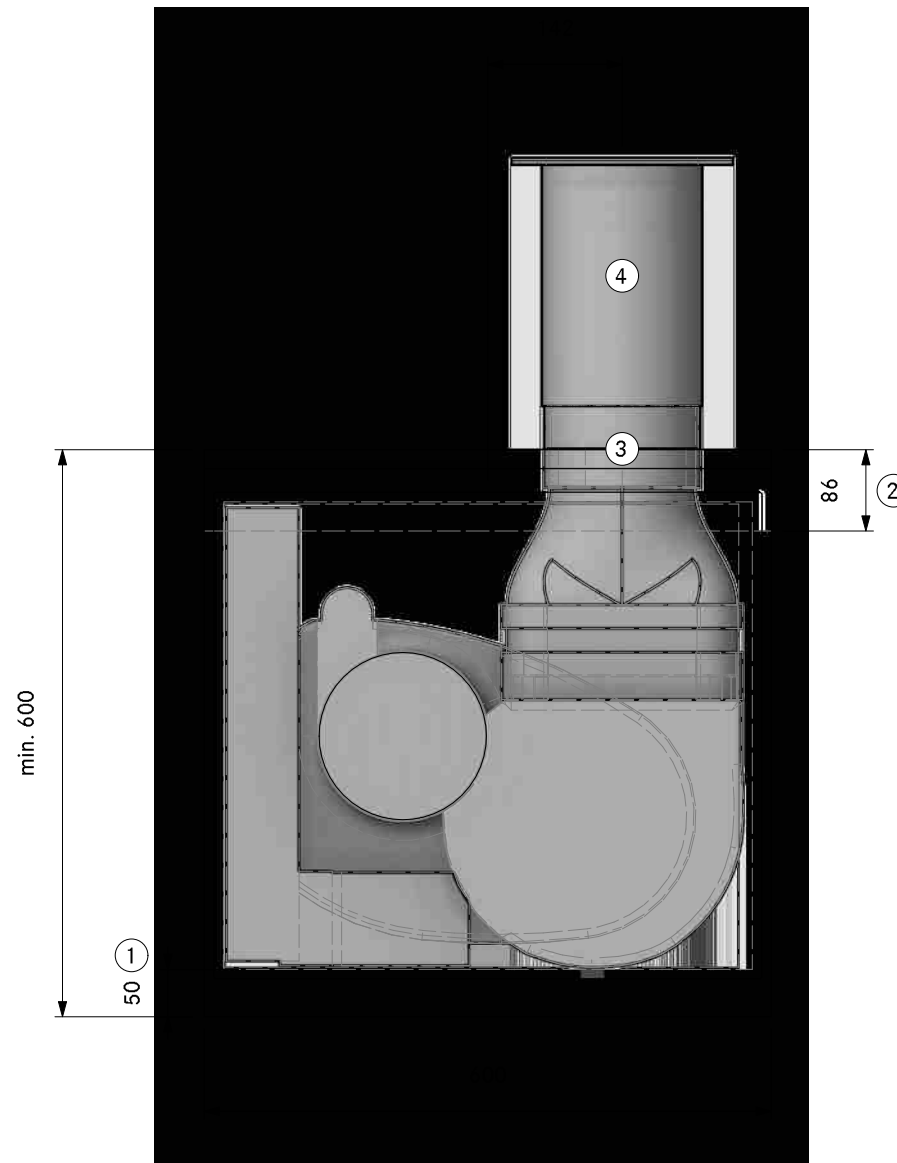


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA10120**  
**SPure Worktop back UEBR**

LAYOUT

**SA**

Version, 1.0

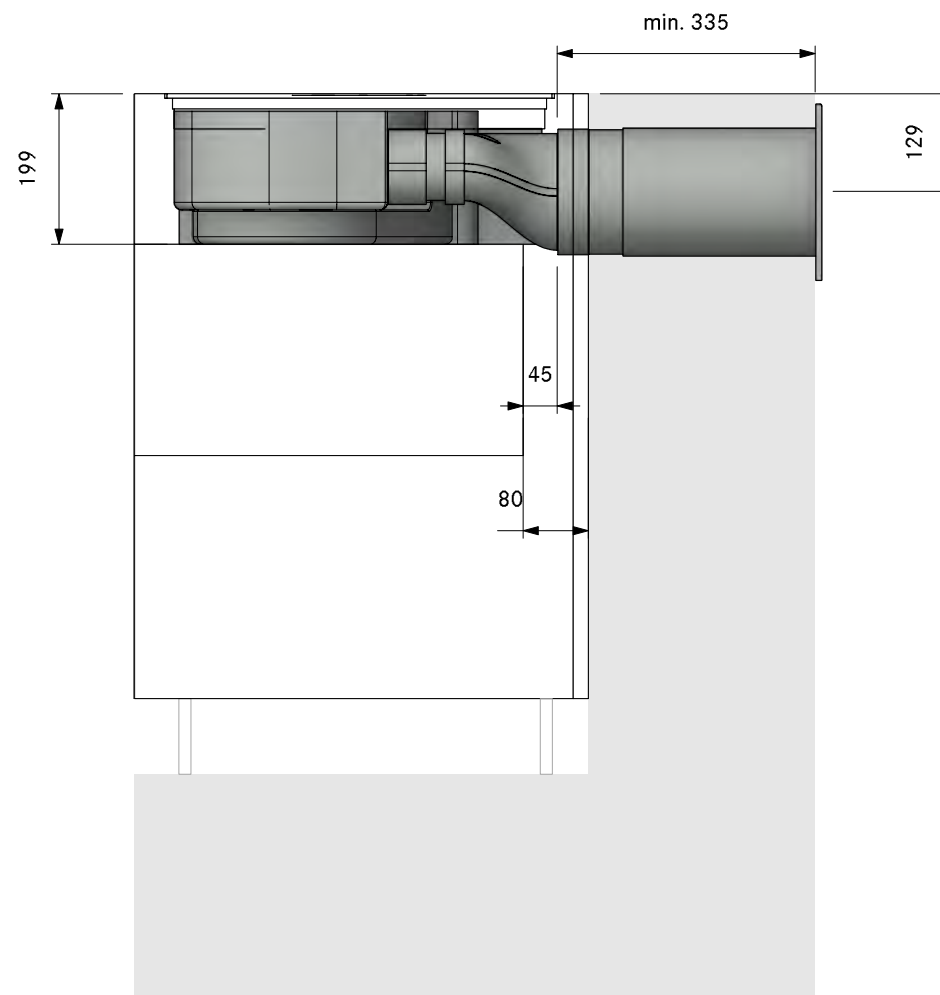


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA10120**  
**SPure Worktop back UEBR**

LAYOUT

**FA**

Version, 1.0

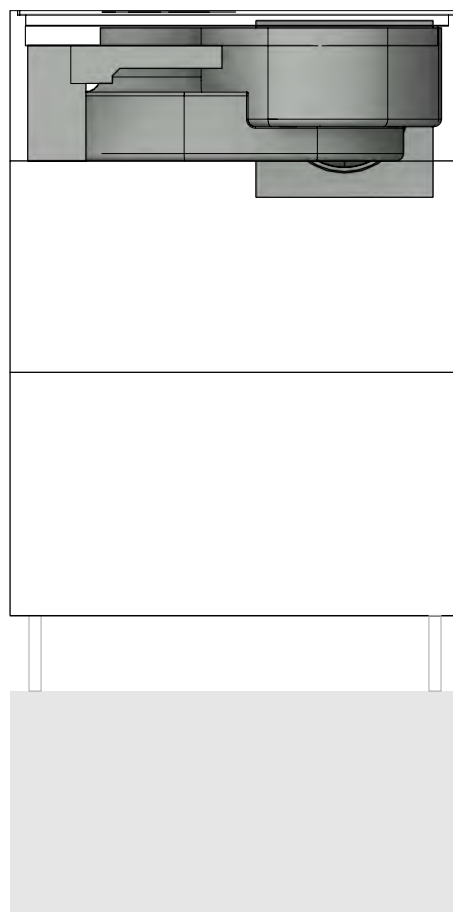


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA10120  
SPure Worktop back UEBR

Version, 1.0



LAYOUT Detail

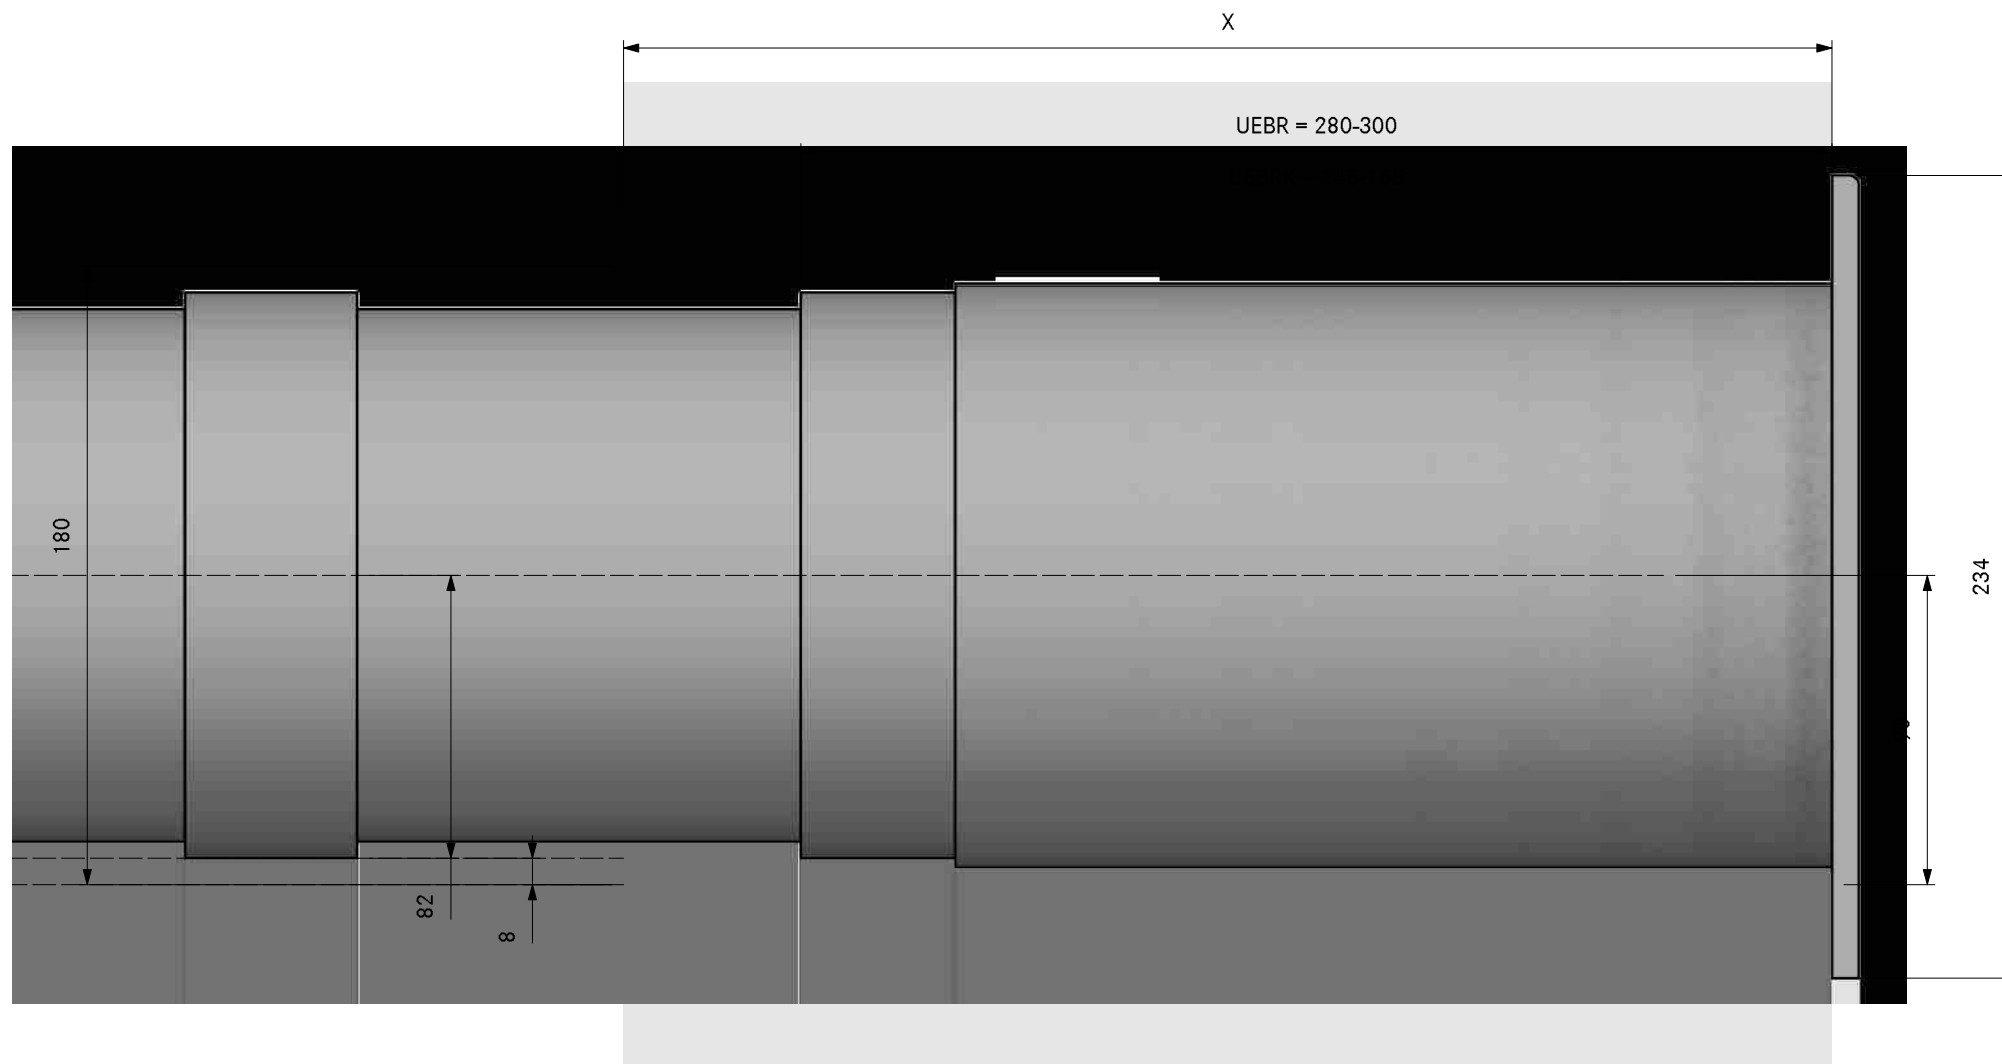






MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA10140  
SPure Worktop back swan neck UEBR

LAYOUT  
3D

Version, 1.0

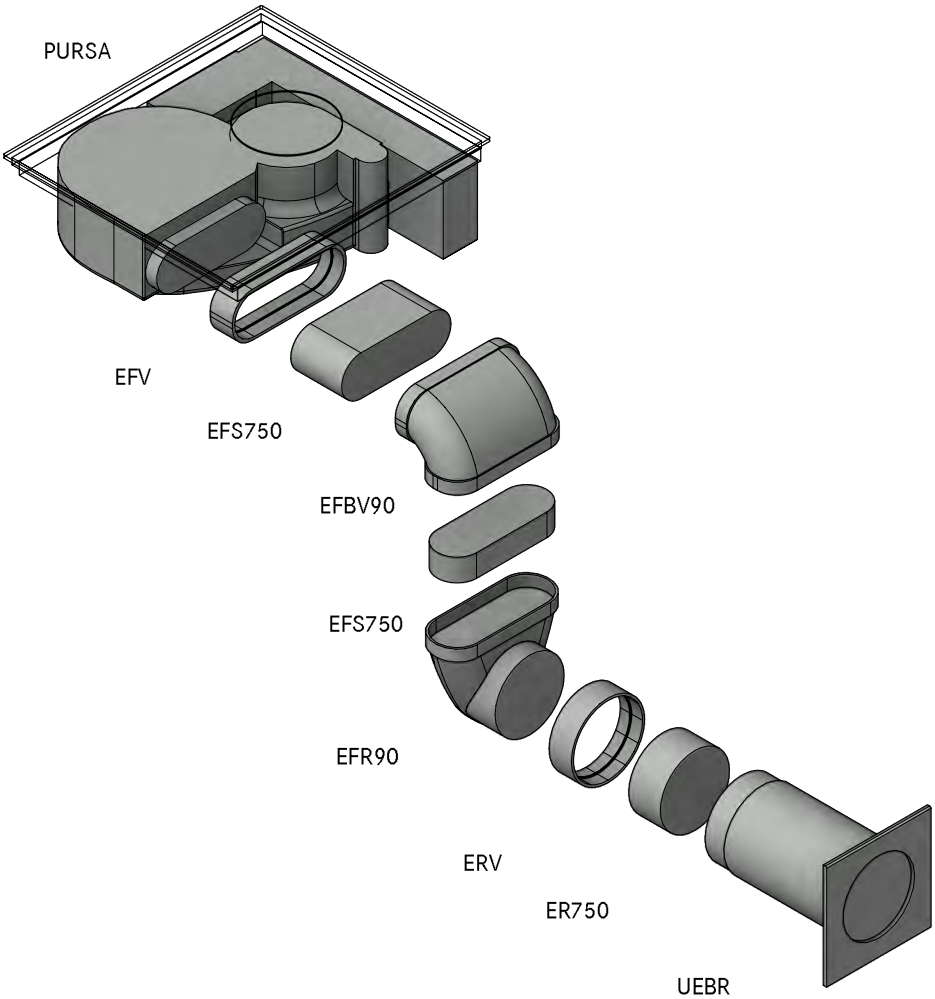

Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
1	EFBV90	90° bend flat vertical
1	EFR90	transition flat round 90°
1	EFV	duct connection flat
1	ERV	duct connection round
1	UEBR	3box wall sleeve round
1	ER750	round duct 750mm
1	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA10140  
SPure Worktop back swan neck UEBR

LAYOUT

GR

Version, 1.0

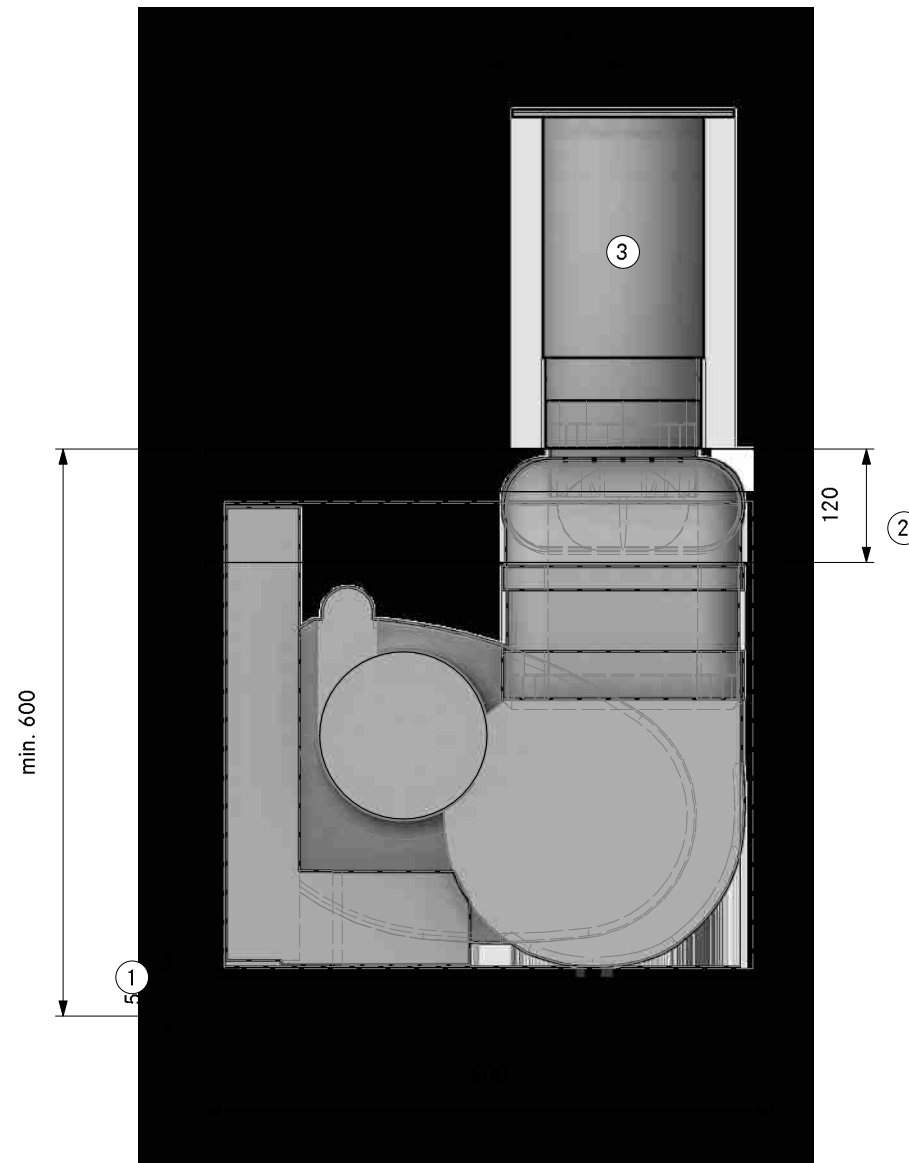

- ①. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- ②. Min. space required
- ③. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA10140**  
**SPure Worktop back swan neck UEBR**

LAYOUT

**SA**

Version, 1.0

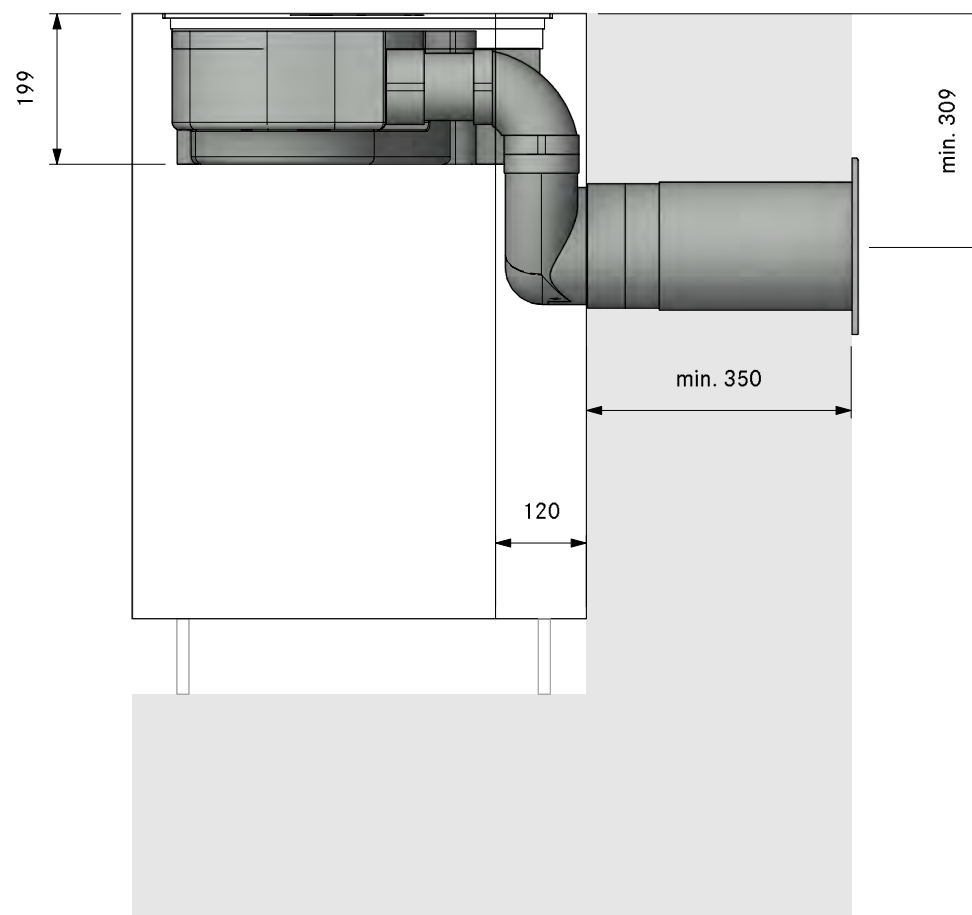


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA10140**  
**SPure Worktop back swan neck UEBR**

LAYOUT

**FA**

Version, 1.0

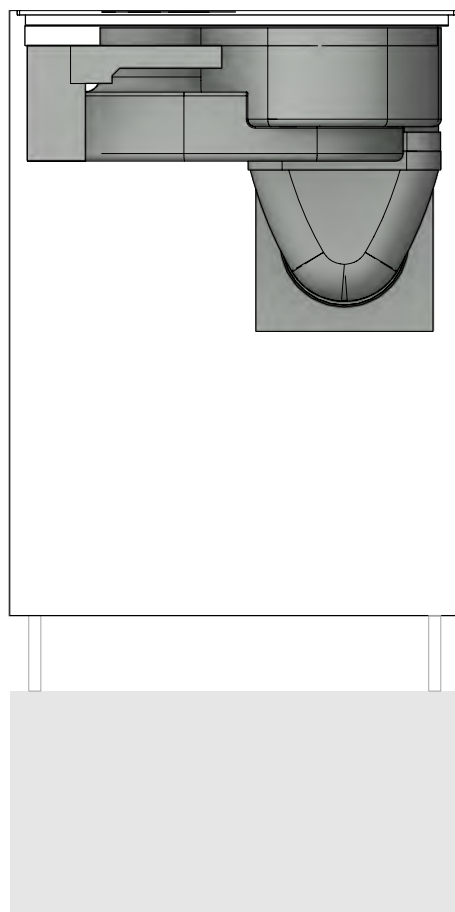

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


SPA10140  
SPure Worktop back swan neck UEBR

Version, 1.0



LAYOUT

Detail

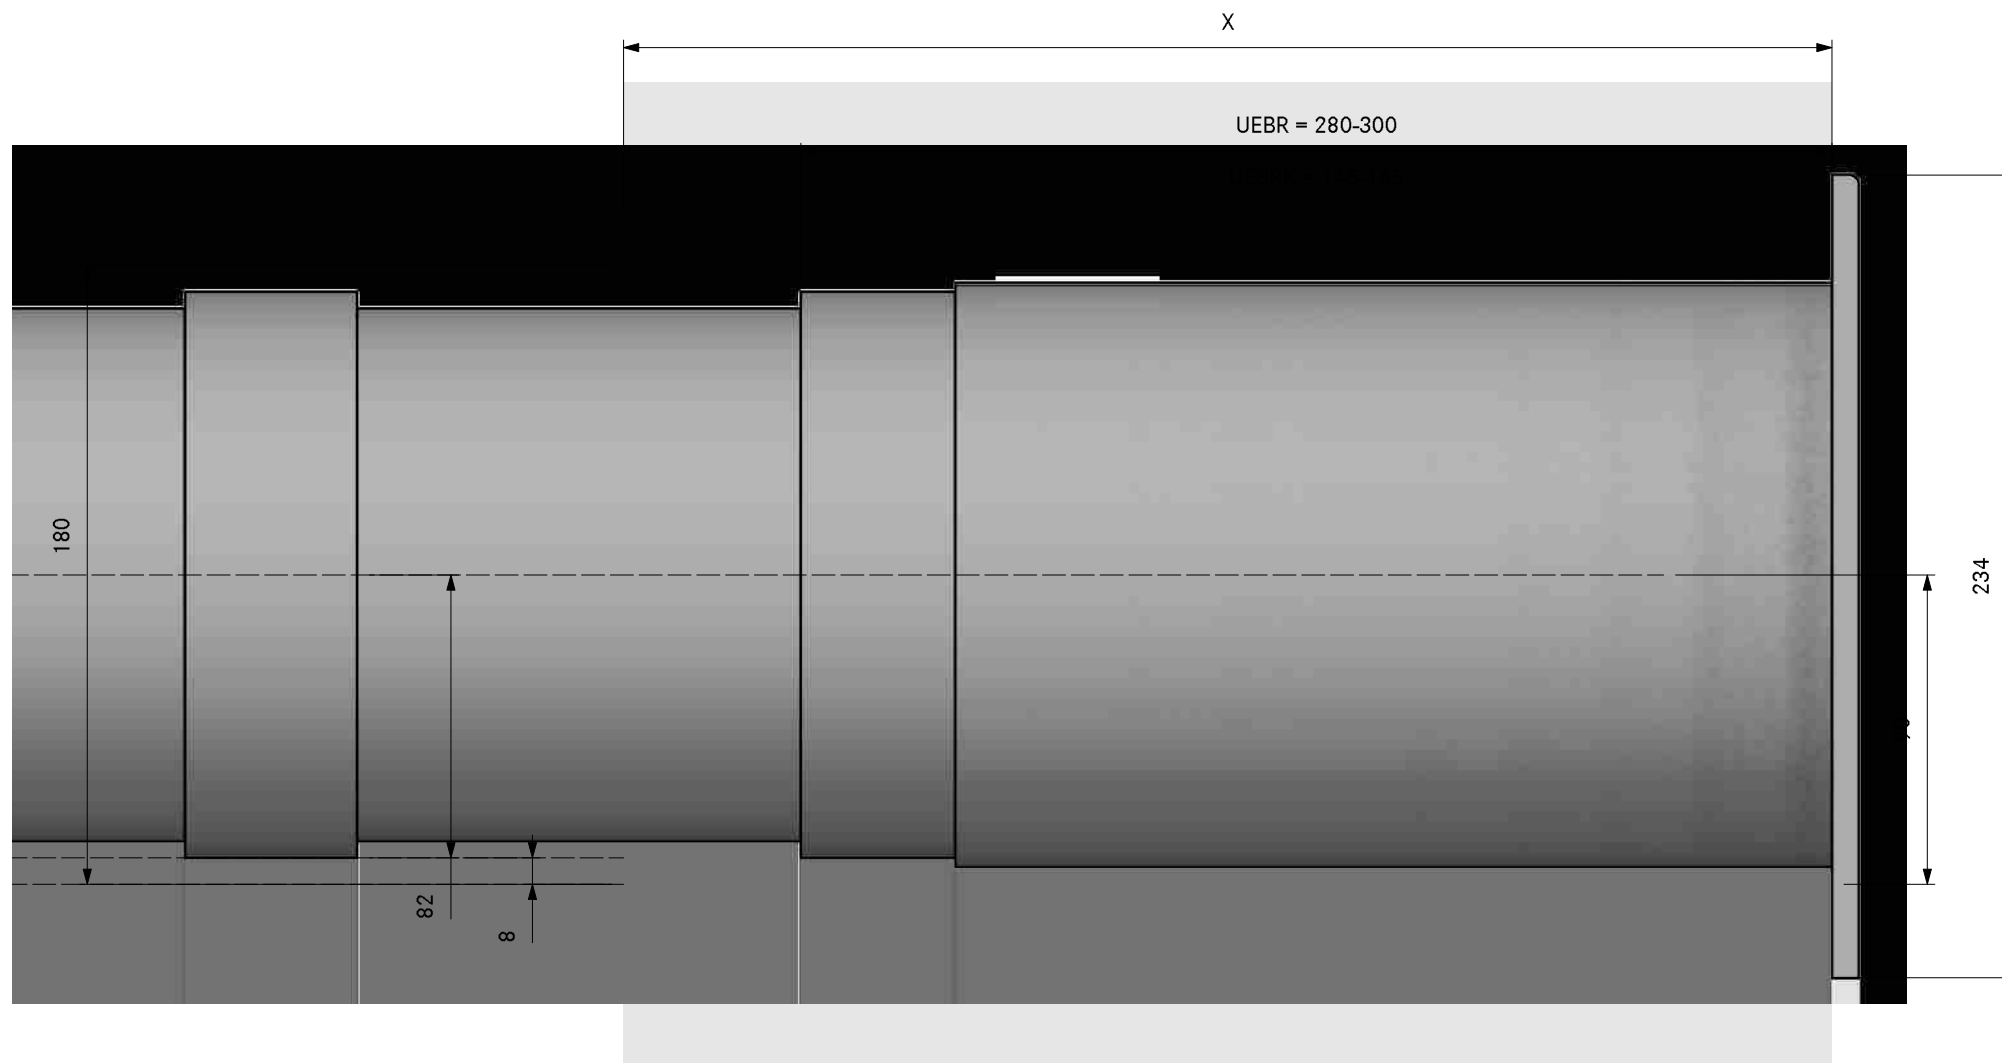




LAYOUT

3D

Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
1	EFBH90	90° bend flat horizontal
1	EFBV90	90° bend flat vertical
1	EFRG	bridge flat round straight
1	EFV	duct connection flat
1	UEBR	3box wall sleeve round
1	ER750	round duct 750mm
2	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

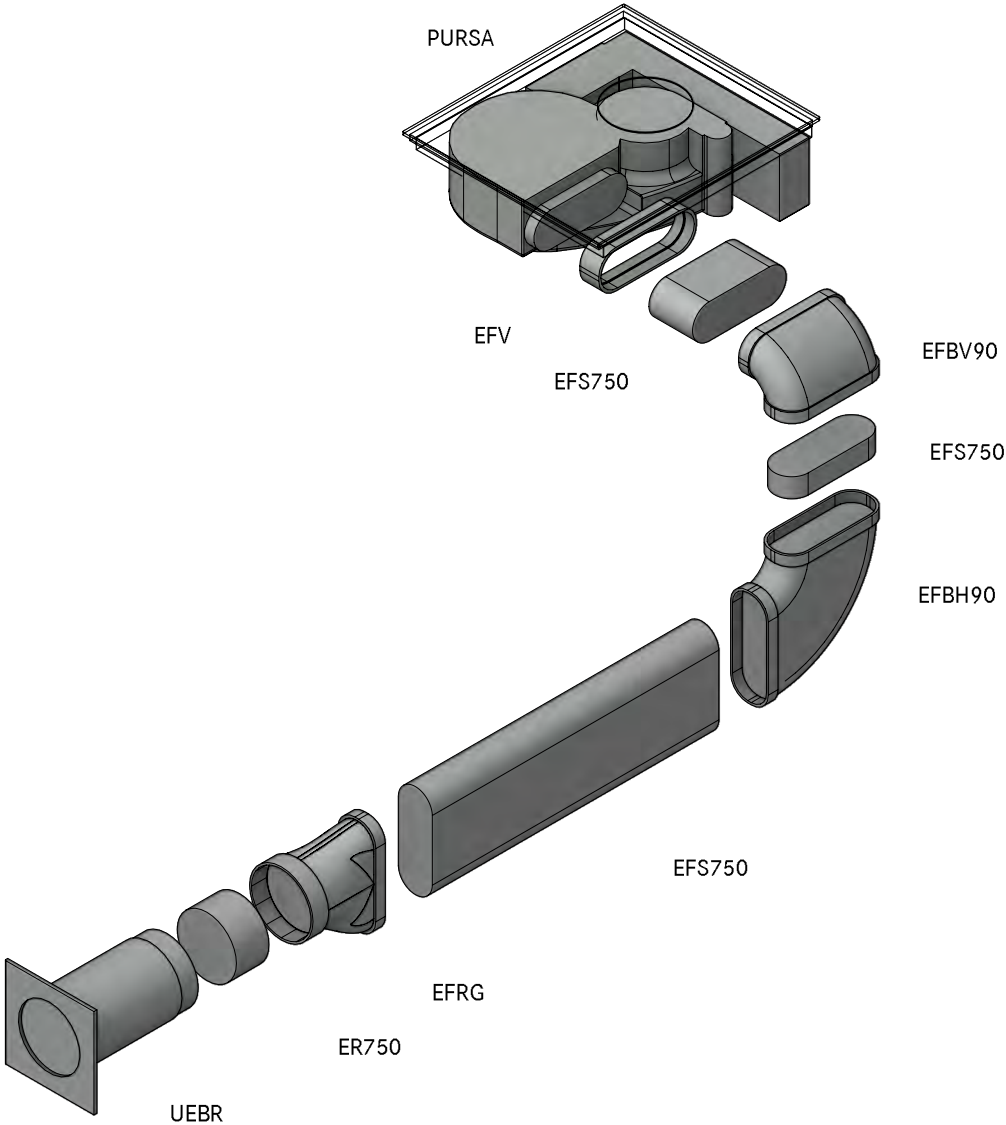



MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


SPA10224  
SPure Worktop right UEBR upright

LAYOUT

GR

Version, 1.0

**BORA**

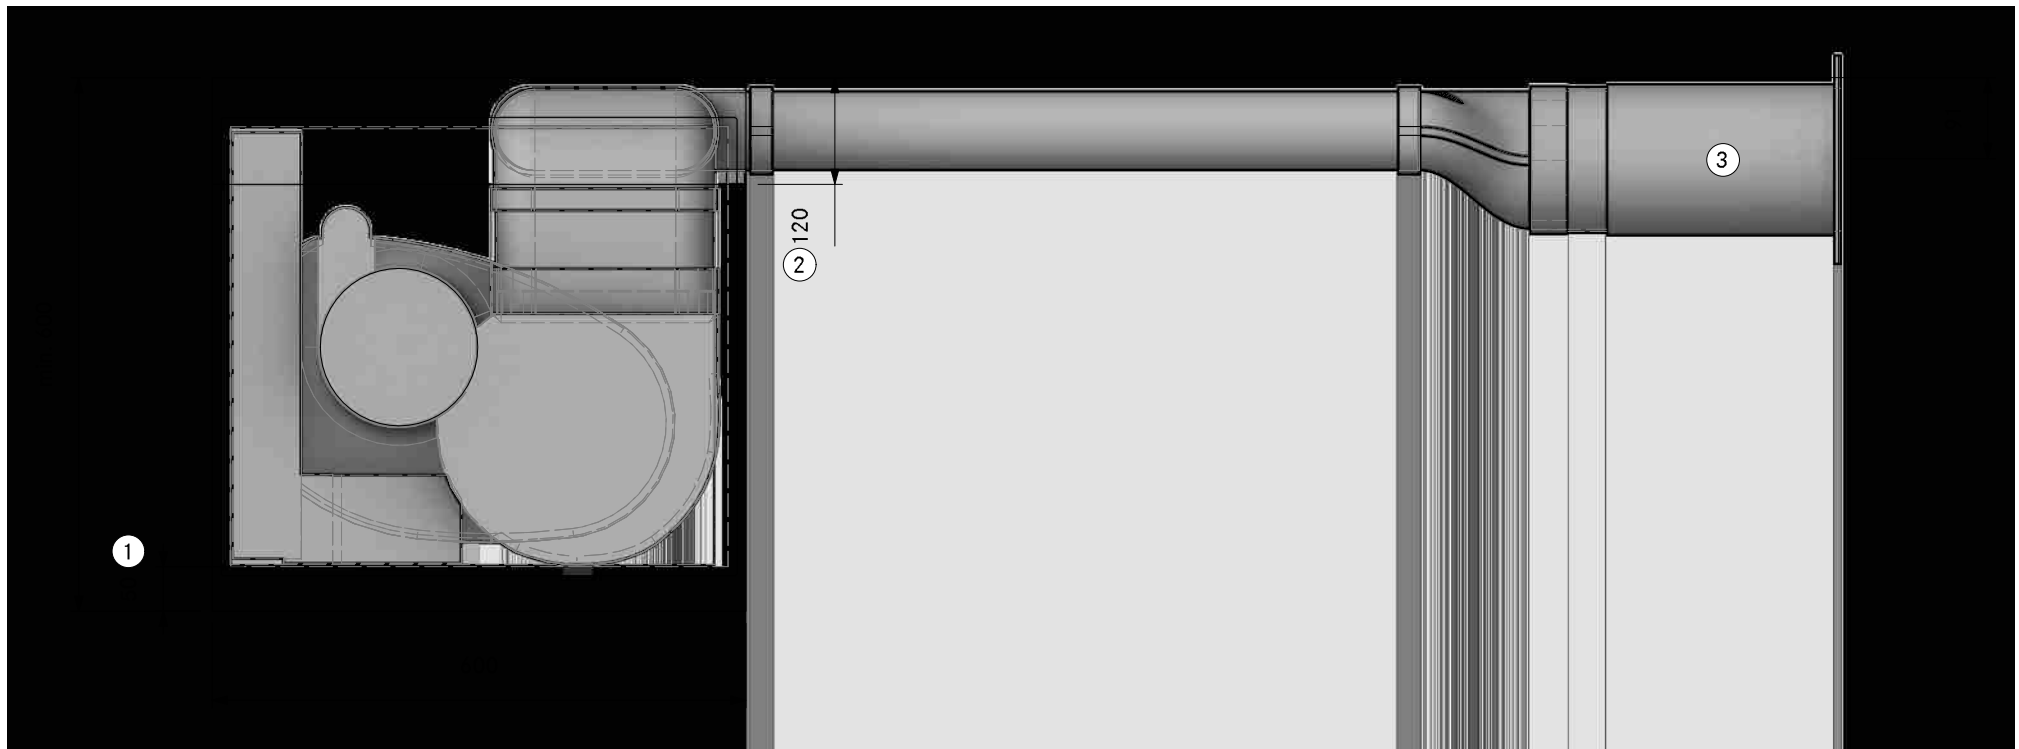

- ①. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- ②. Min. space required
- ③. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA10224**  
**SPure Worktop right UEBR upright**

LAYOUT

**SA**

Version, 1.0

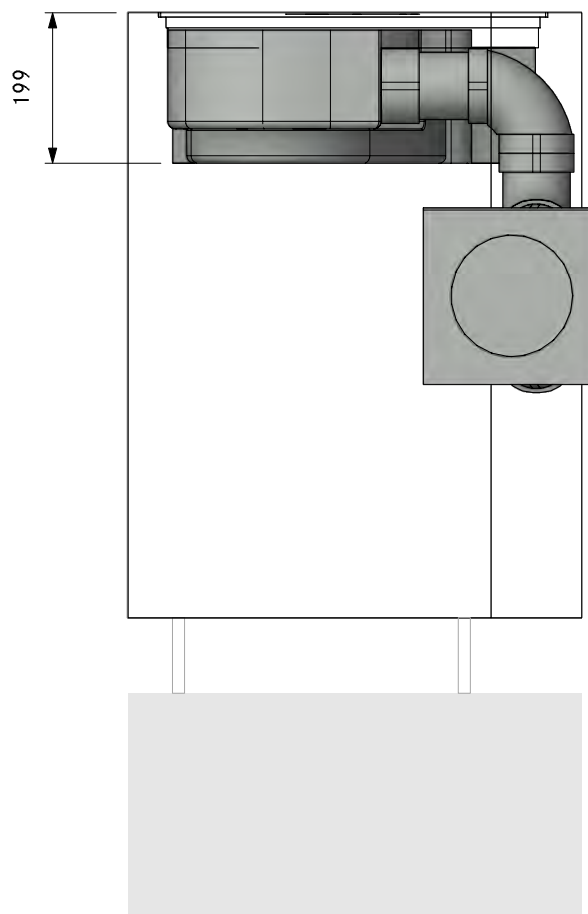


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


SPA10224  
SPure Worktop right UEBR upright

LAYOUT


FA

Version, 1.0

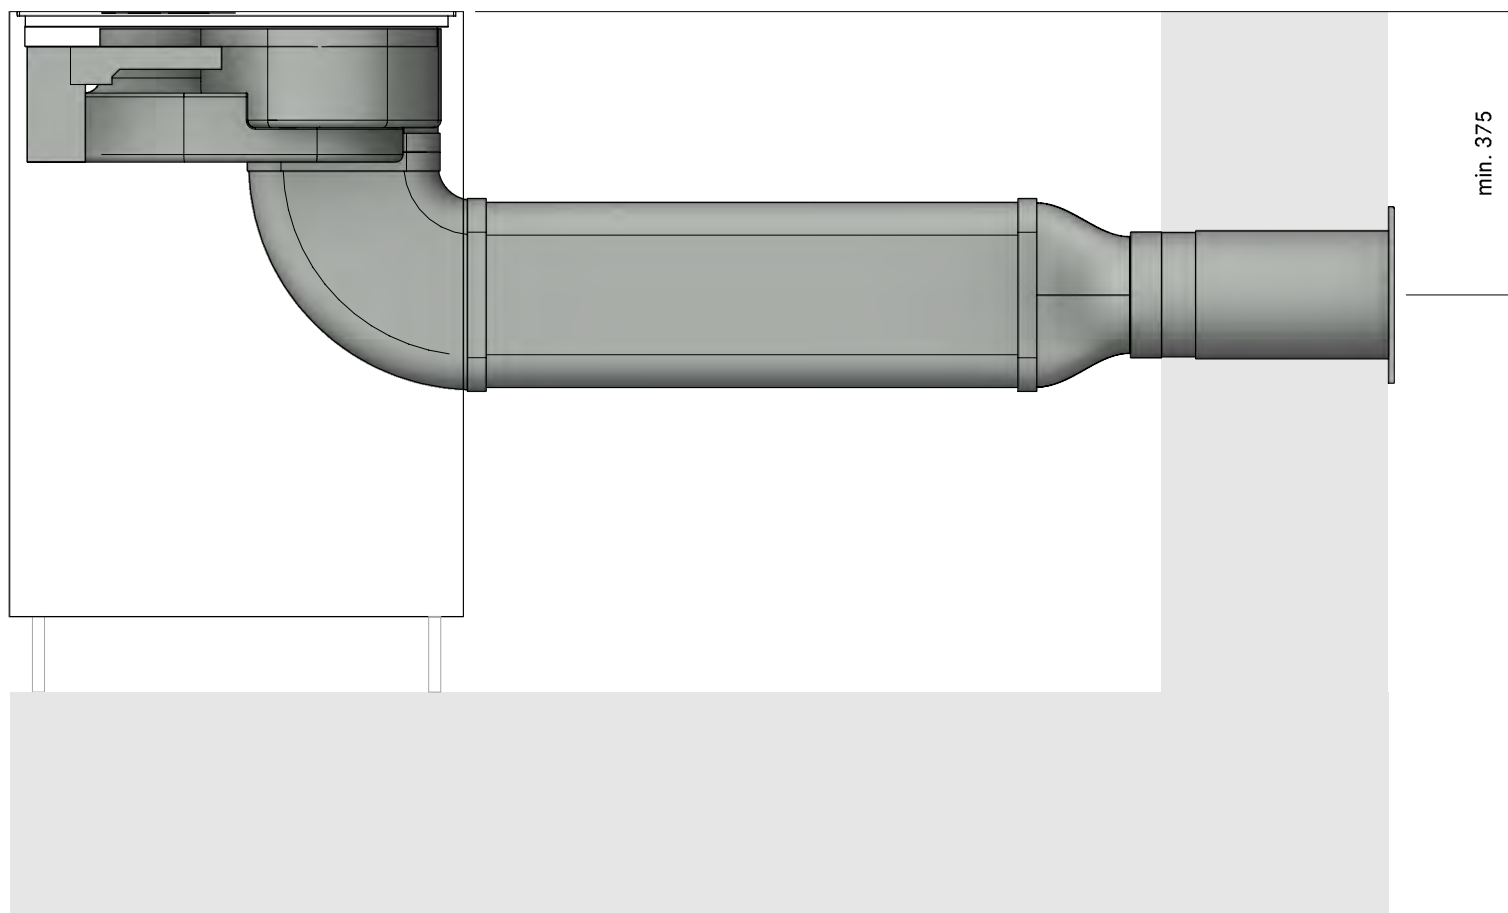

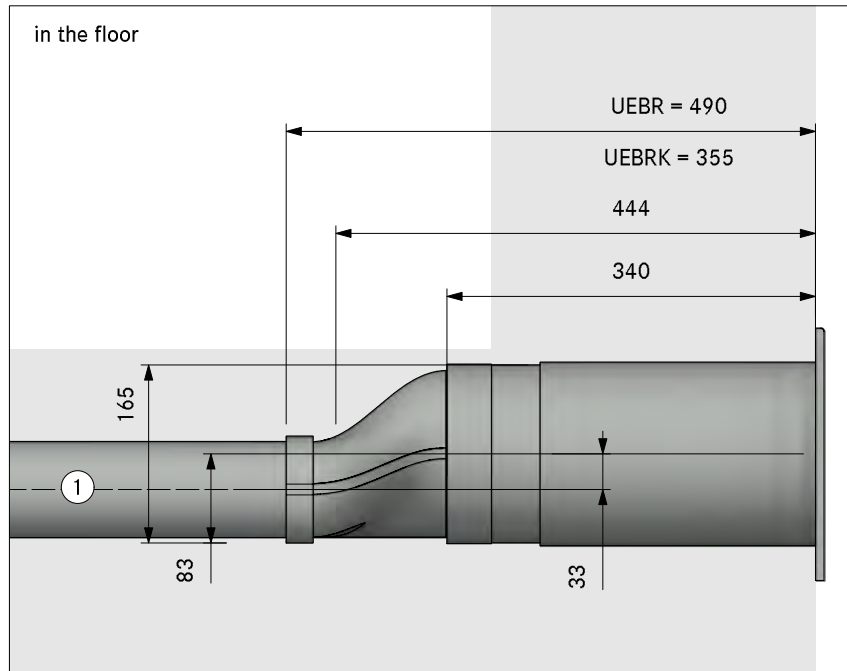


in the plinth area

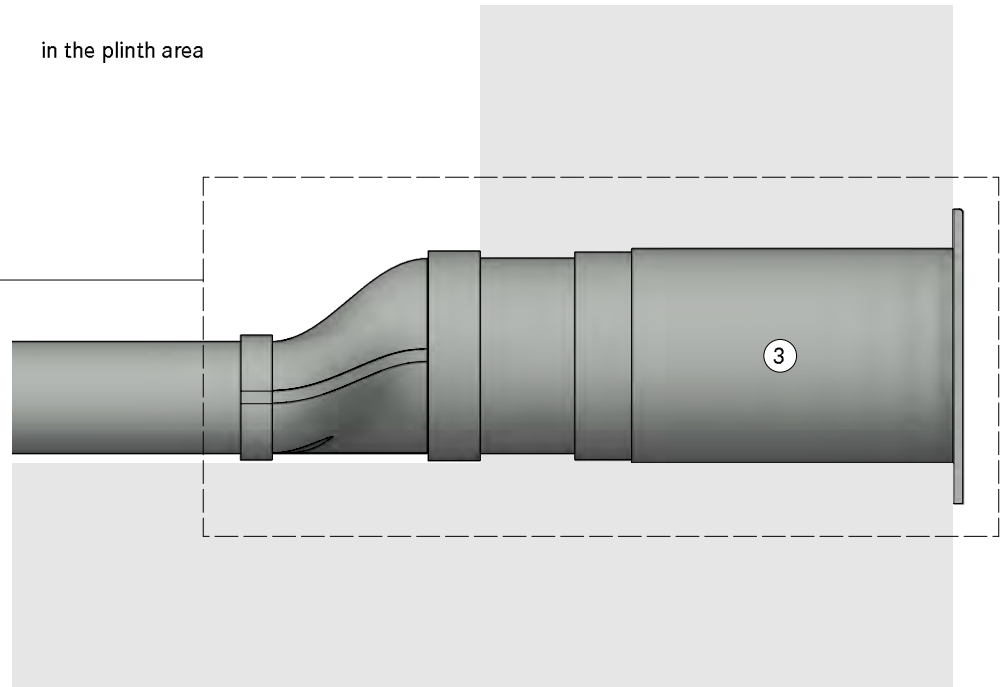


1. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
2. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

in the cellar

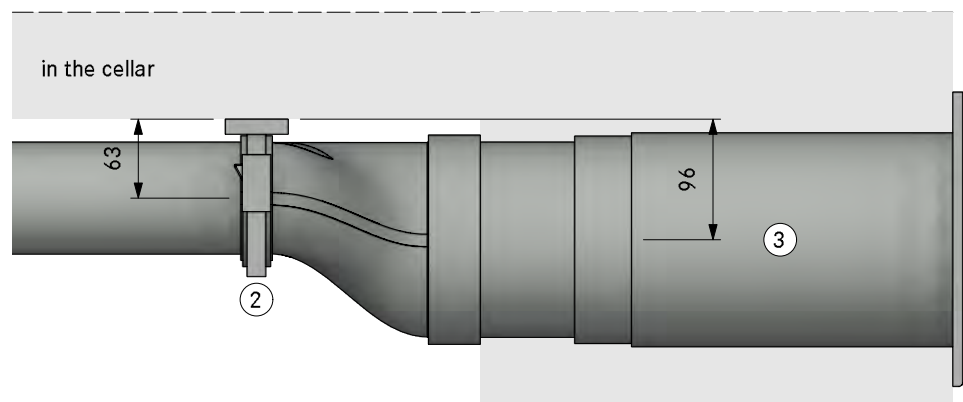




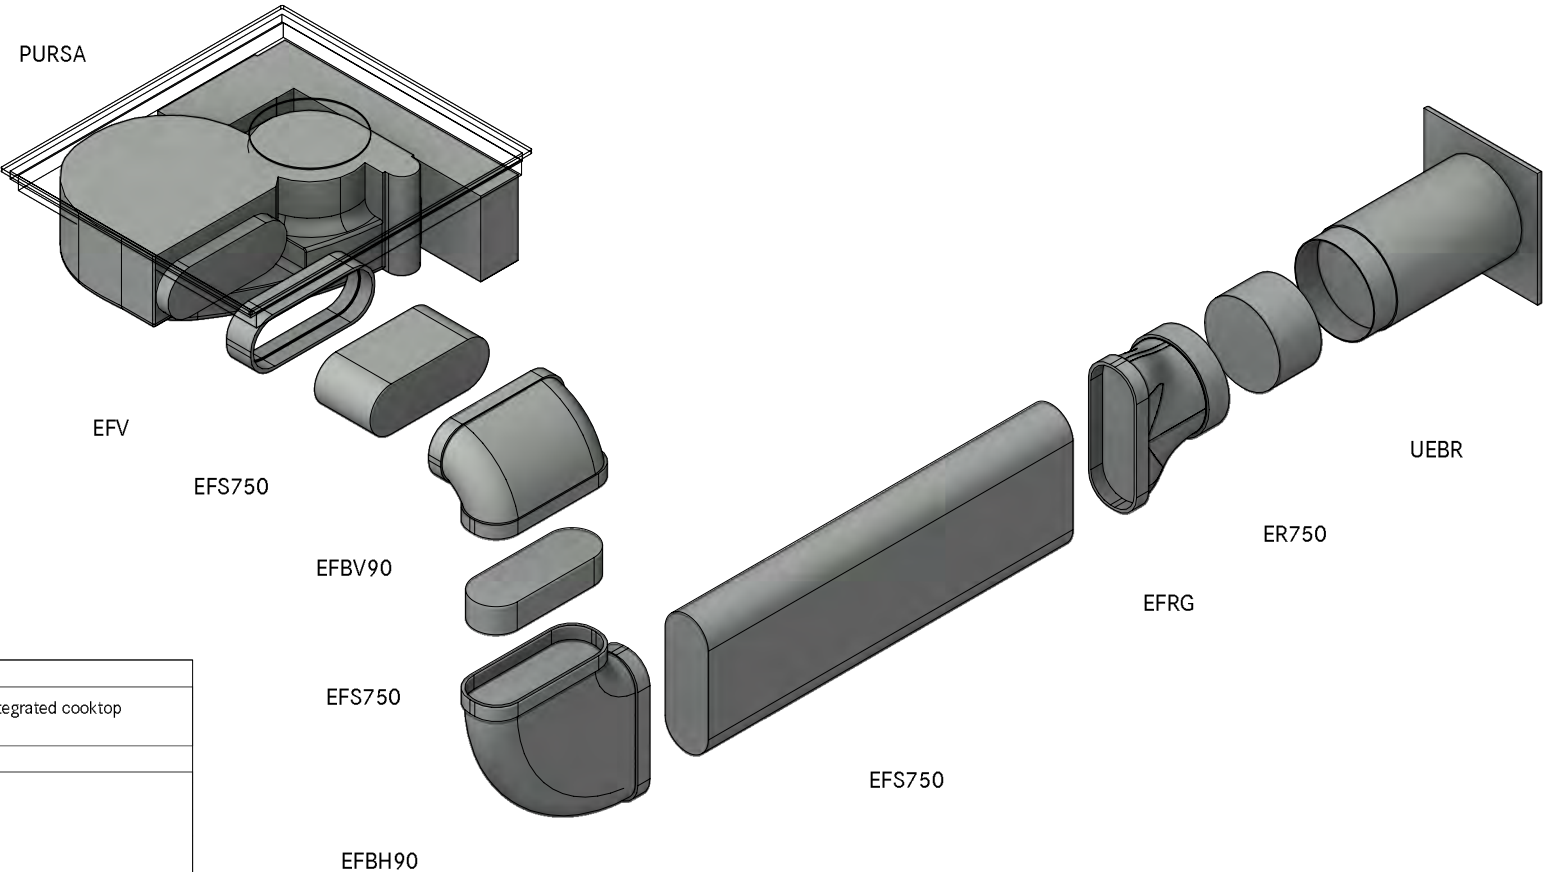

Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
1	EFBH90	90° bend flat horizontal
1	EFBV90	90° bend flat vertical
1	EFRG	bridge flat round straight
1	EFV	duct connection flat
1	UEBR	3box wall sleeve round
1	ER750	round duct 750mm
2	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

LAYOUT

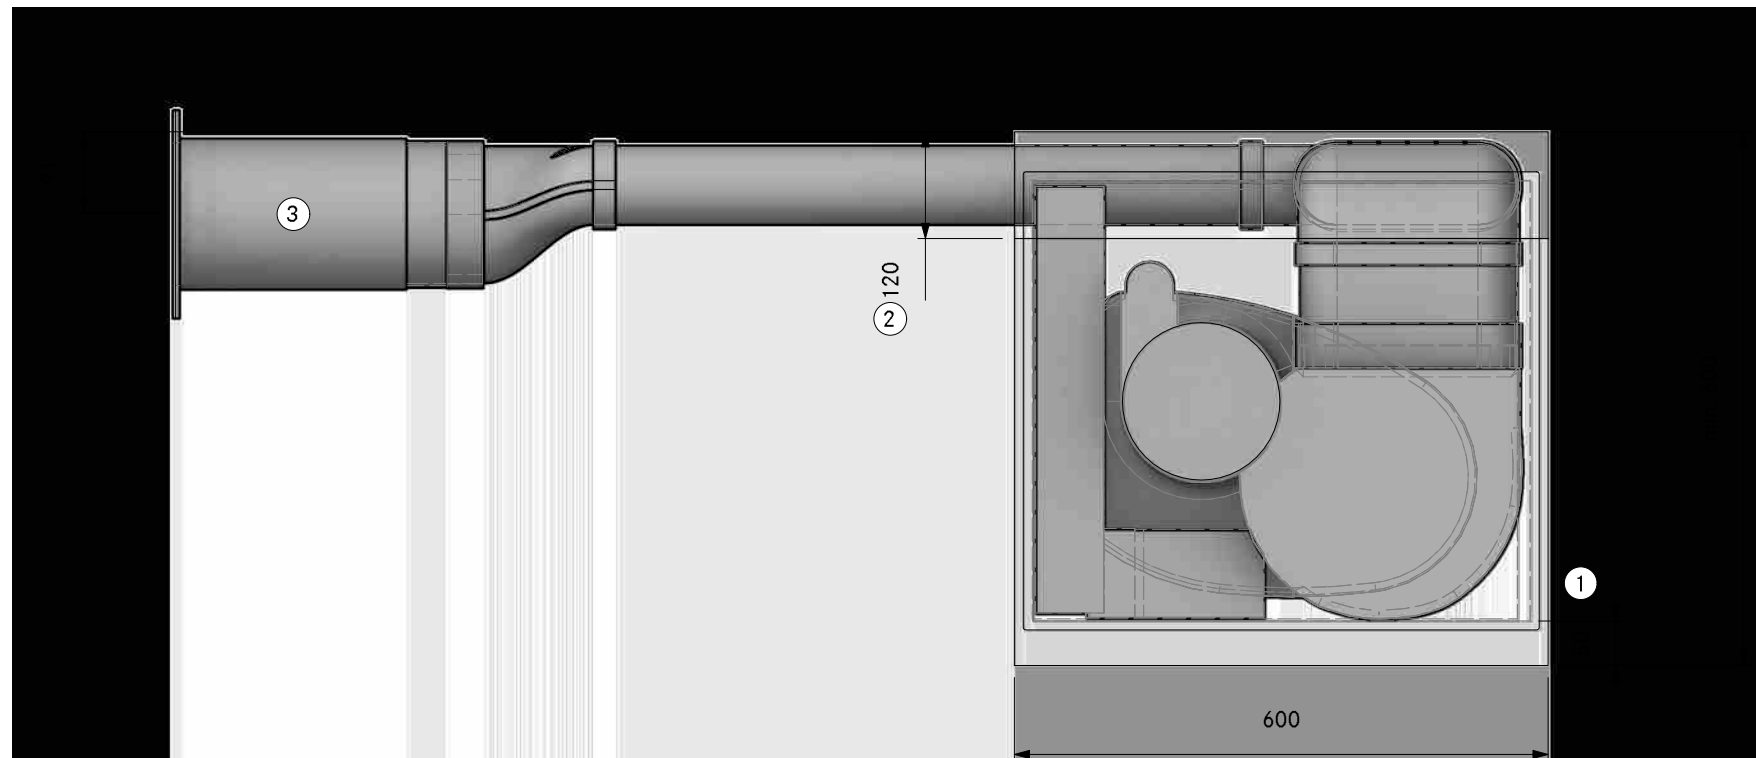

- ①. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- ②. Min. space required
- ③. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA10424**  
**SPure Worktop left UEBR upright**

LAYOUT

**SA**

Version, 1.0

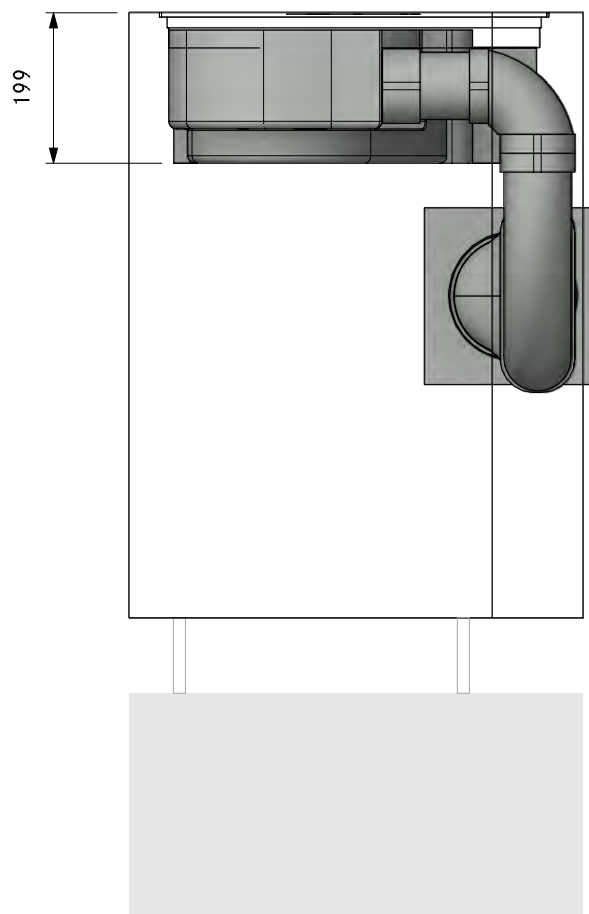




MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA10424  
SPure Worktop left UEBR upright

LAYOUT


FA

Version, 1.0

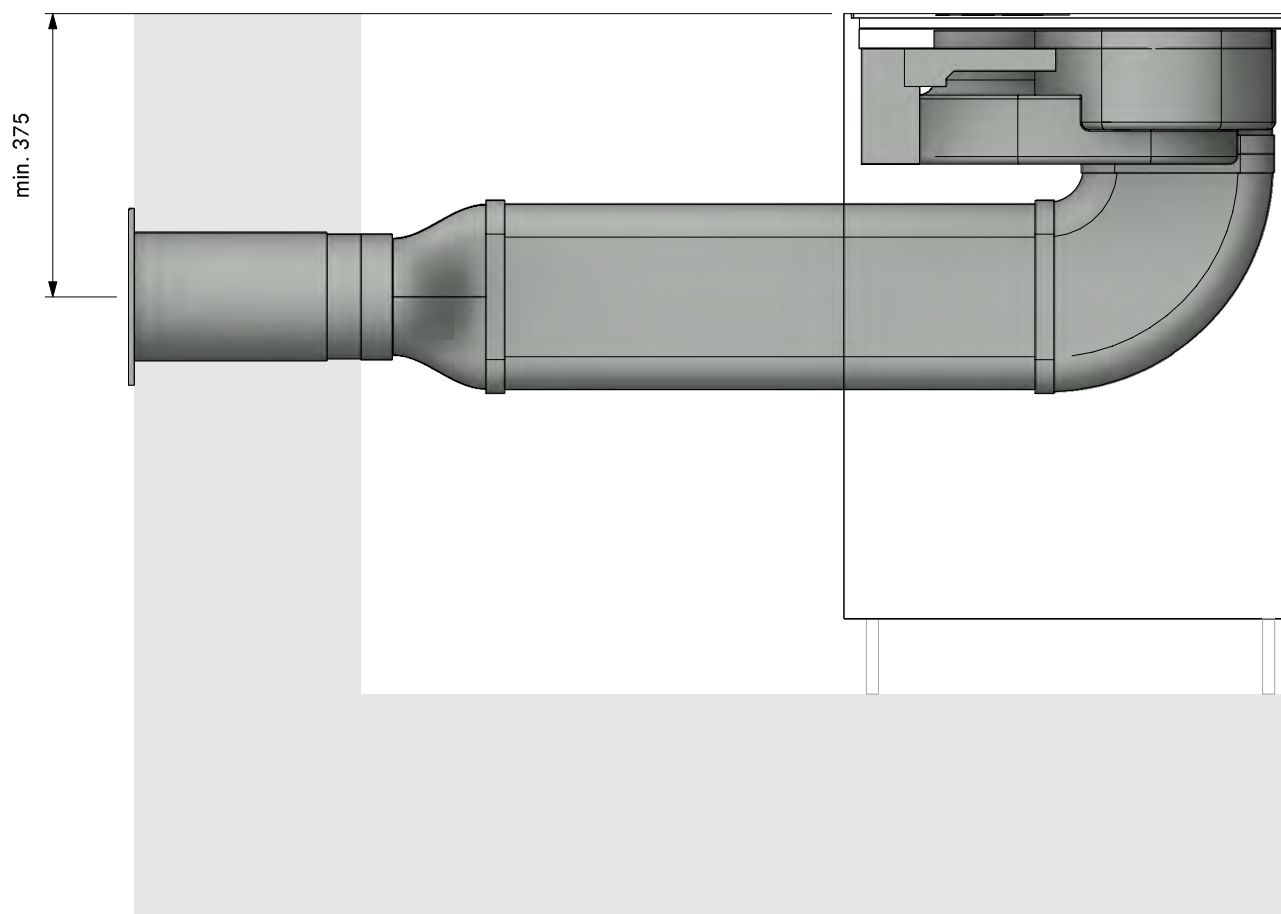


LAYOUT

Detail

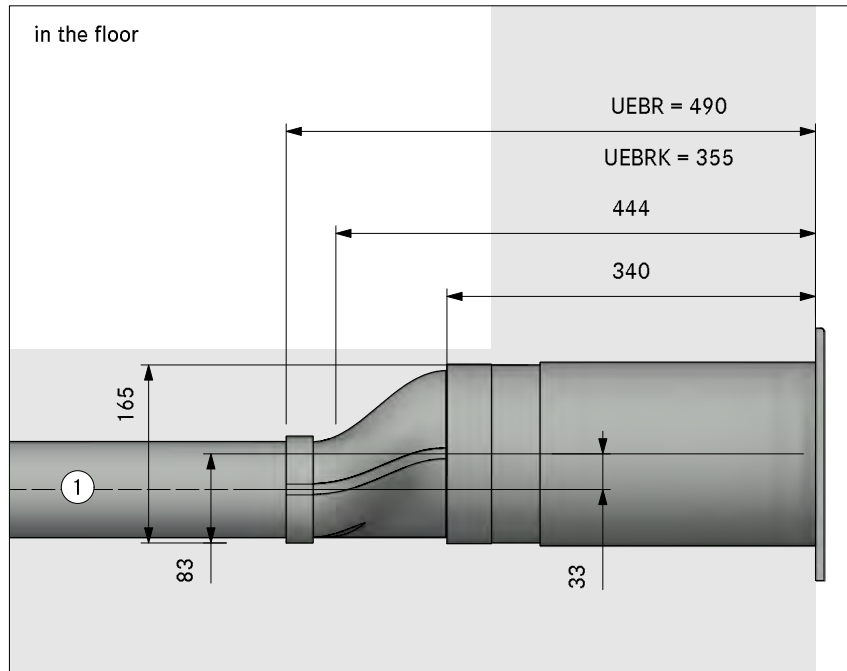


in the plinth area

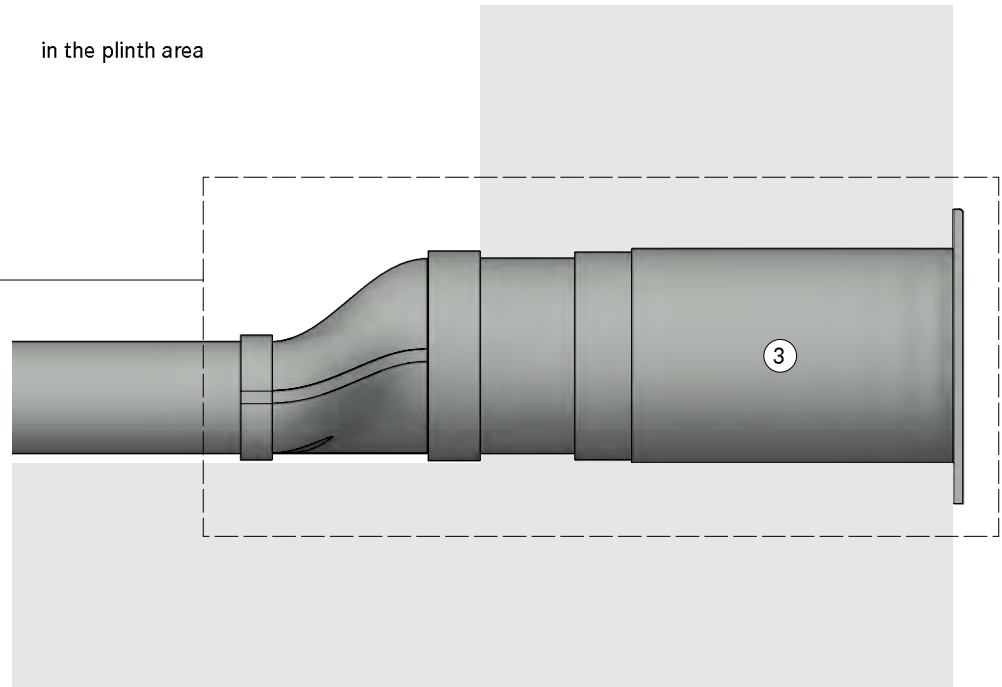

1. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
2. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract


in the cellar

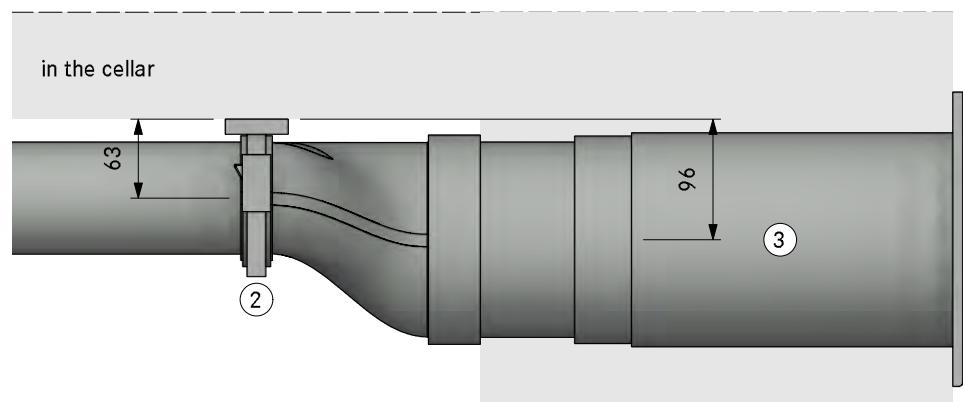


# Plinth

direction of the ducting to the right . . . . .	48
direction of the ducting to the left . . . . .	72

Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
1	EFBH90	90° bend flat horizontal
2	EFBV90	90° bend flat vertical
2	EFV	duct connection flat
1	UEBF	3box wall sleeve
3	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

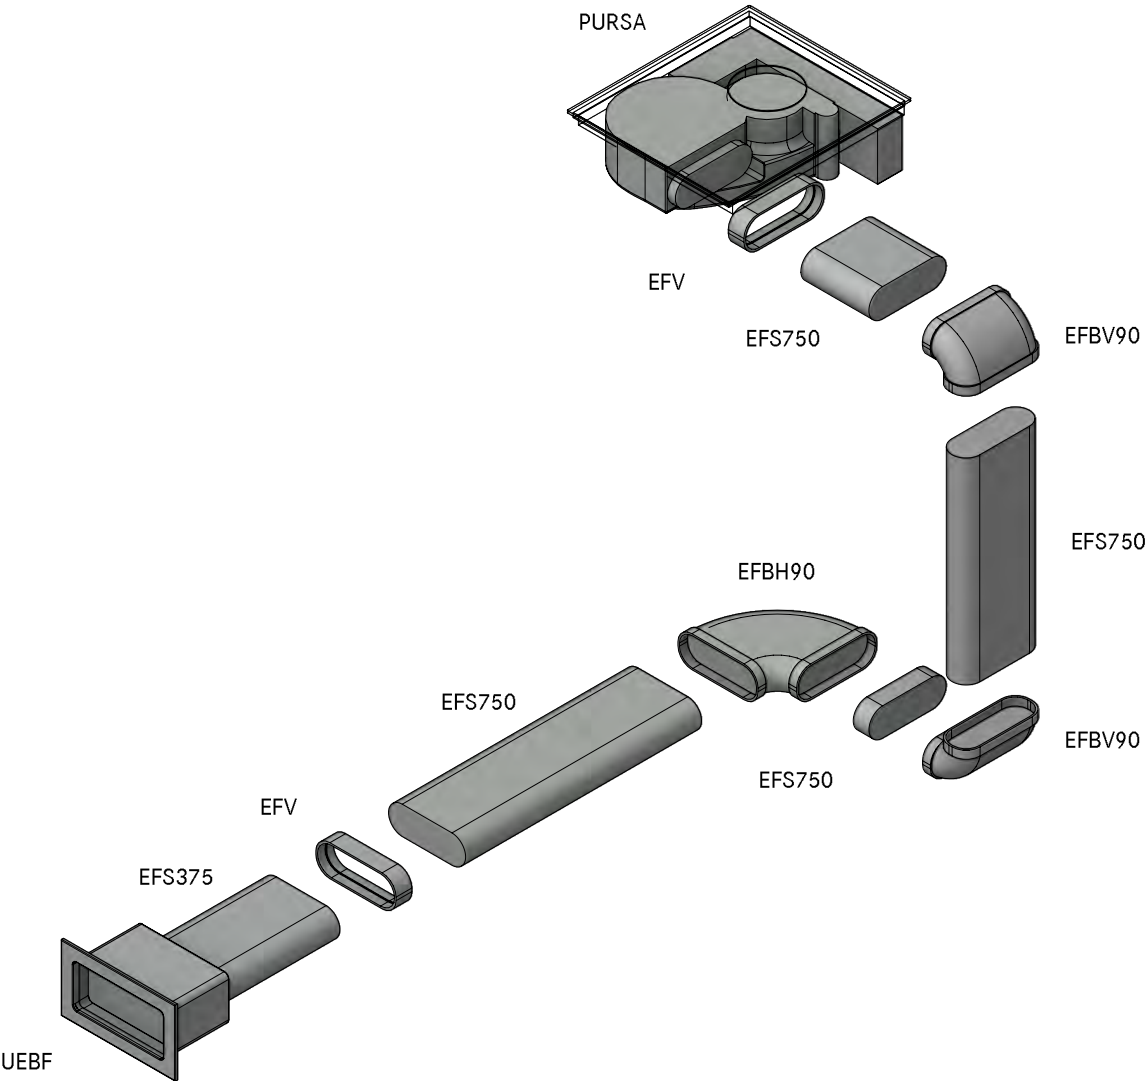

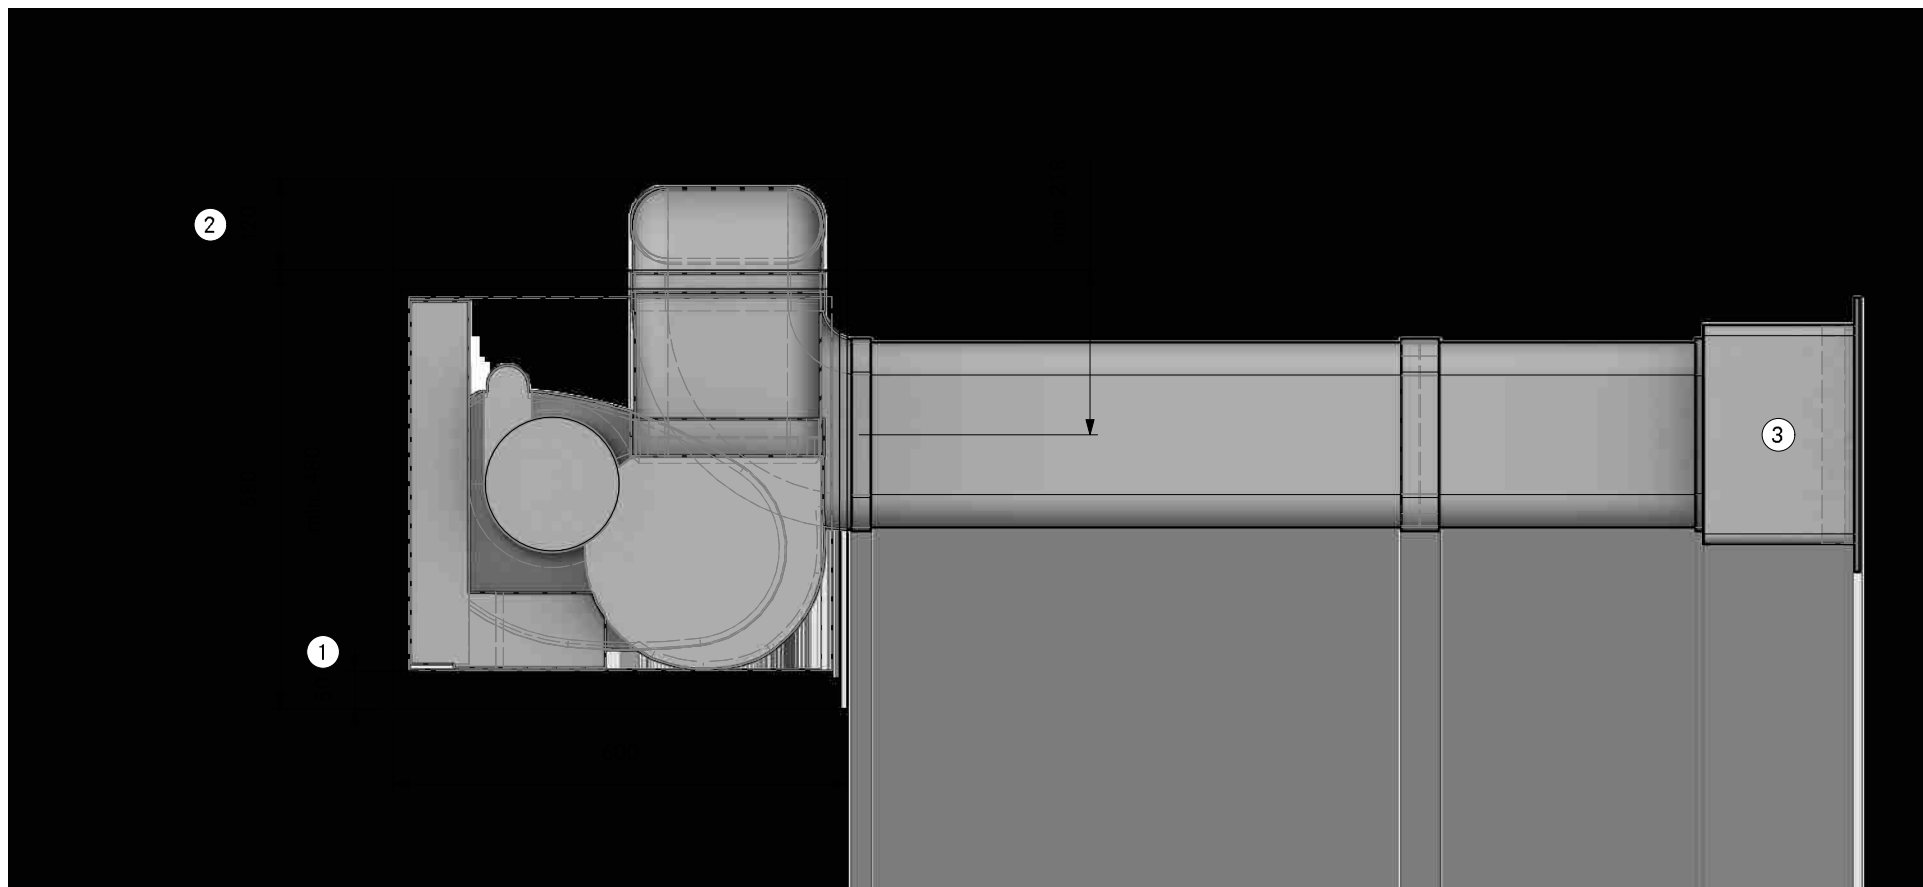

①. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.

②. Min. space required

③. Hole size 310 x 155mm  
Bottom of hole to middle of duct 71mm.  
Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA20210  
SPure Plinth right UEBF

LAYOUT

SA

Version, 1.0

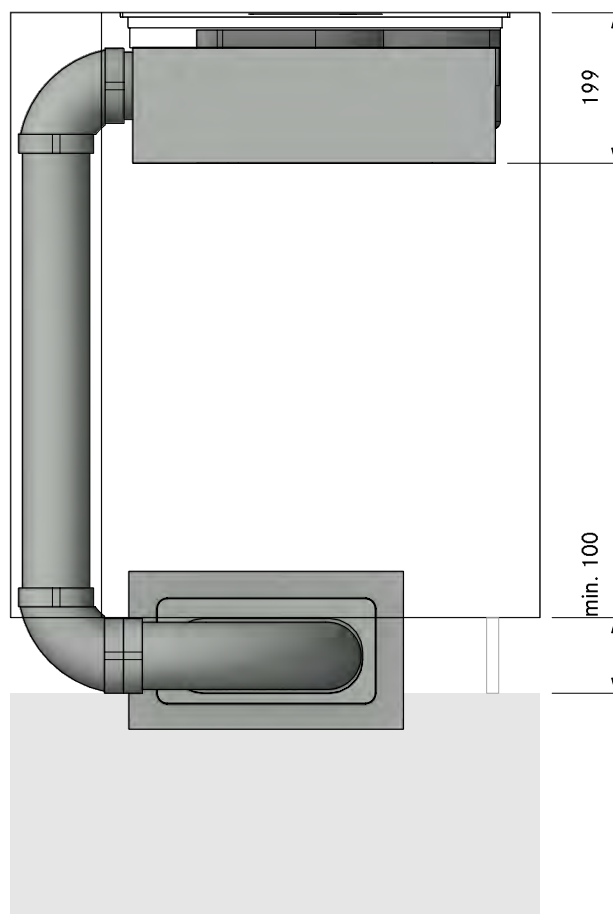


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA20210  
SPure Plinth right UEBF

LAYOUT

FA

Version, 1.0

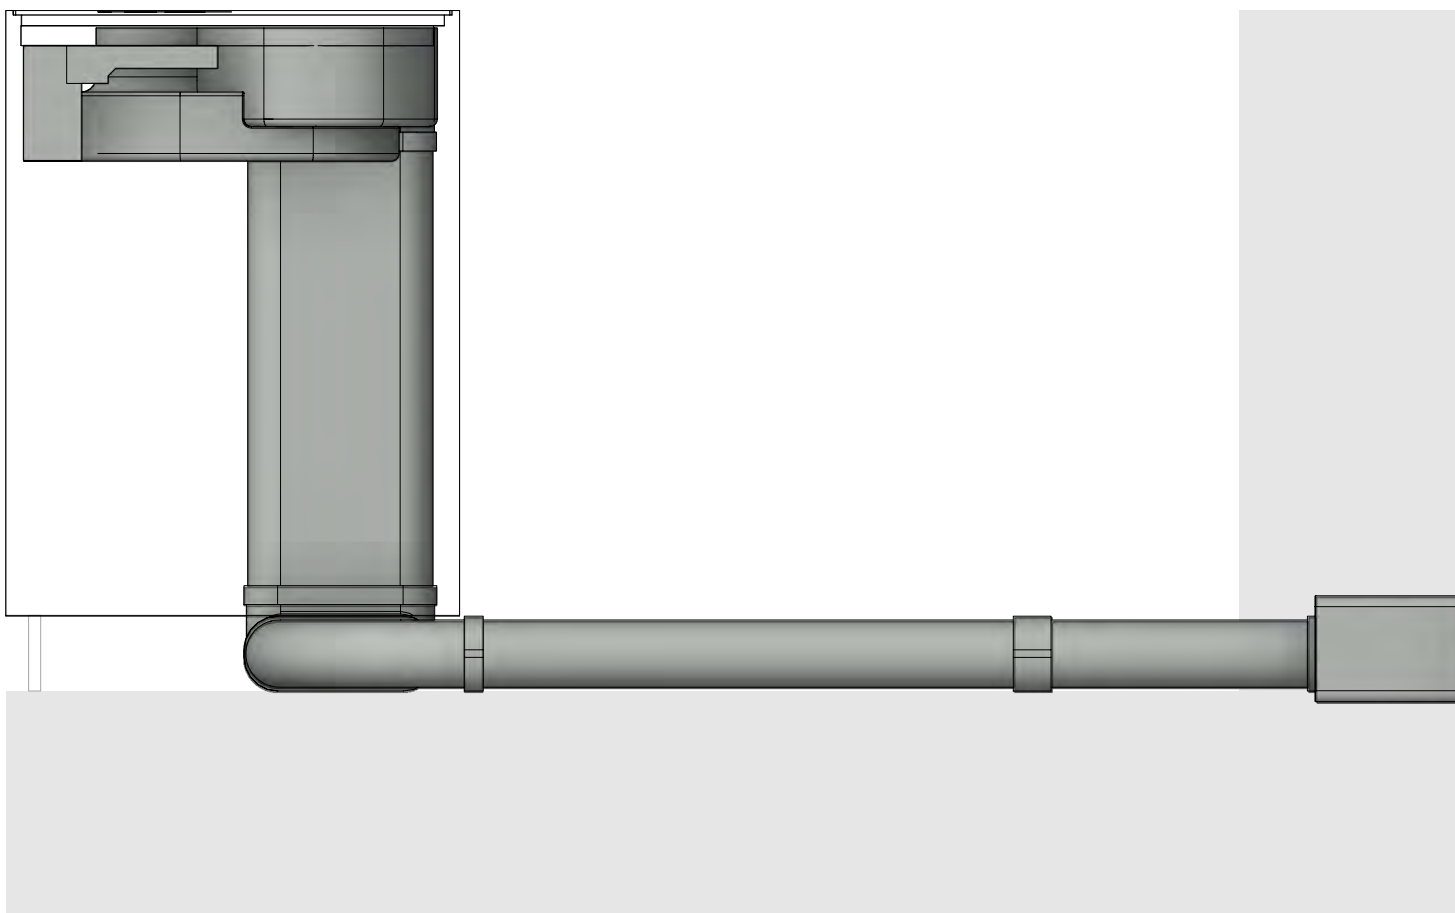


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA20210  
SPure Plinth right UEBF

LAYOUT

Detail


Version, 1.0

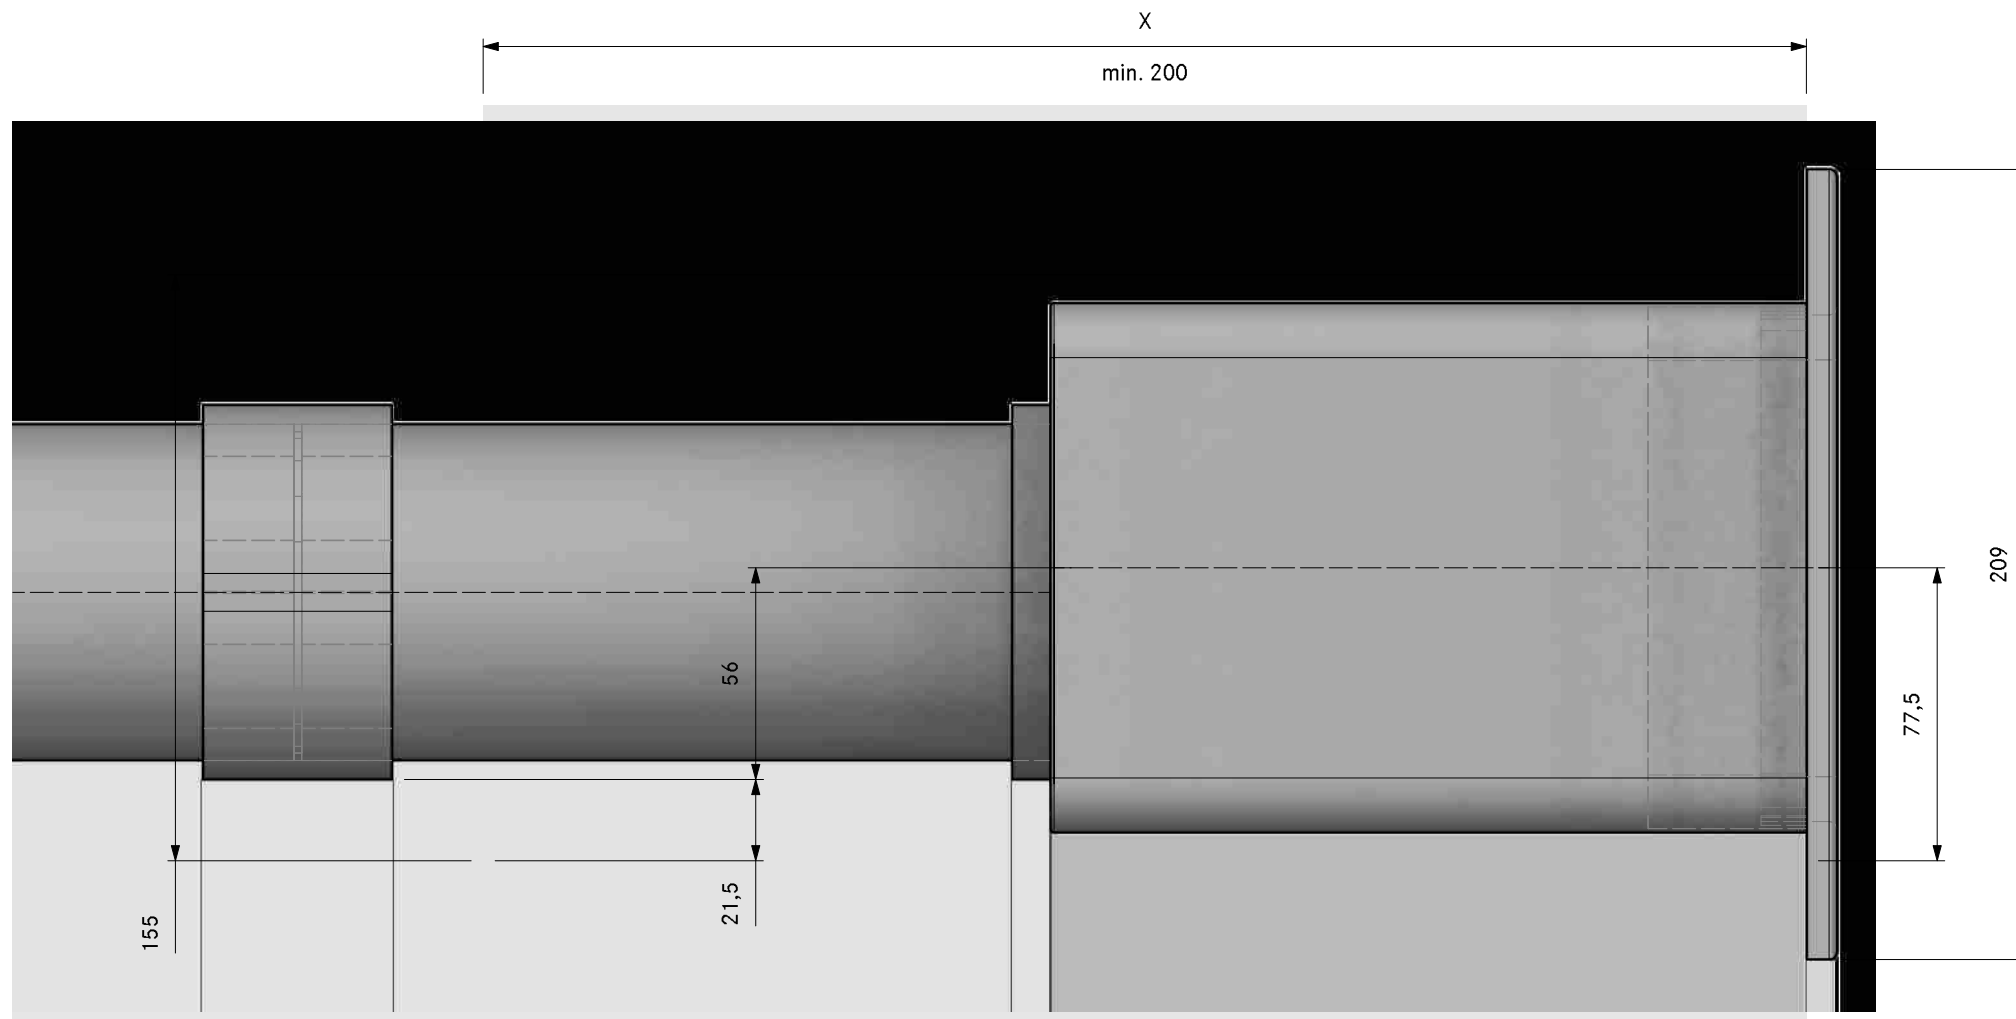






Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
1	EFBH90	90° bend flat horizontal
2	EFBV90	90° bend flat vertical
1	EFRG	bridge flat round straight
1	EFV	duct connection flat
1	UEBR	3box wall sleeve round
1	ER750	round duct 750mm
3	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

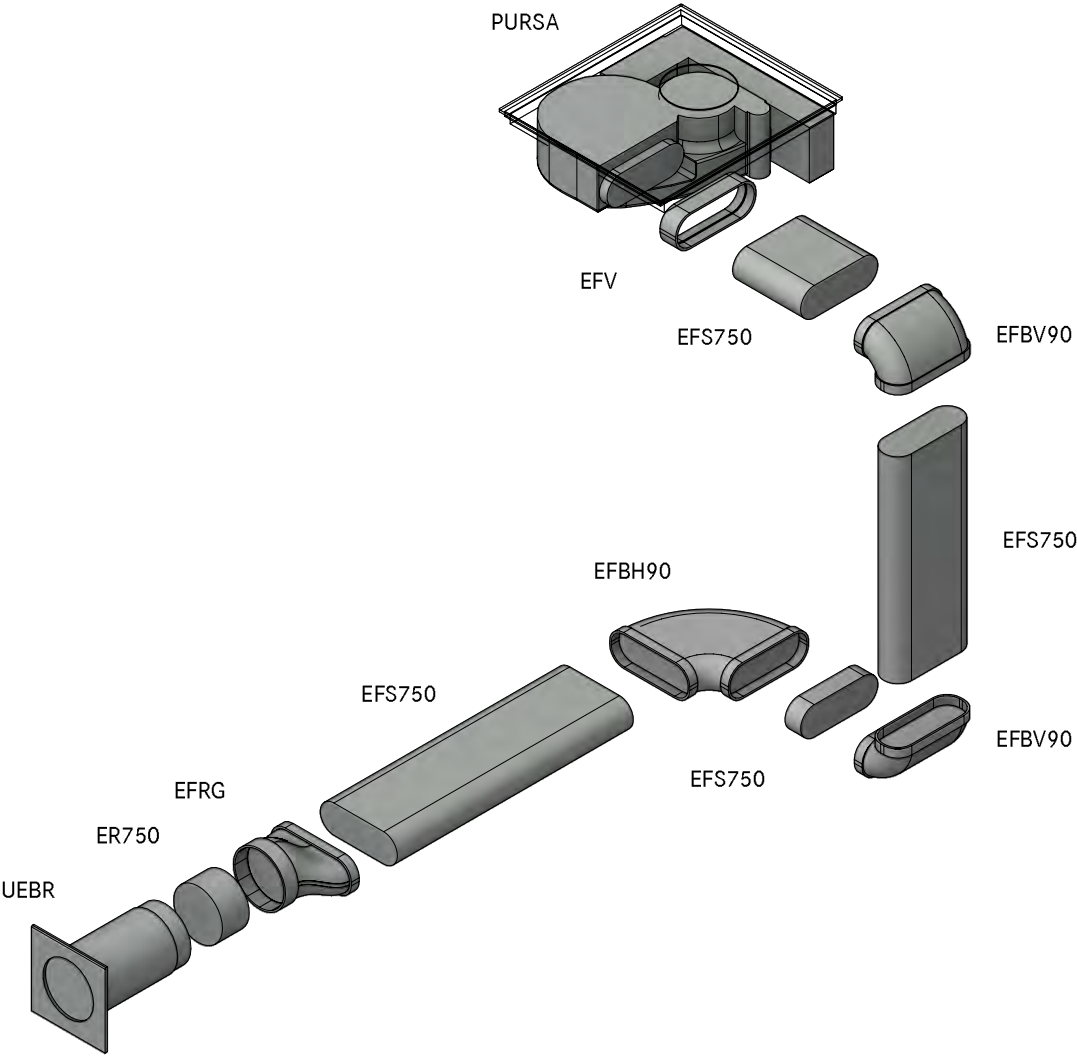

MODELPLAN	
REFERENCE NUMBER	SPA20220
COMPOSITION	SPure Plinth
LAYOUT	GR

Version, 1.0

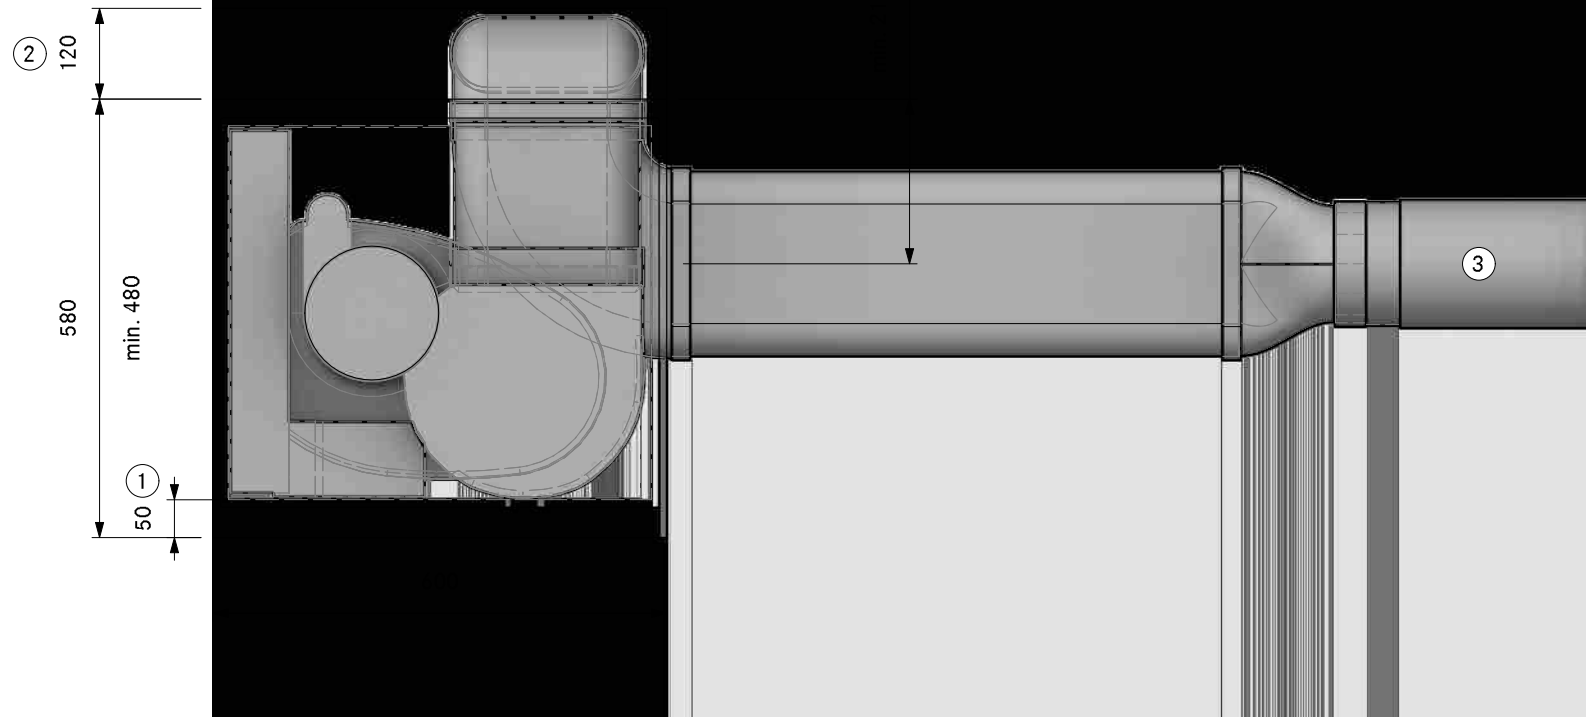

- ①. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- ②. Min. space required
- ③. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA20220  
SPure Plinth right UEBR

LAYOUT

SA

Version, 1.0

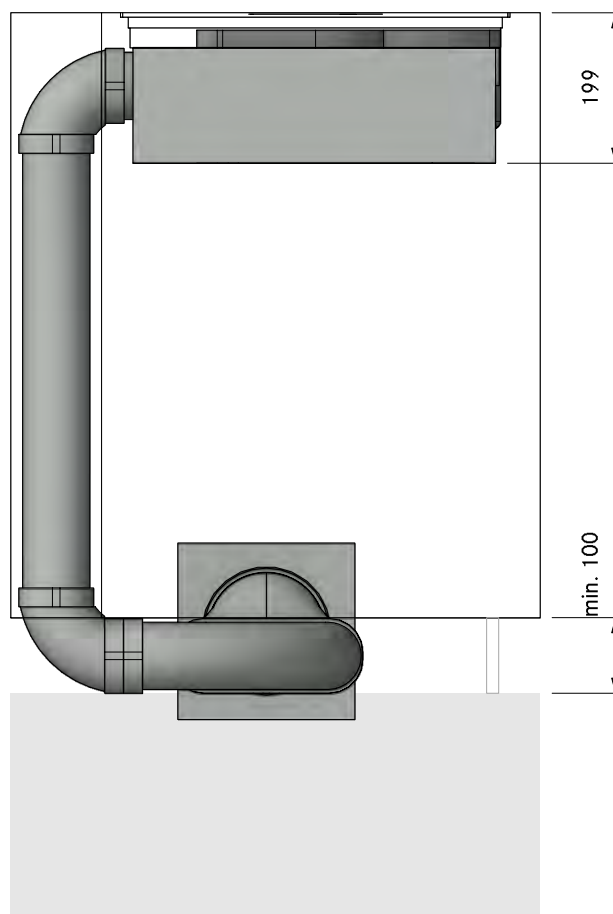


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


SPA20220  
SPure Plinth right UEBR

LAYOUT


FA

Version, 1.0

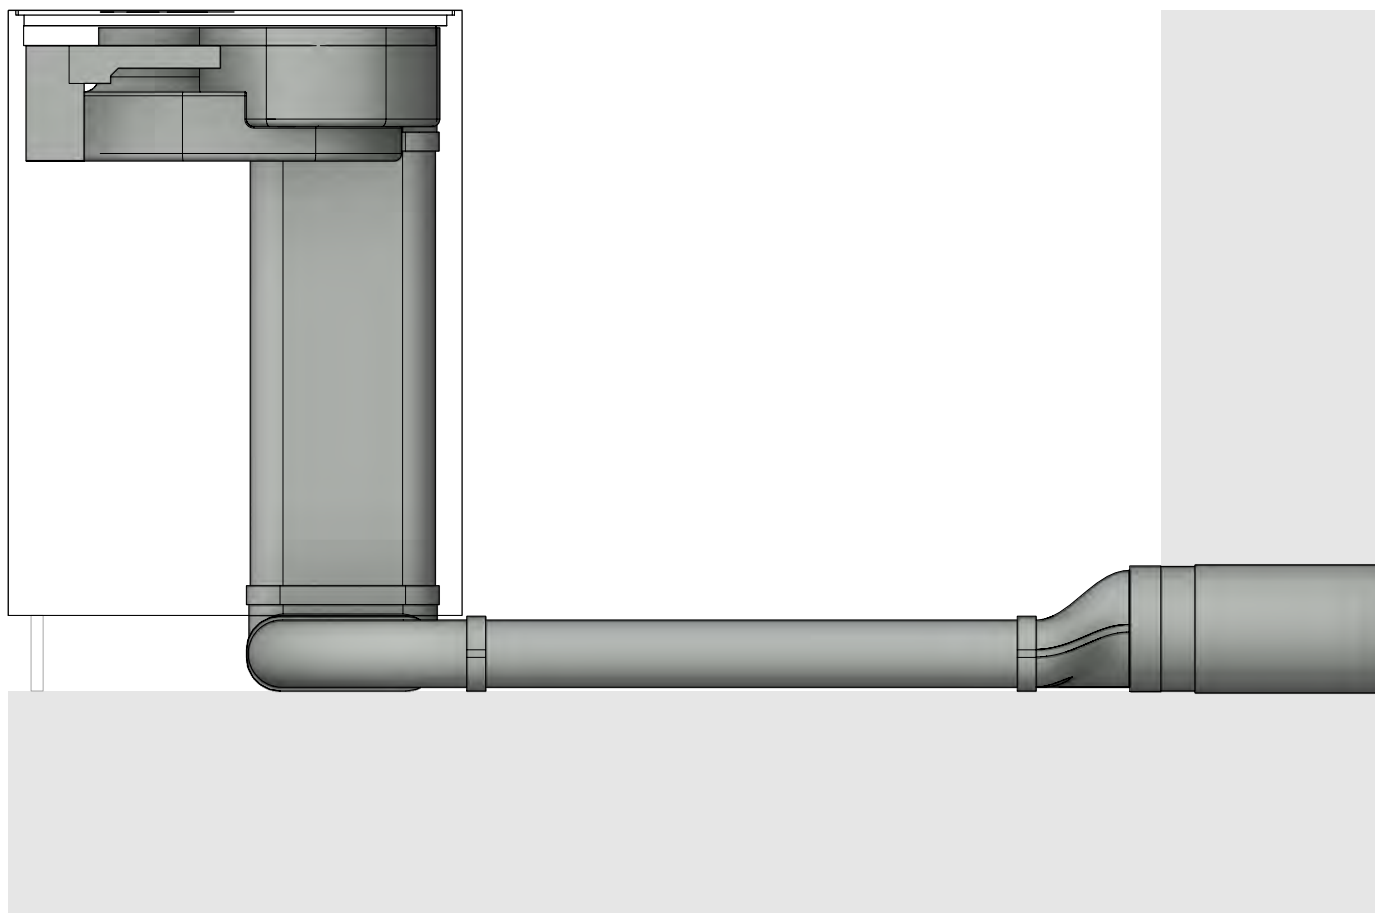


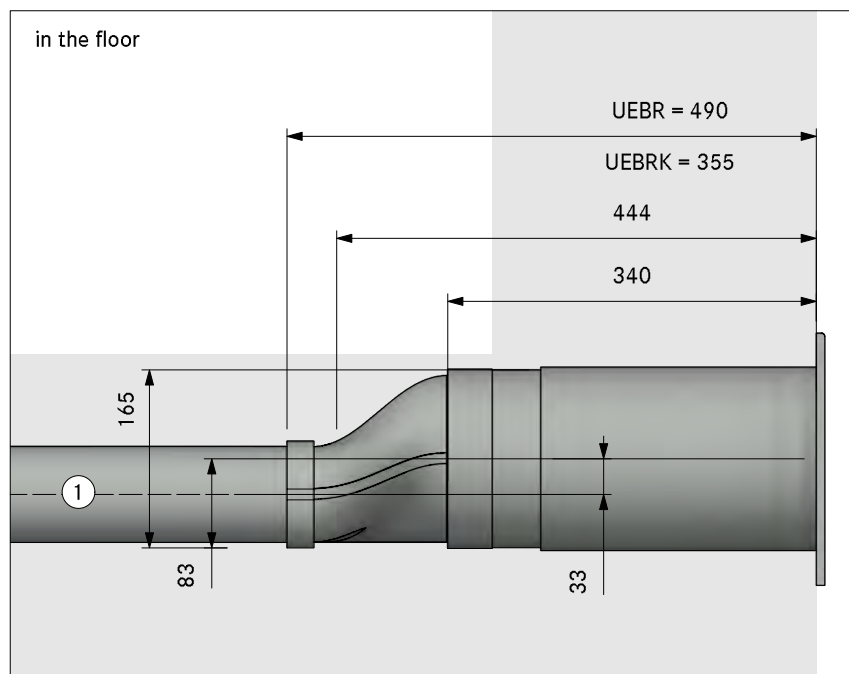

in the plinth area

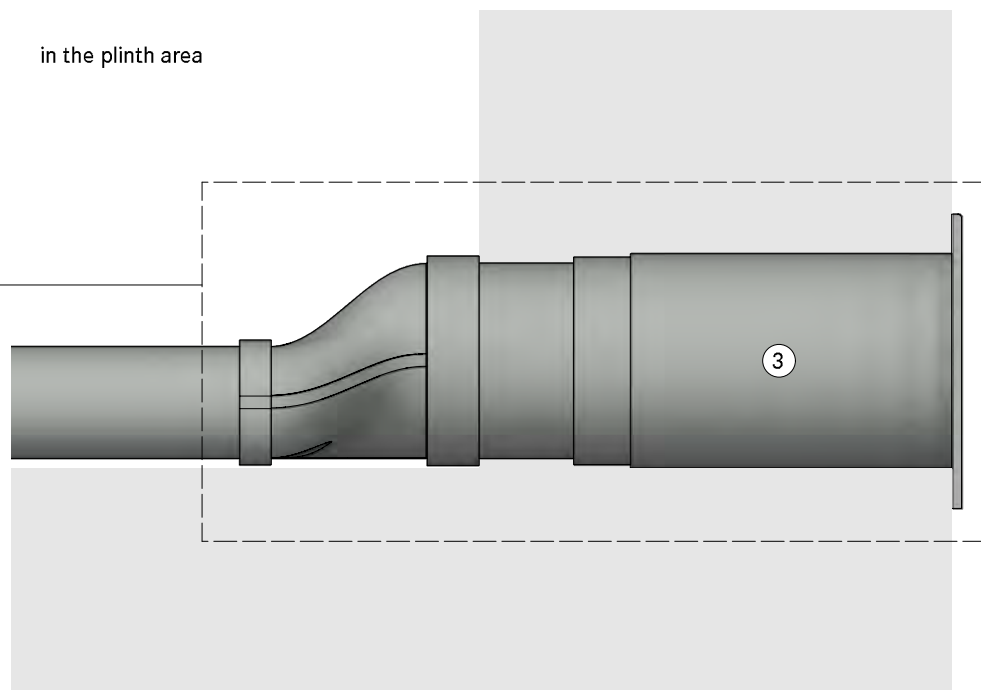


1. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
2. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

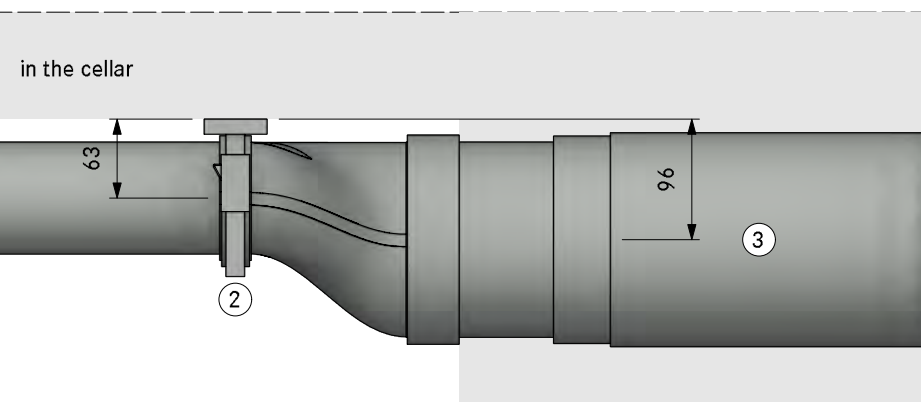



Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
1	EFBH90	90° bend flat horizontal
4	EFBV90	90° bend flat vertical
1	EFV	duct connection flat
1	UEBF	3box wall sleeve
3	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

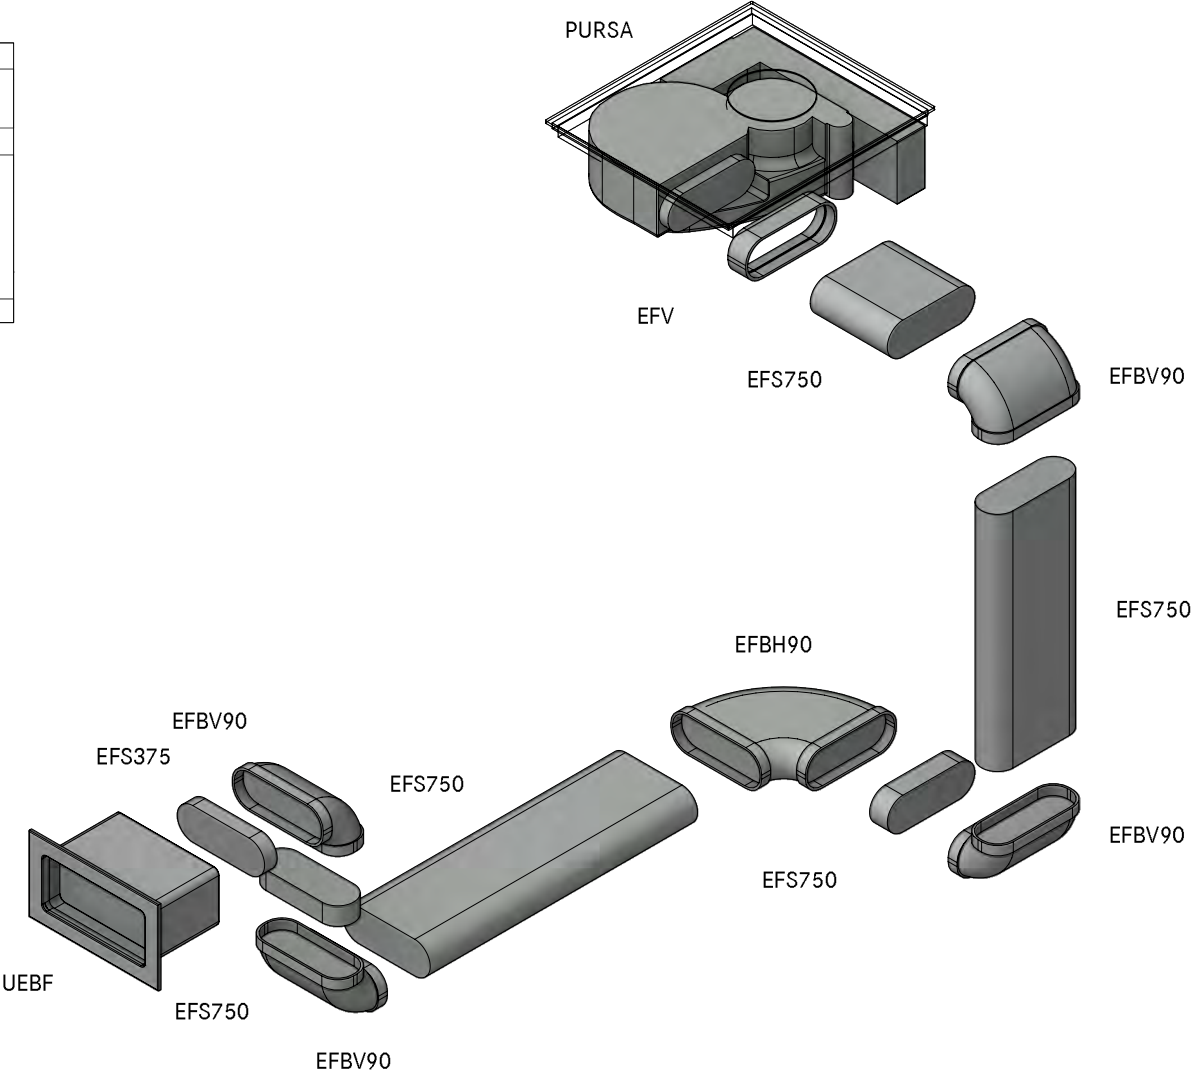




MODELPLAN  
 REFERENCE NUMBER  
 COMPOSITION  
 LAYOUT

SPA20230  
 SPure Plinth right  
 GR

Version, 1.0

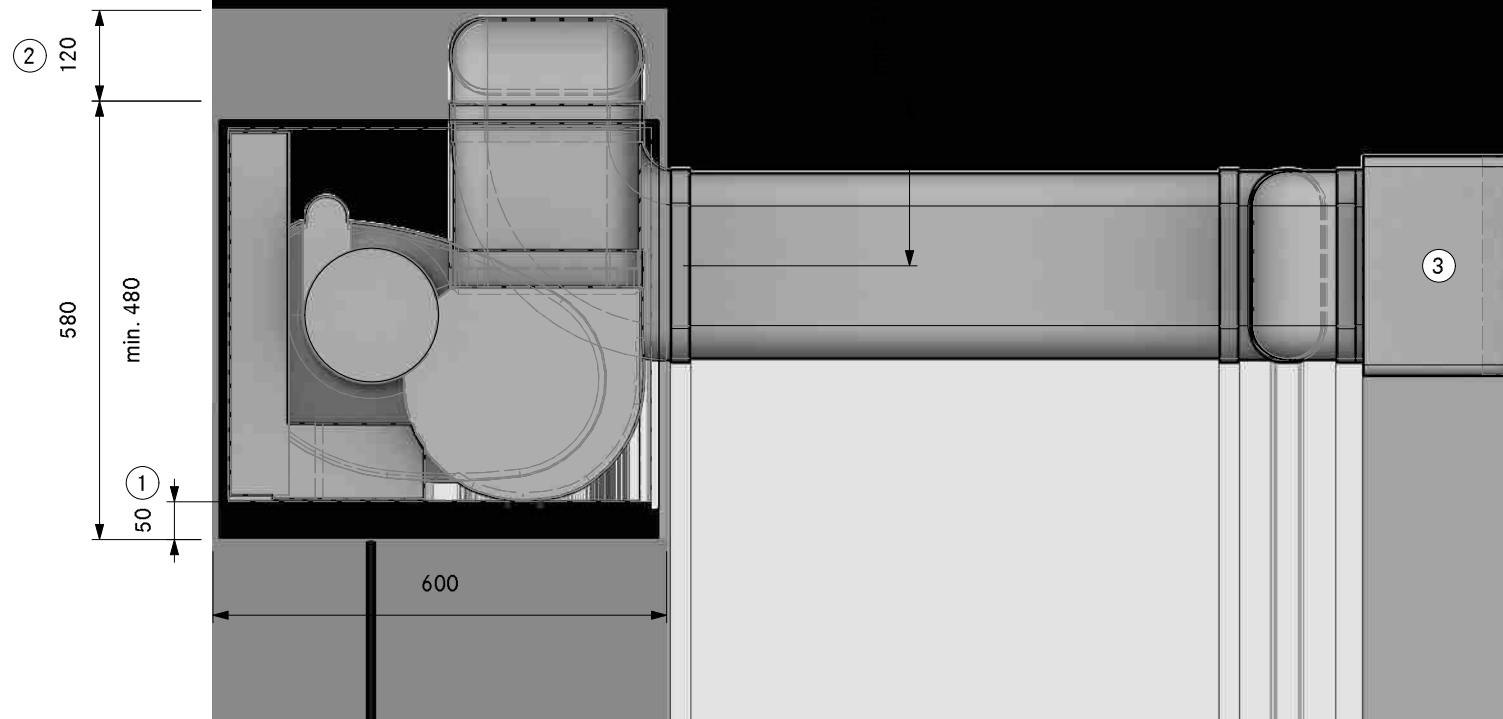

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.

2. Min. space required

3. Hole size 310 x 155mm  
 Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA20230  
SPure Plinth right swan neck UEBF

LAYOUT

SA

Version, 1.0

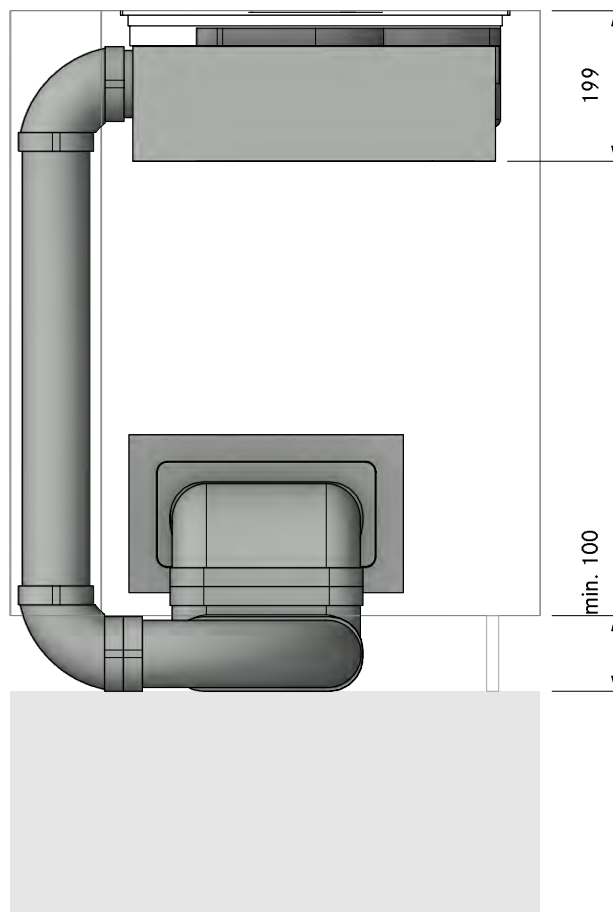


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA20230  
SPure Plinth right swan neck UEBF

LAYOUT

FA

Version, 1.0

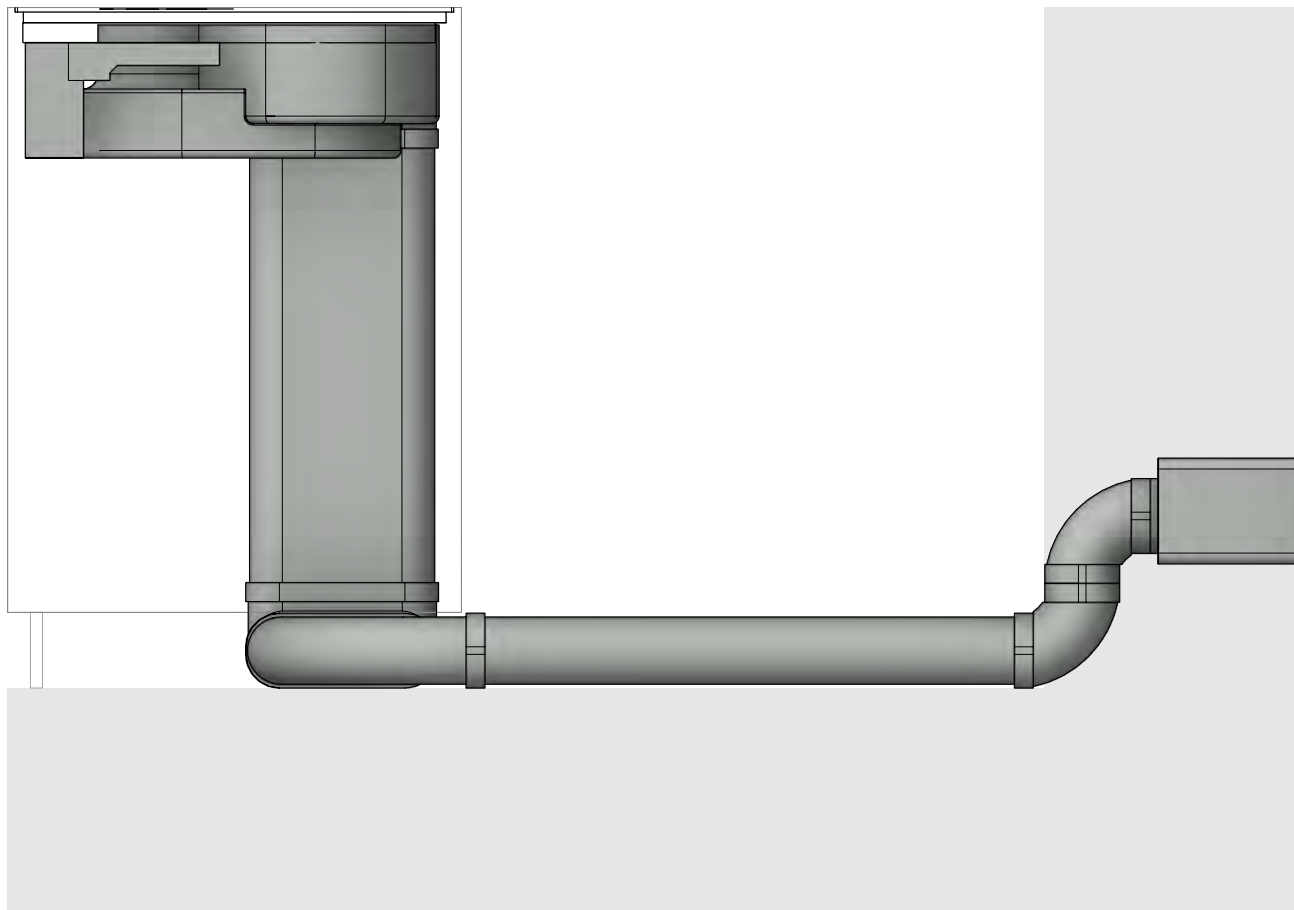

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


SPA20230  
SPure Plinth right swan neck UEBF

Version, 1.0



LAYOUT


Detail

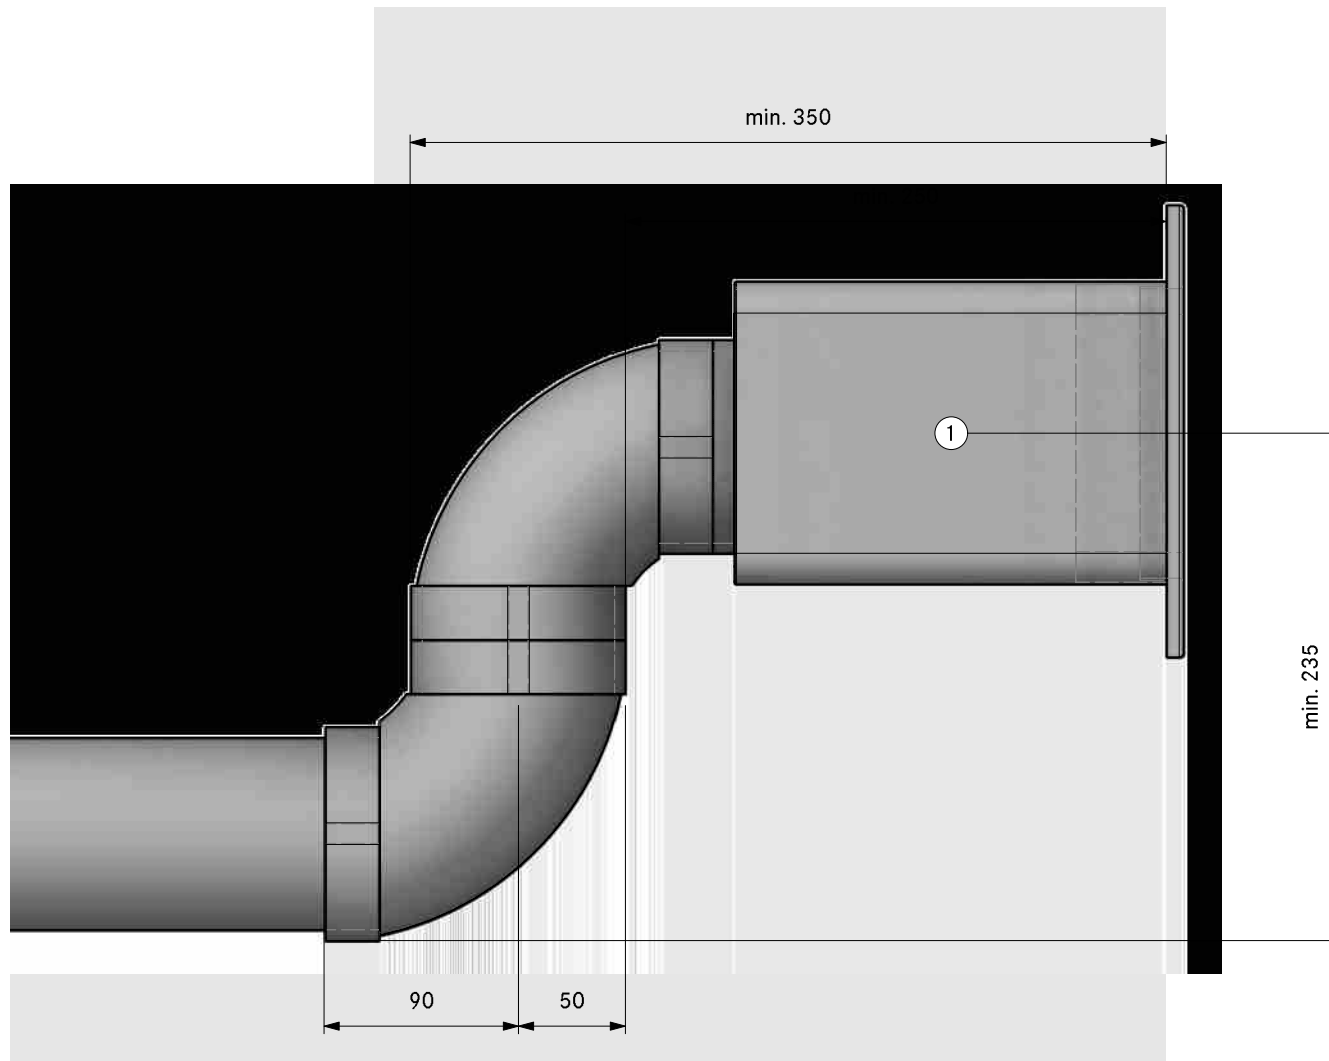


- ①. Hole size 310 x 155mm  
Wall vent must be able to fully  
open for air to extract



Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
1	EFBH90	90° bend flat horizontal
3	EFBV90	90° bend flat vertical
1	EFR90	transition flat round 90°
1	EFV	duct connection flat
1	ERV	duct connection round
1	UEBR	3box wall sleeve round
3	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

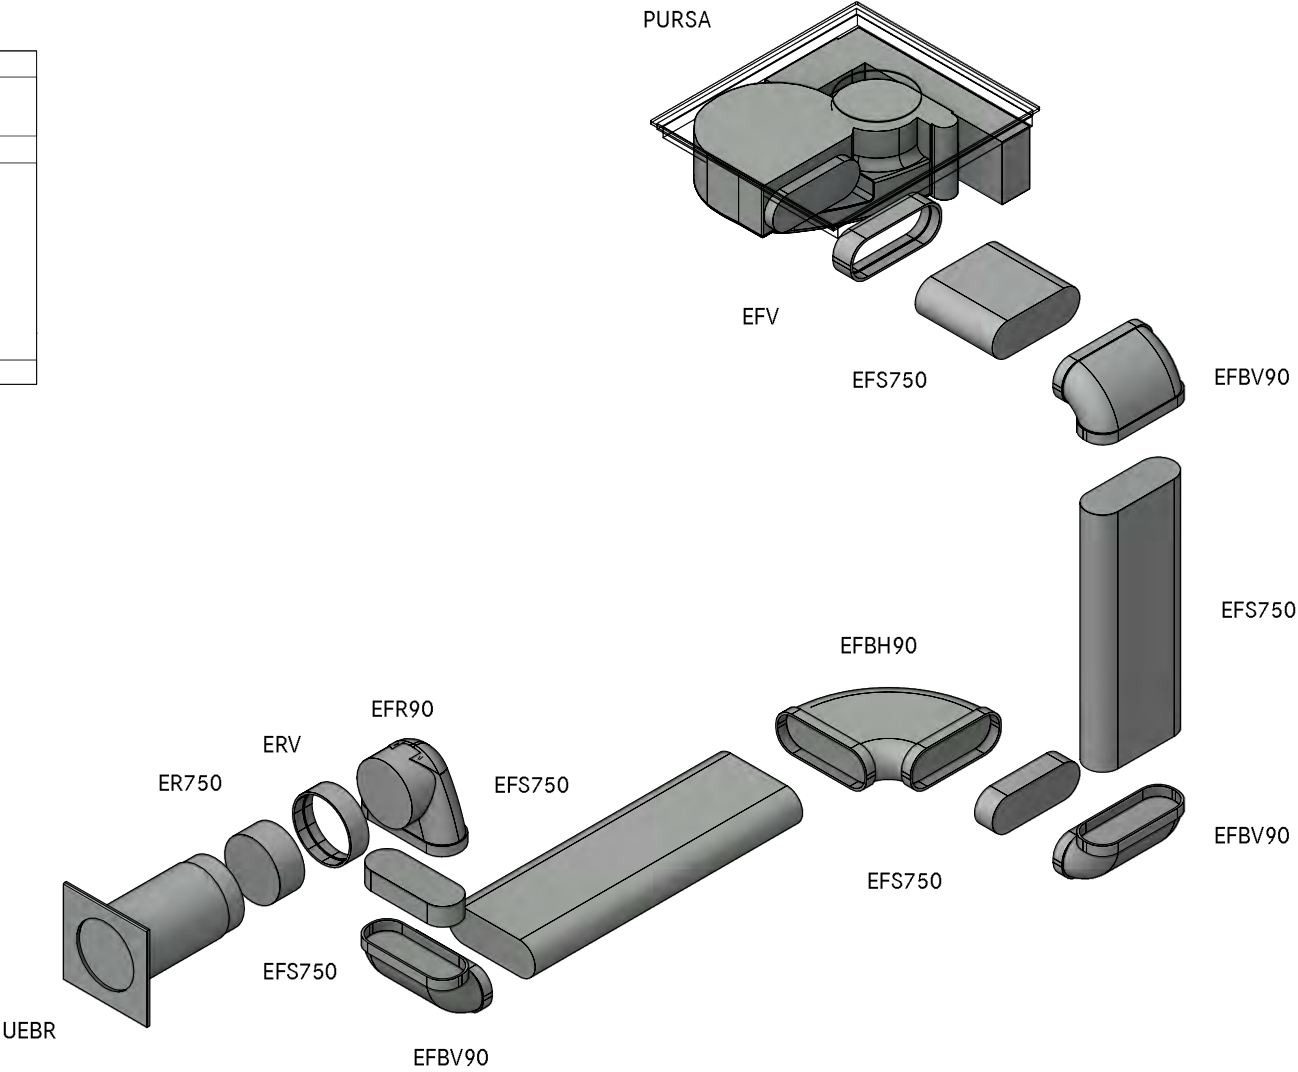

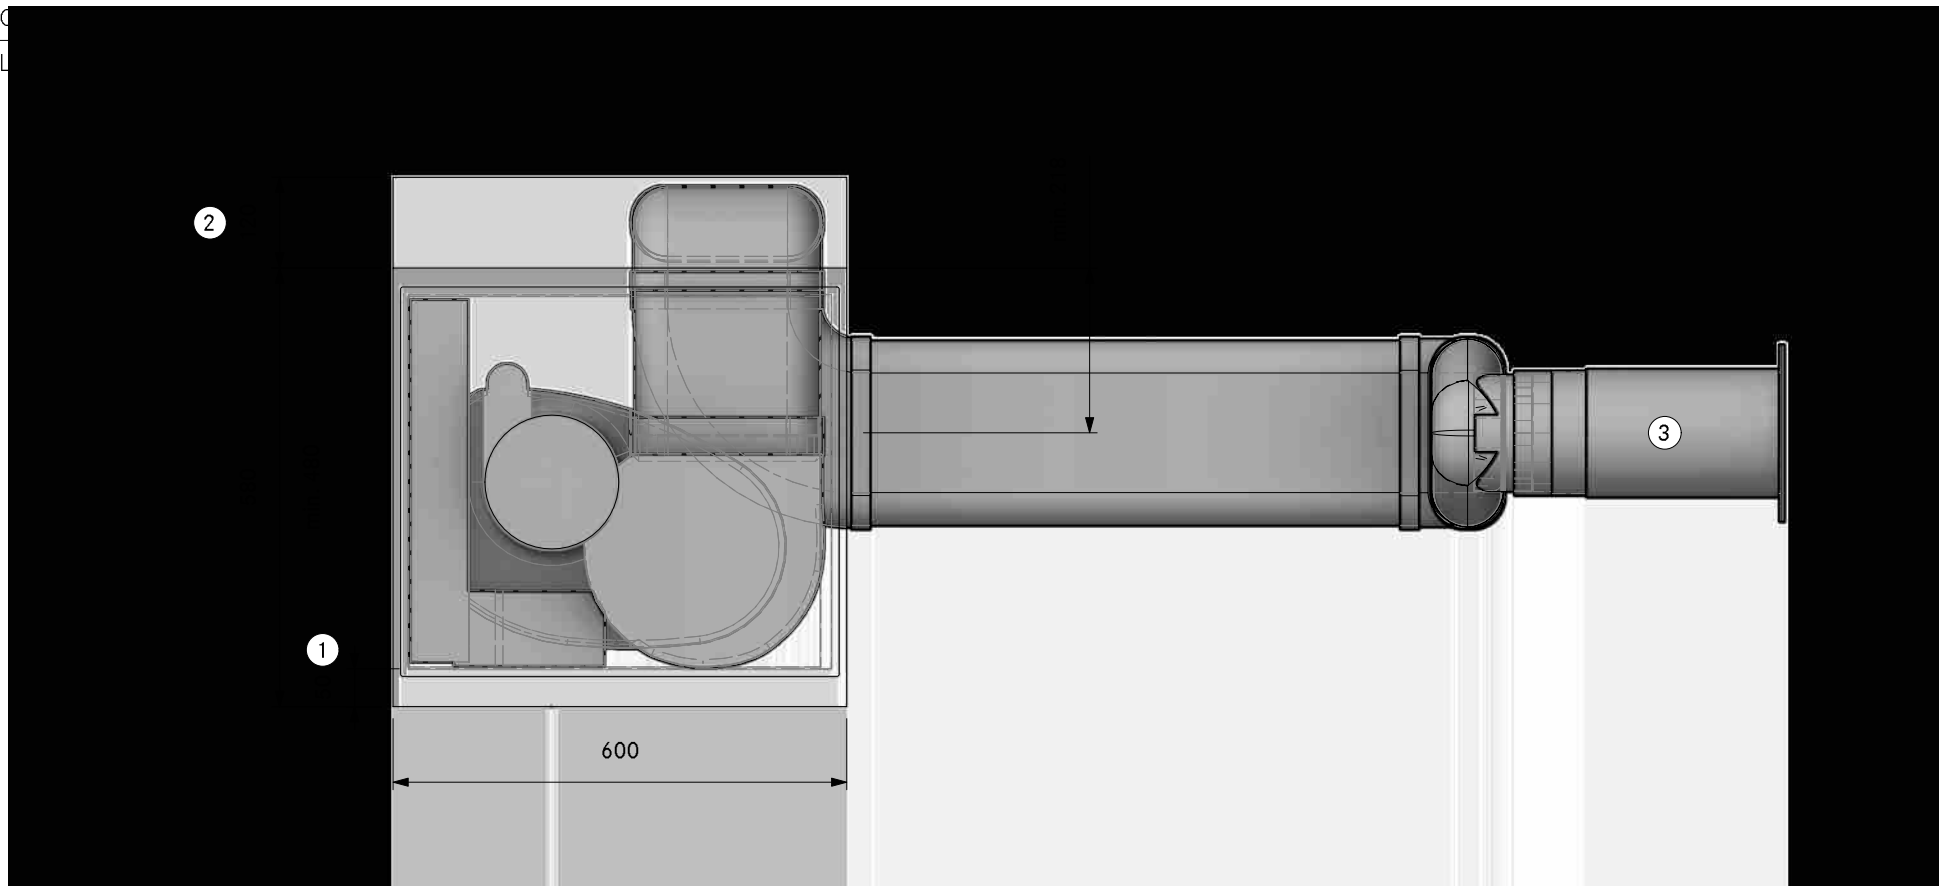

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
2. Min. space required
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA20240**  
**SPure Plinth right swan neck UEBR**

LAYOUT

**SA**

Version, 1.0

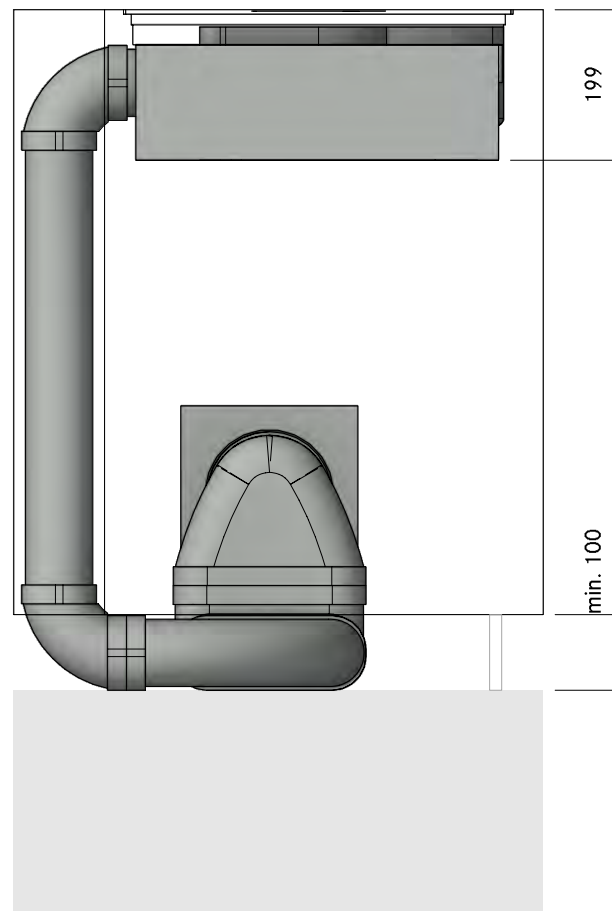



MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


**SPA20240**  
**SPure Plinth right swan neck UEBR**

Version, 1.0



LAYOUT

FA

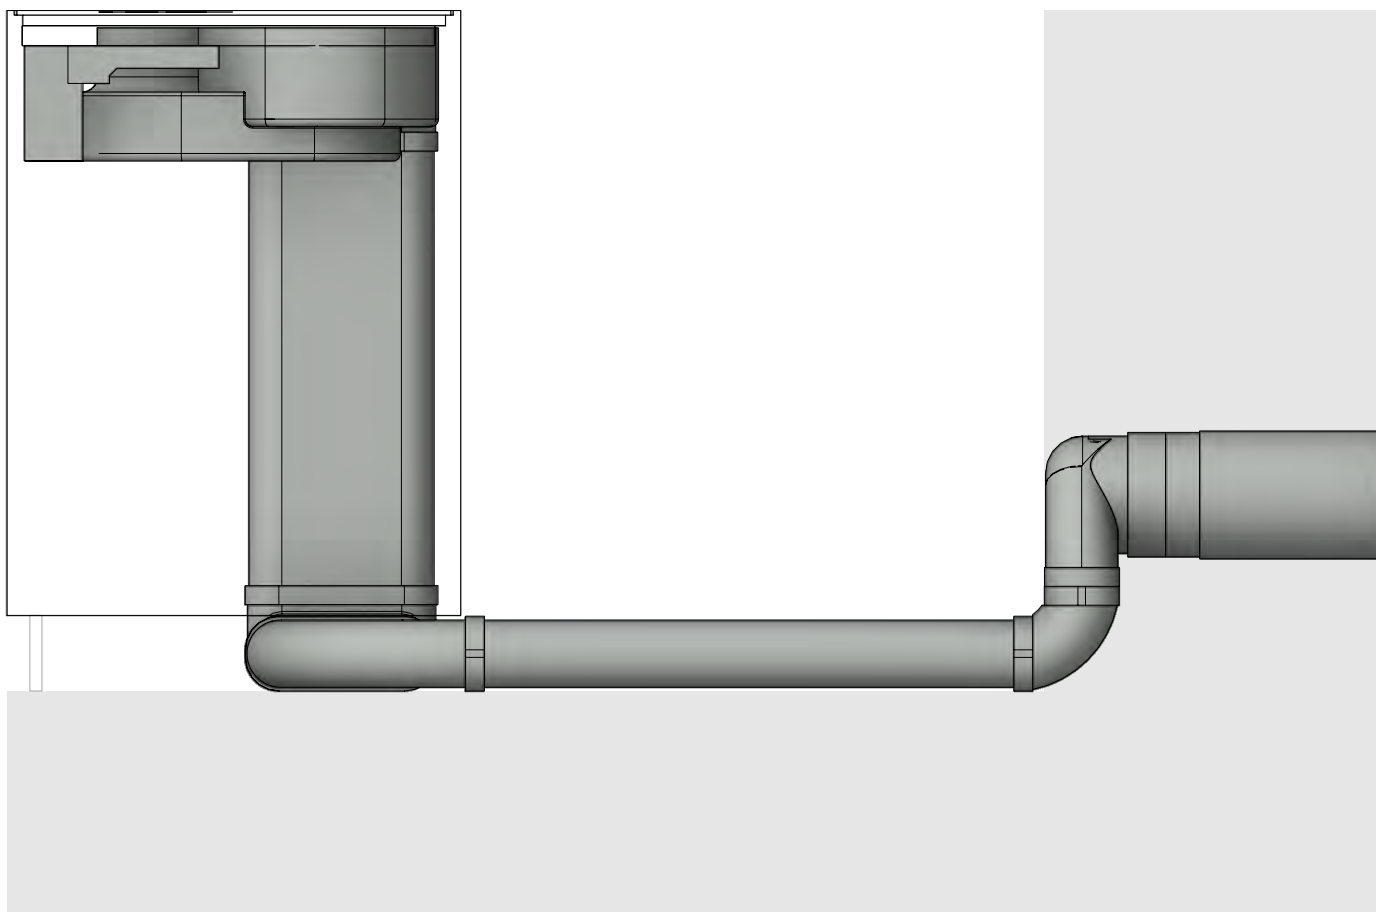


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA20240  
SPure Plinth right swan neck UEBR

LAYOUT

Detail


Version, 1.0

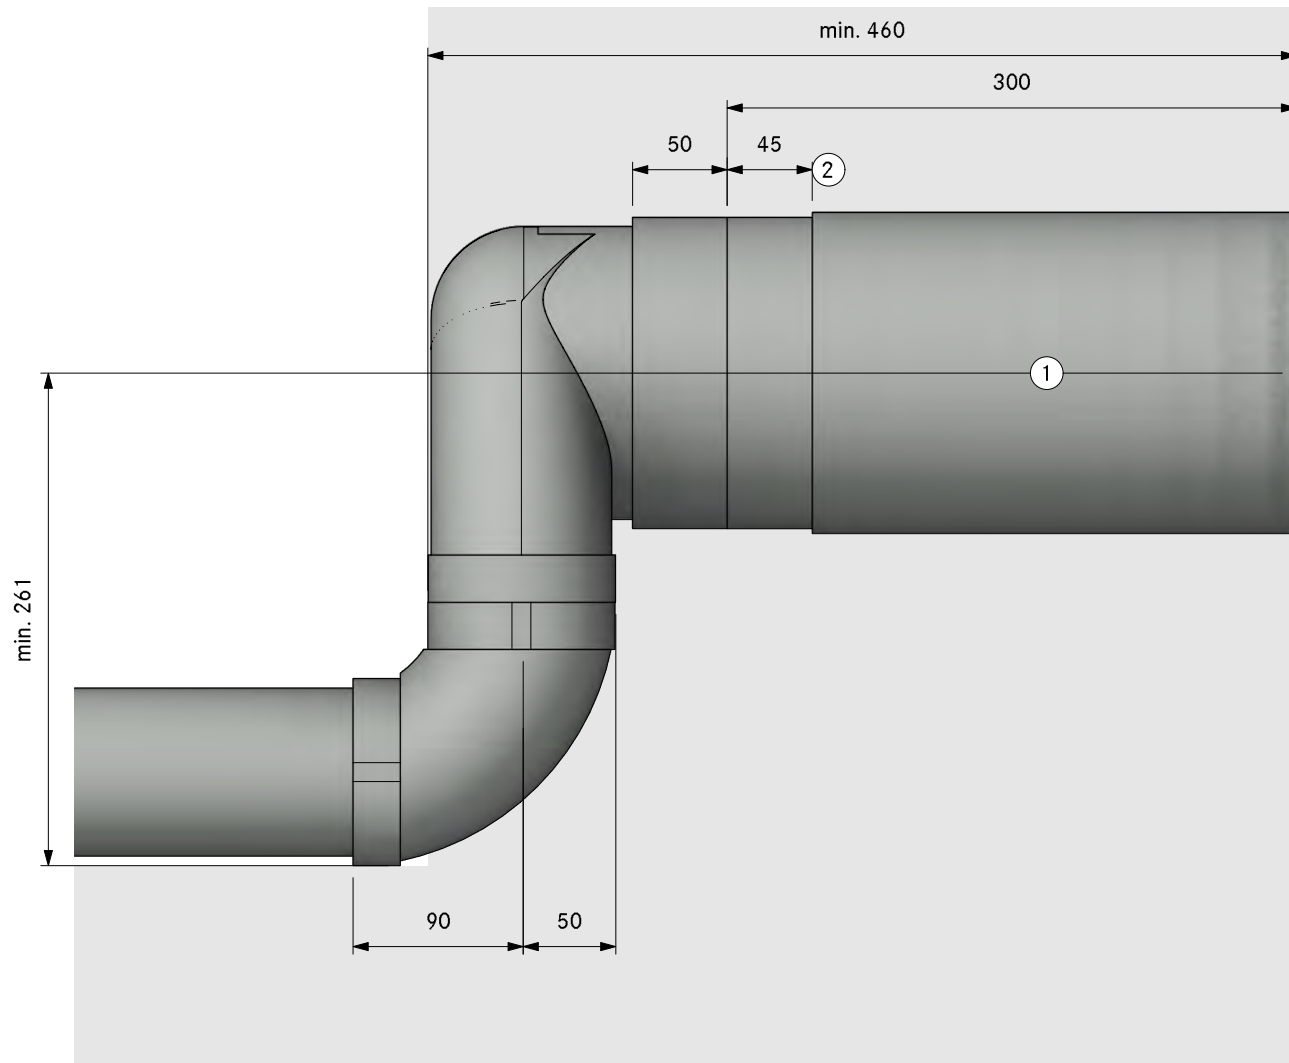

- ①. Hole size min. Ø180mm.  
Wall vent must be able to fully  
open for air to extract
- ②. Bushing length 45mm (can be  
shortened by 20mm)




Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
1	EFBH90	90° bend flat horizontal
2	EFBV90	90° bend flat vertical
2	EFV	duct connection flat
1	UEBF	3box wall sleeve
3	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

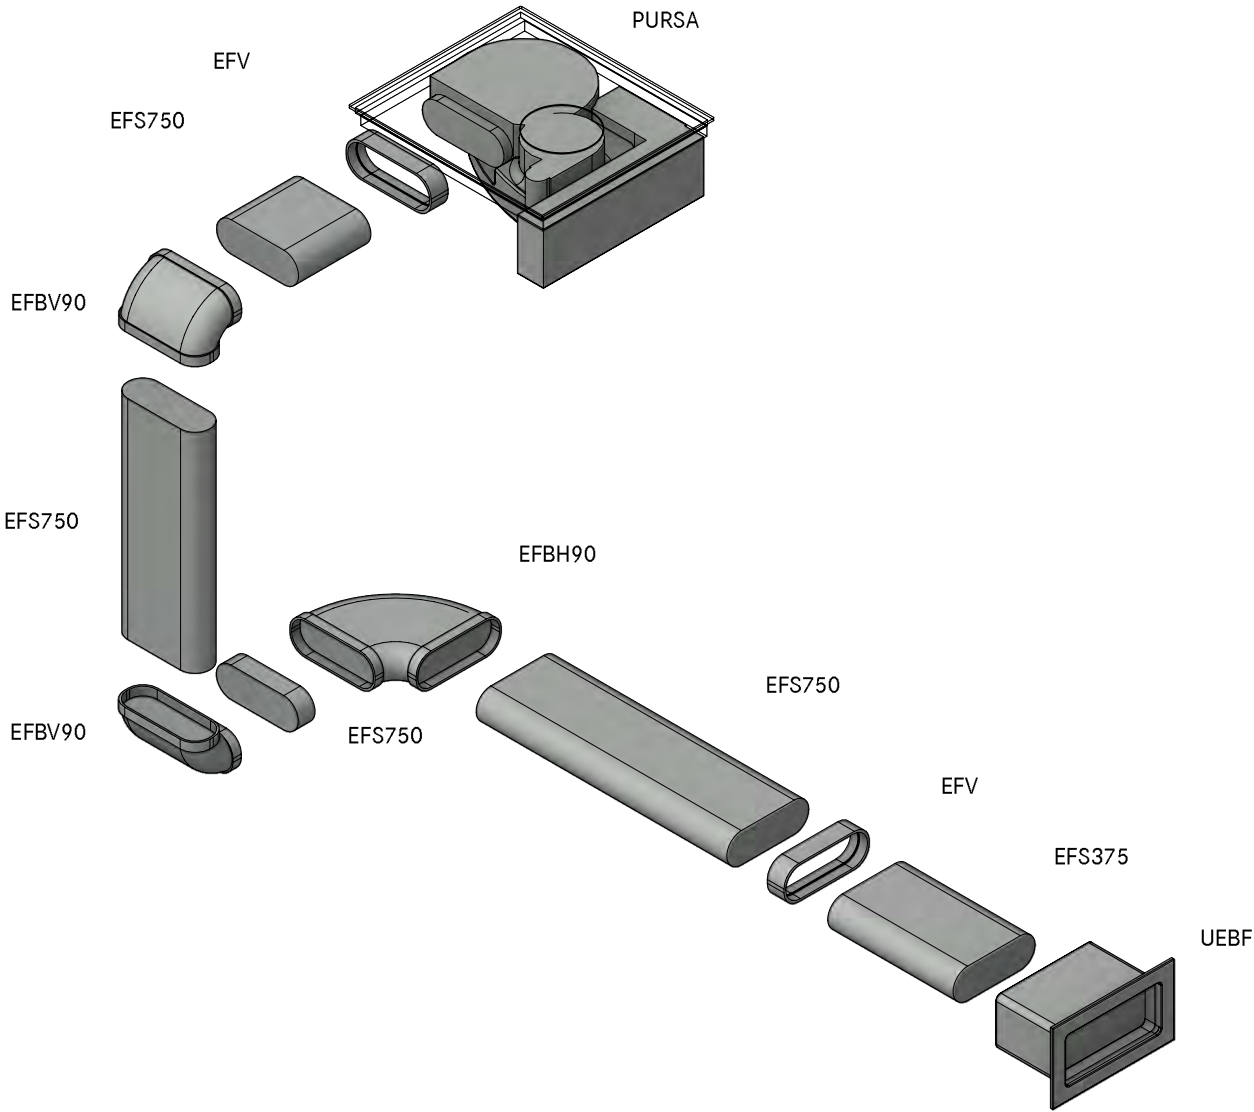

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

SPA204 10  
SPu  
GR

Version, 1.0

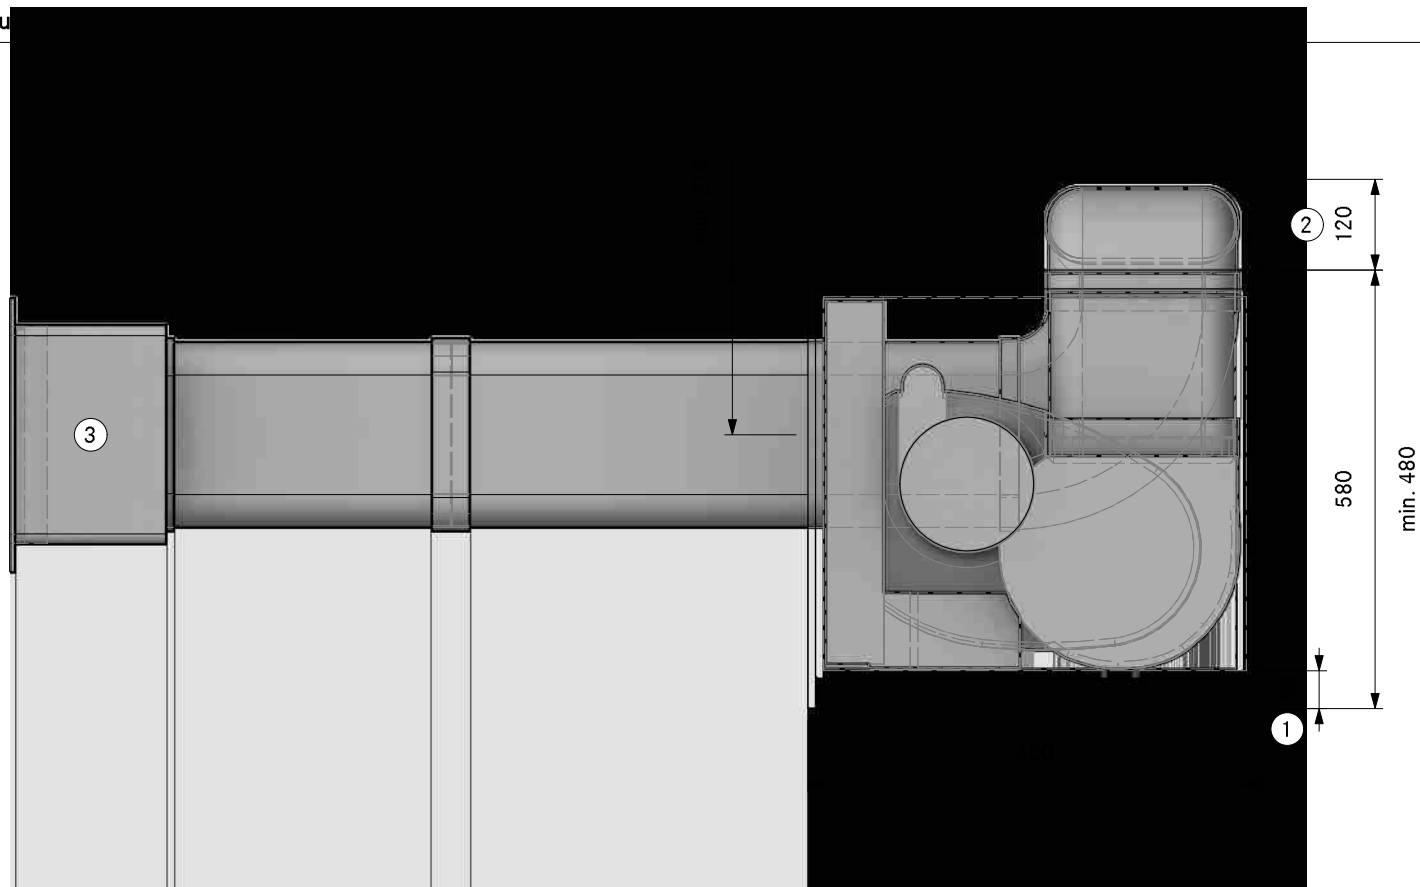

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.

2. Min. space required

3. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA20410**  
**SPure Plinth left UEBF**

LAYOUT

**SA**

Version, 1.0

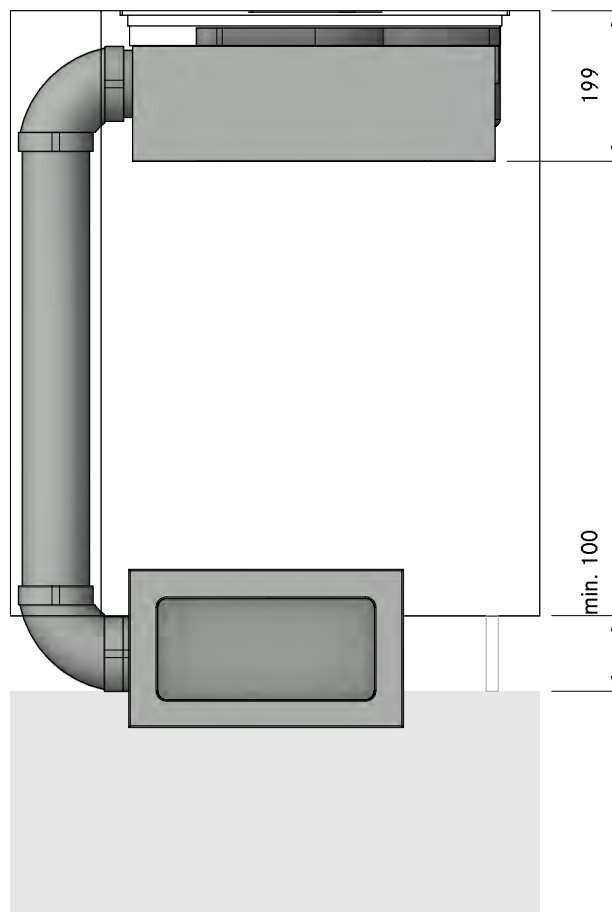


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA20410**  
**SPure Plinth left UEBF**

LAYOUT

**FA**

Version, 1.0

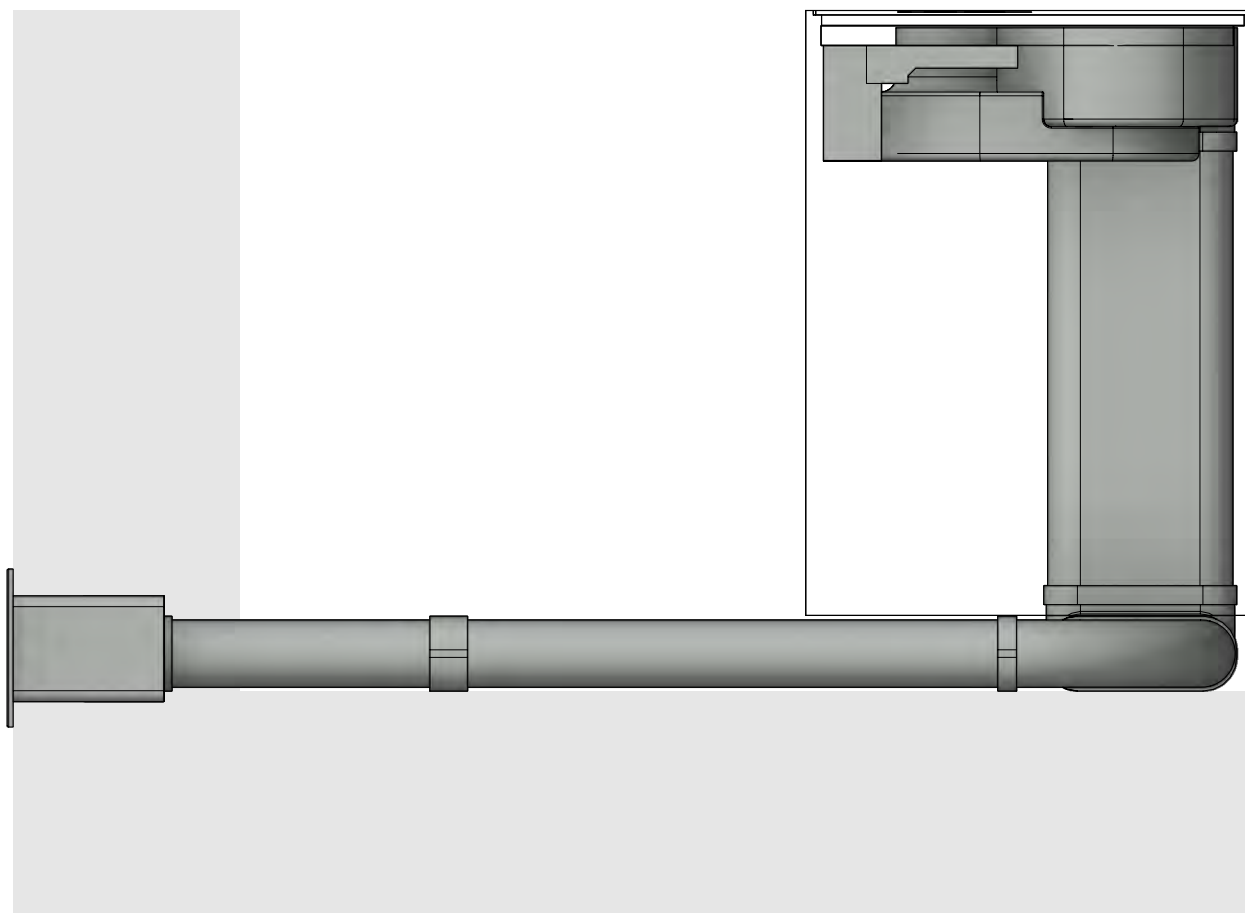


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA20410  
SPure Plinth left UEBF

LAYOUT

Detail


Version, 1.0

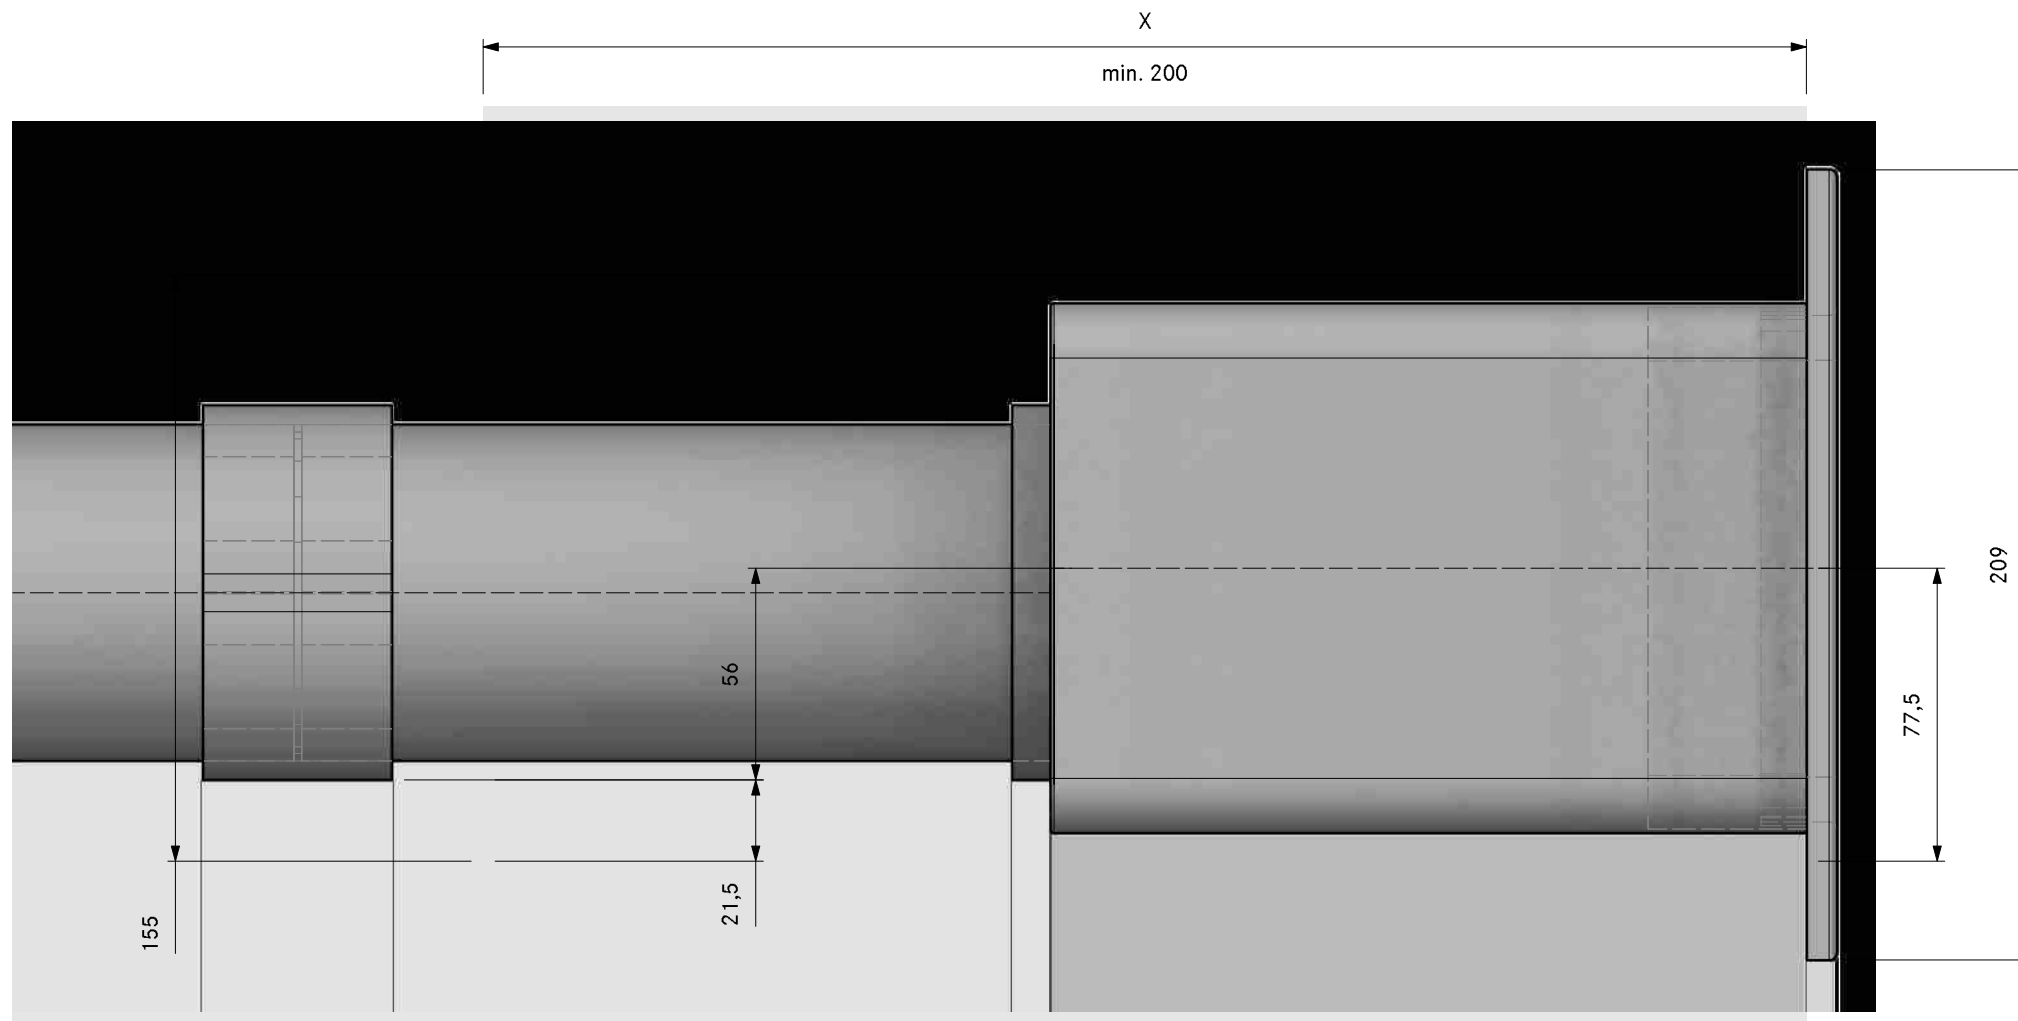






Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
1	EFBH90	90° bend flat horizontal
2	EFBV90	90° bend flat vertical
1	EFRG	bridge flat round straight
1	EFV	duct connection flat
1	UEBR	3box wall sleeve round
1	ER750	round duct 750mm
3	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

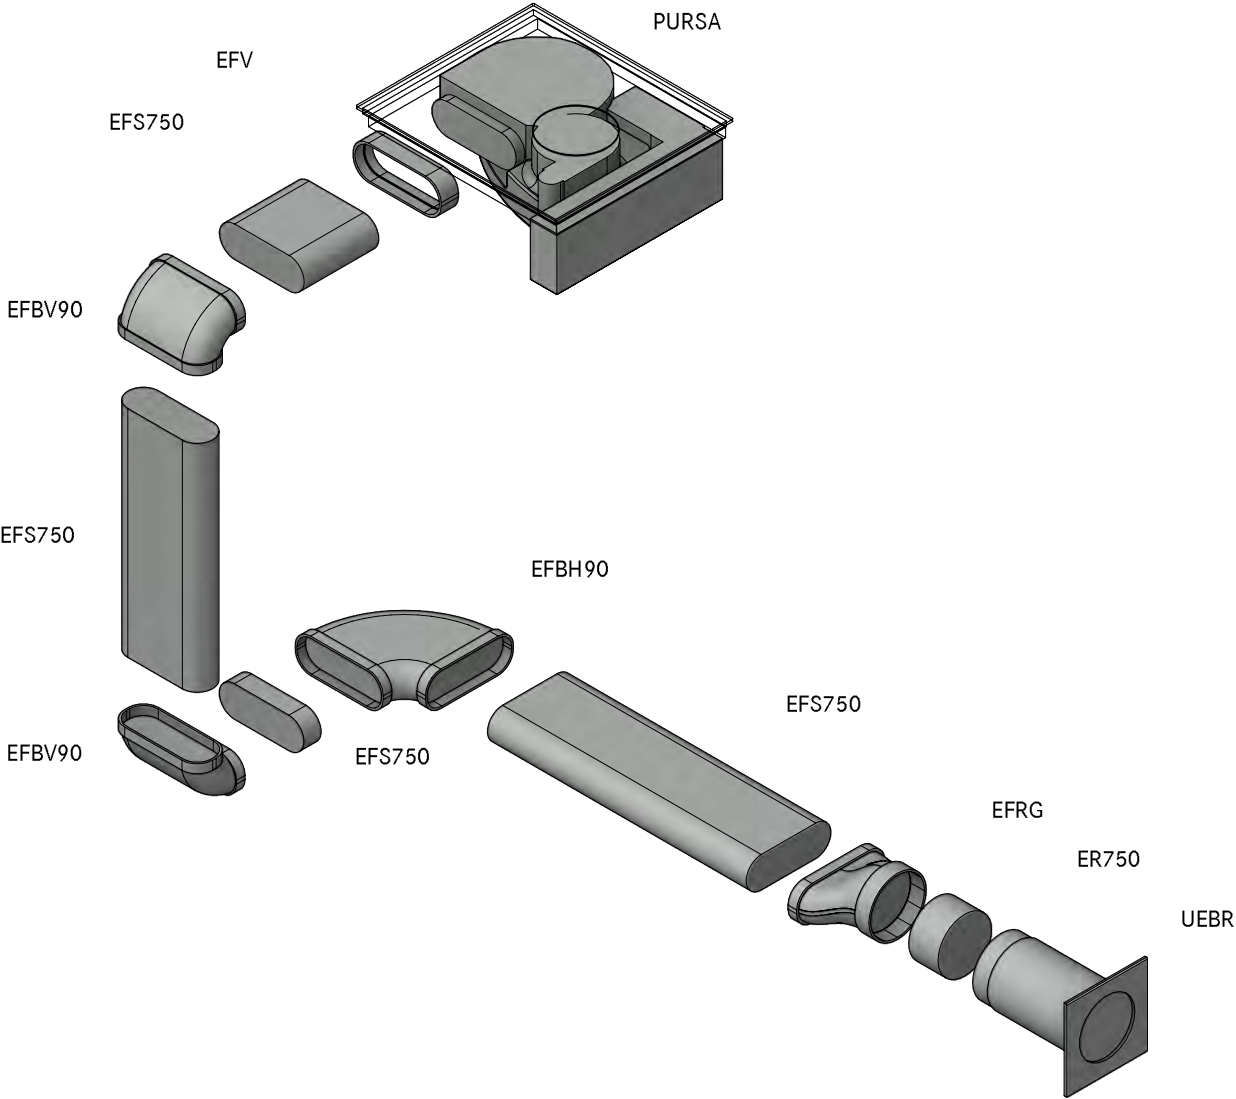

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

SPA20420  
SPure  
GR

Version, 1.0

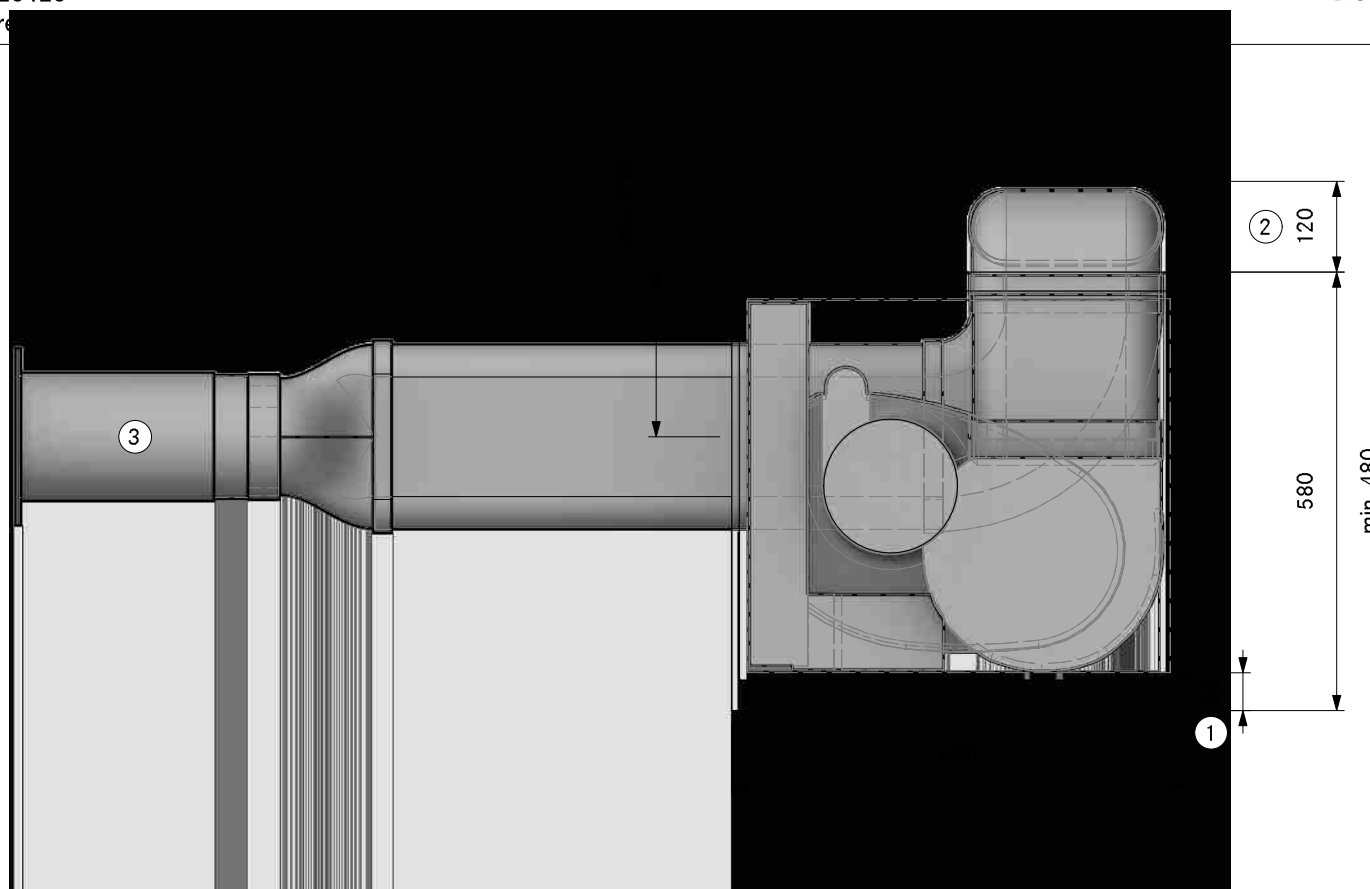

①. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.


②. Min. space required

③. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

SPA20420  
SPure Plinth left UEBR  
SA

Version, 1.0

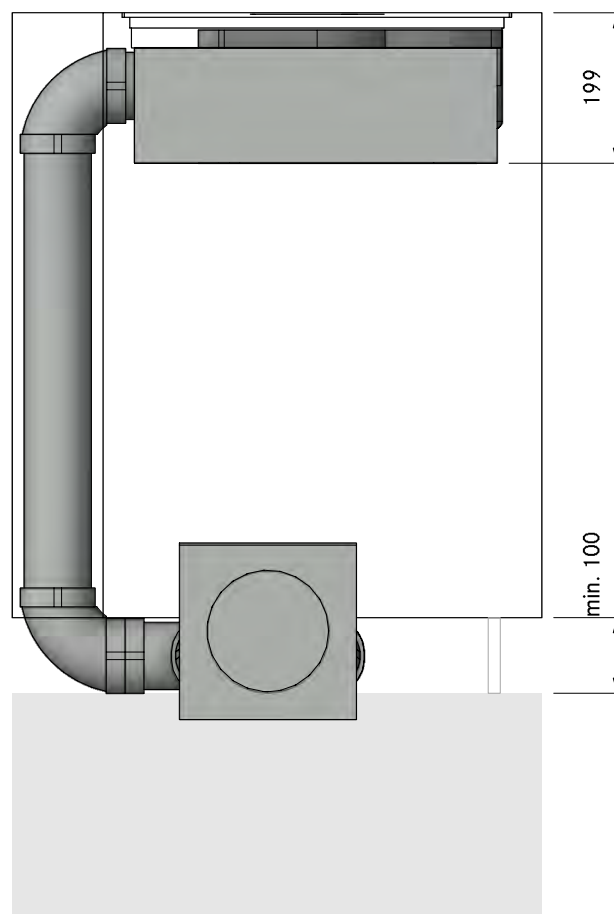


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


SPA20420  
SPure Plinth left UEBR

LAYOUT


FA

Version, 1.0

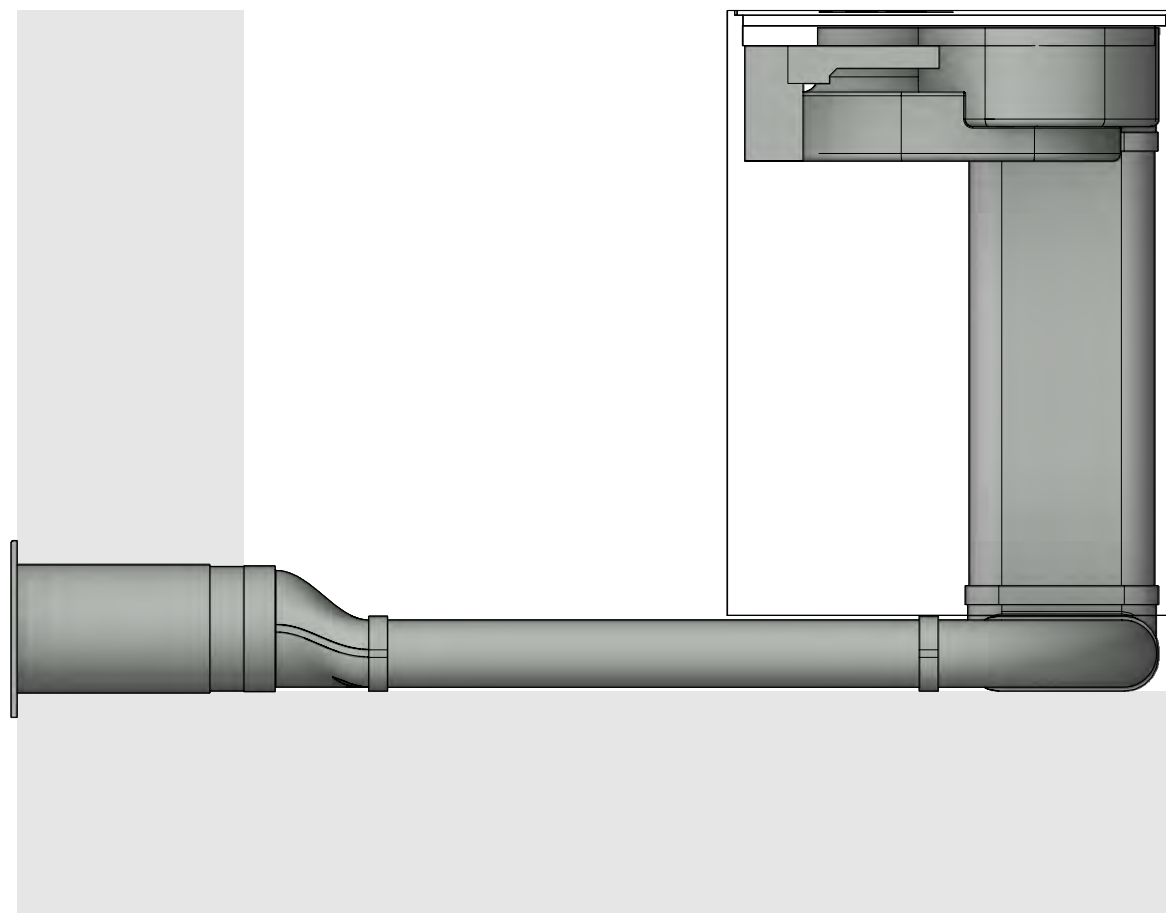


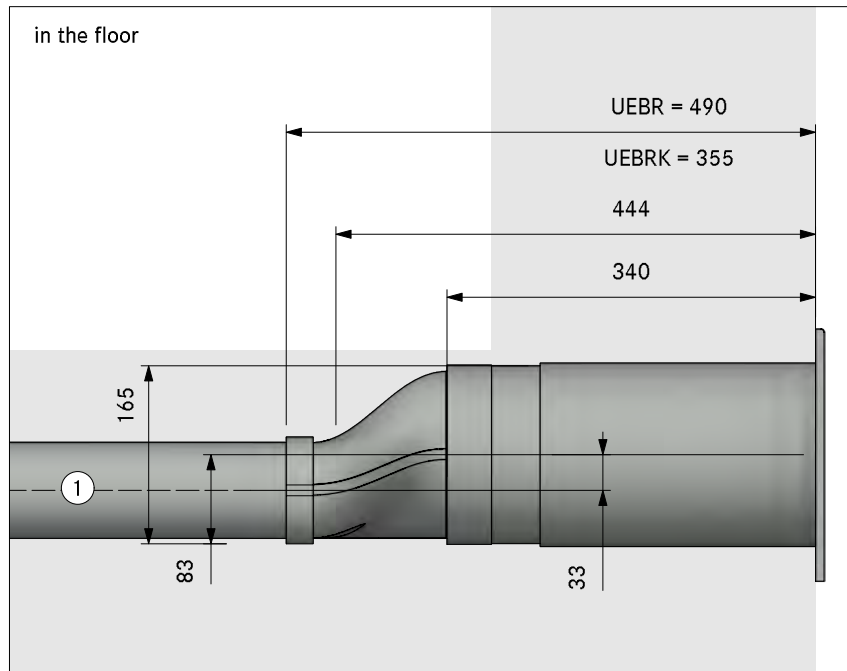

in the plinth area

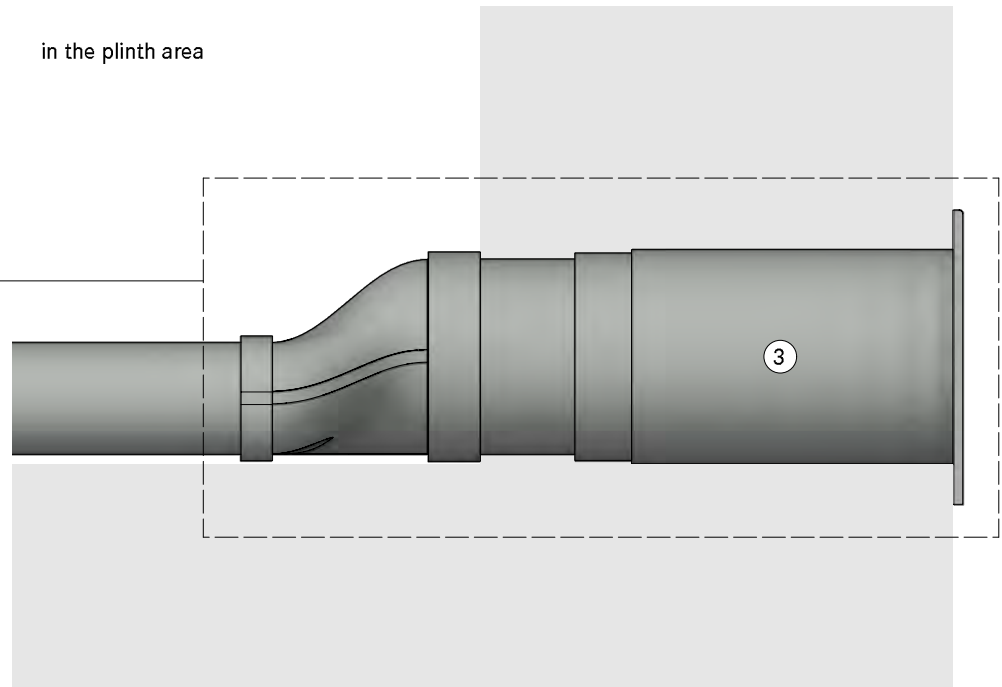


in the cellar

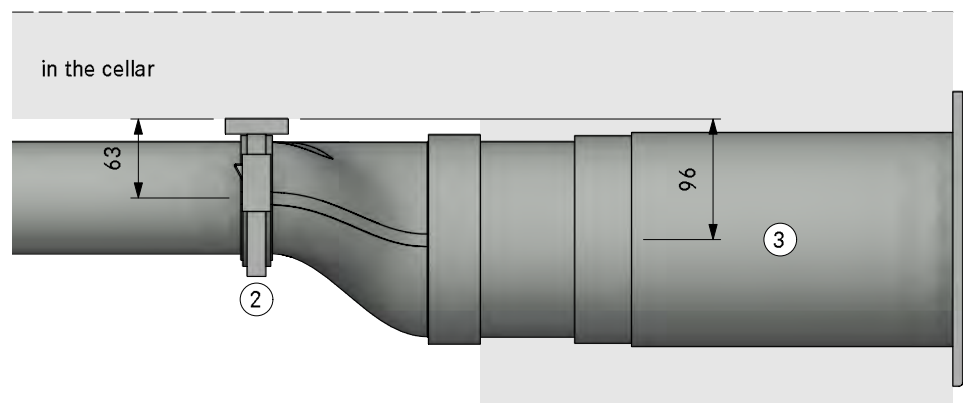

1. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
2. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract




Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
1	EFBH90	90° bend flat horizontal
4	EFBV90	90° bend flat vertical
1	EFV	duct connection flat
1	UEBF	3box wall sleeve
3	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

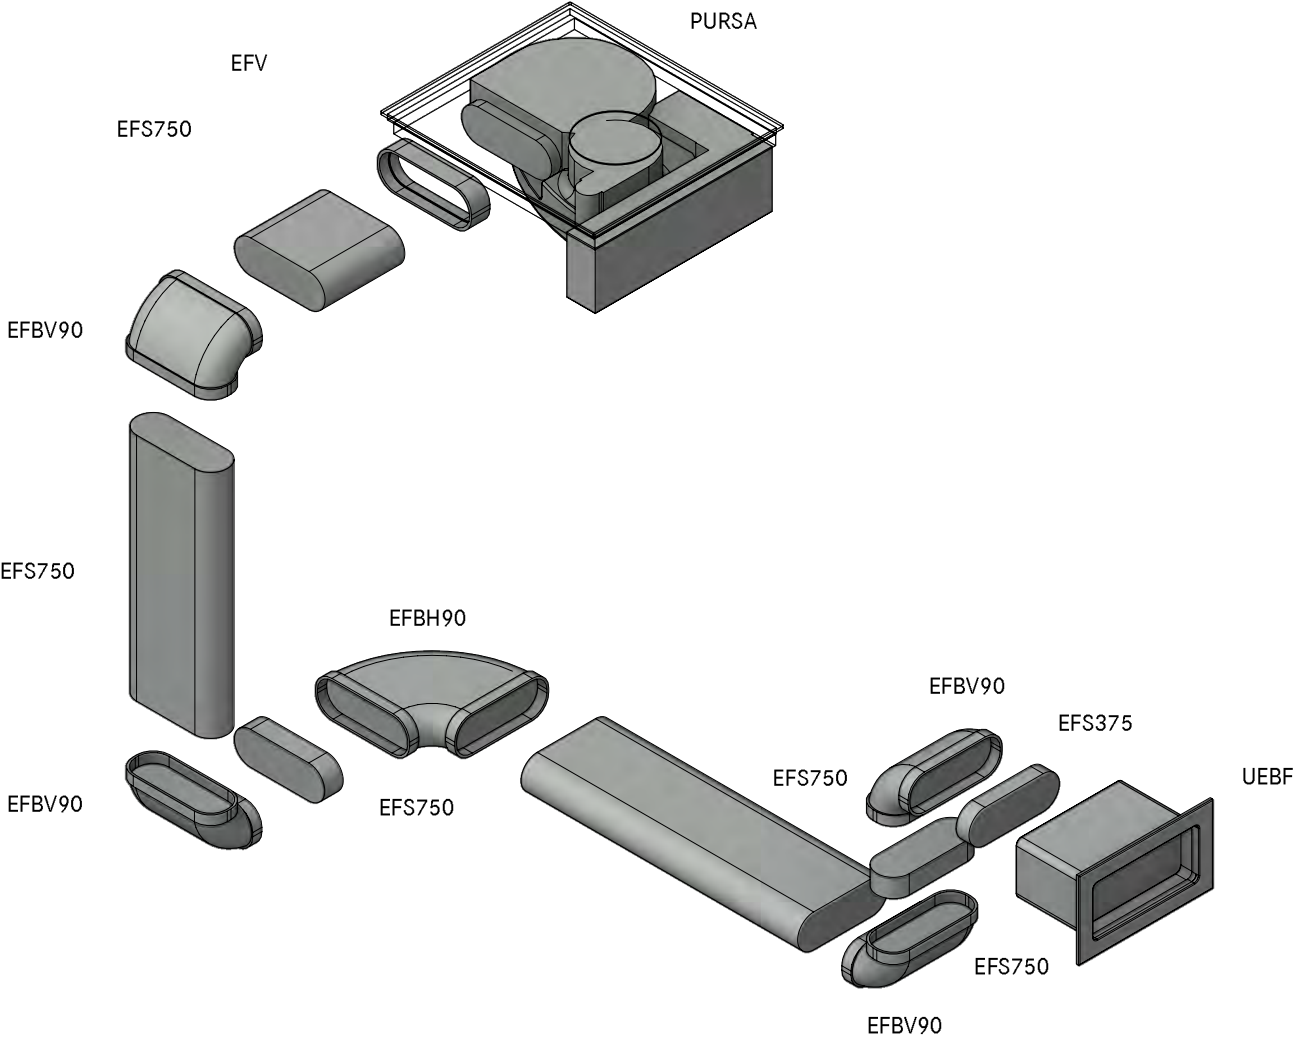



MODELPLAN	
REFERENCE NUMBER	SPA20430
COMPOSITION	SPure Plint
LAYOUT	GR

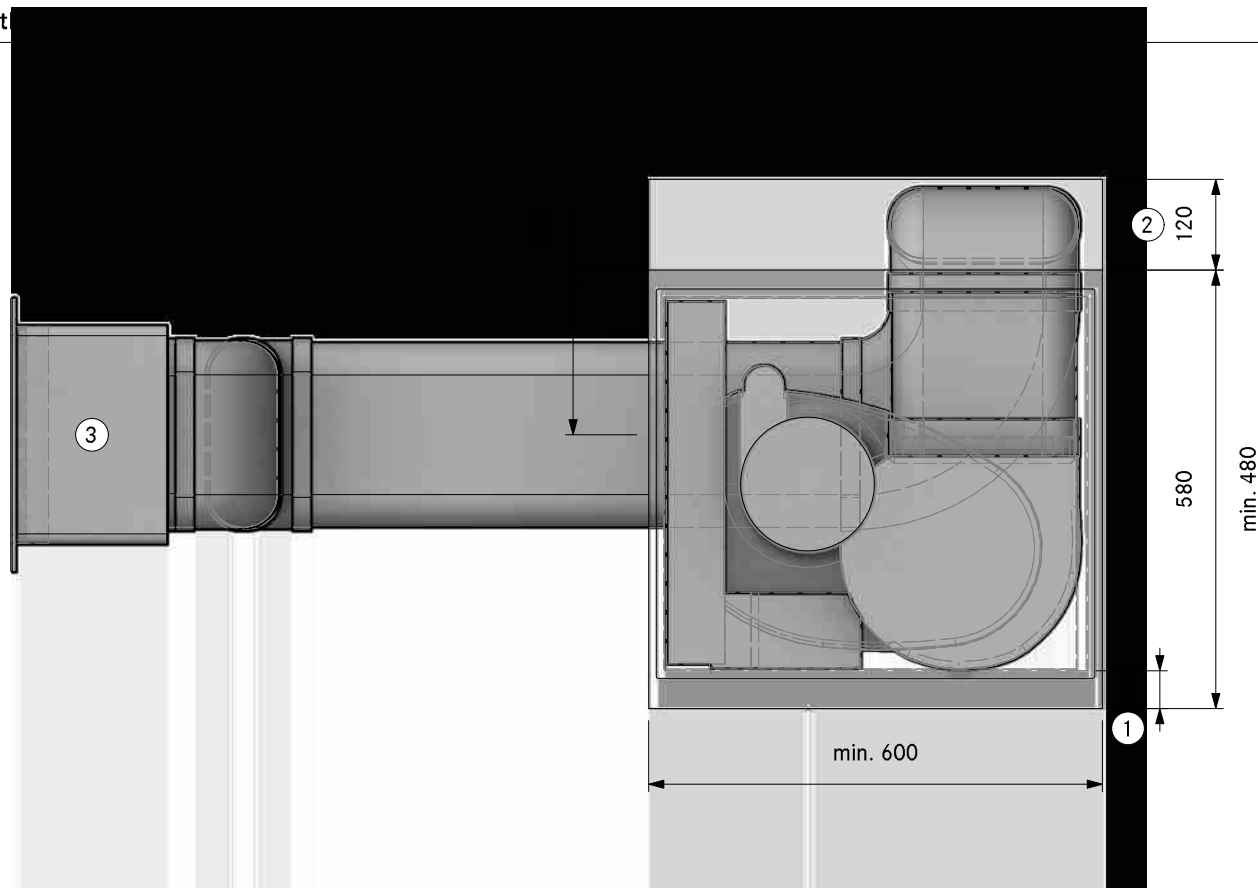

- ①. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- ②. Min. space required
- ③. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA20430**  
**SPure Plinth left swan neck UEBF**

LAYOUT

**SA**

Version, 1.0

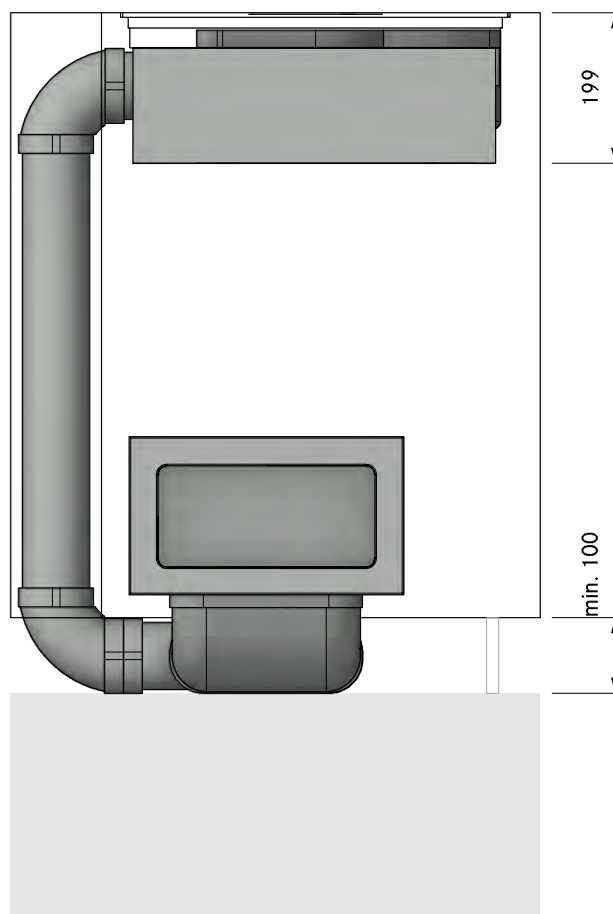


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA20430  
SPure Plinth left swan neck UEBF

LAYOUT

FA

Version, 1.0

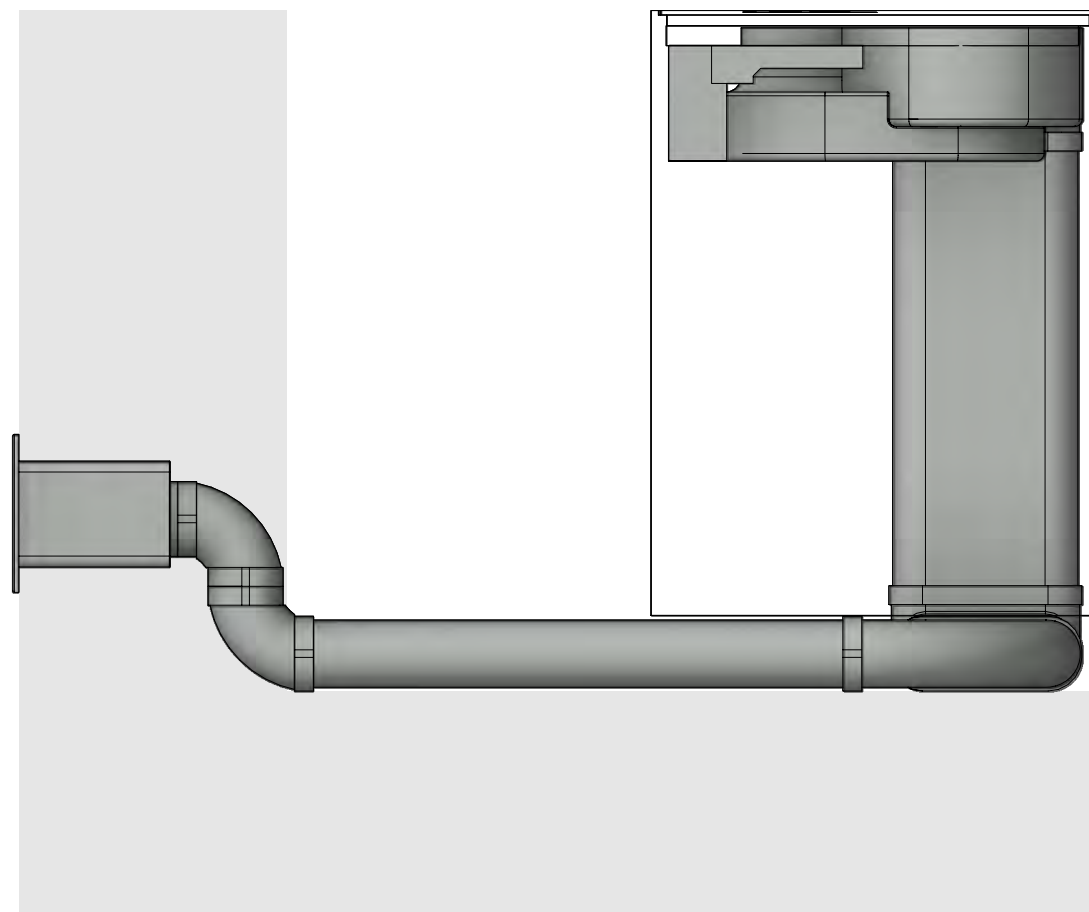

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


SPA20430  
SPure Plinth left swan neck UEBF

Version, 1.0



LAYOUT


Detail

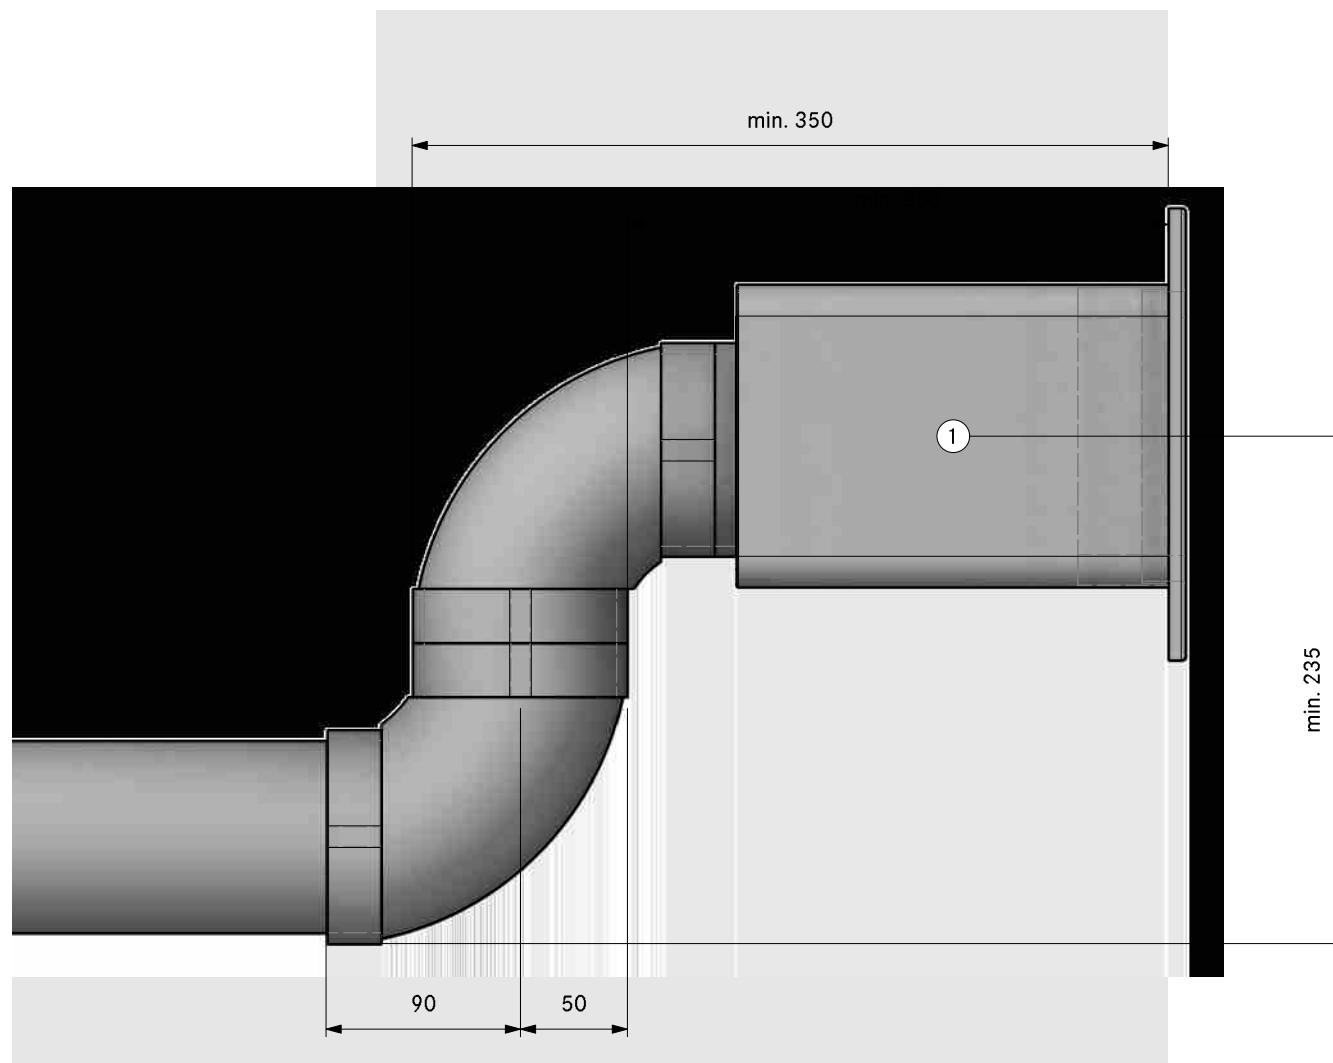

- ①. Hole size 310 x 155mm  
Wall vent must be able to fully  
open for air to extract



Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
1	EFBH90	90° bend flat horizontal
3	EFBV90	90° bend flat vertical
1	EFR90	transition flat round 90°
1	EFV	duct connection flat
1	ERV	duct connection round
1	UEBR	3box wall sleeve round
1	ER750	round duct 750mm
3	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

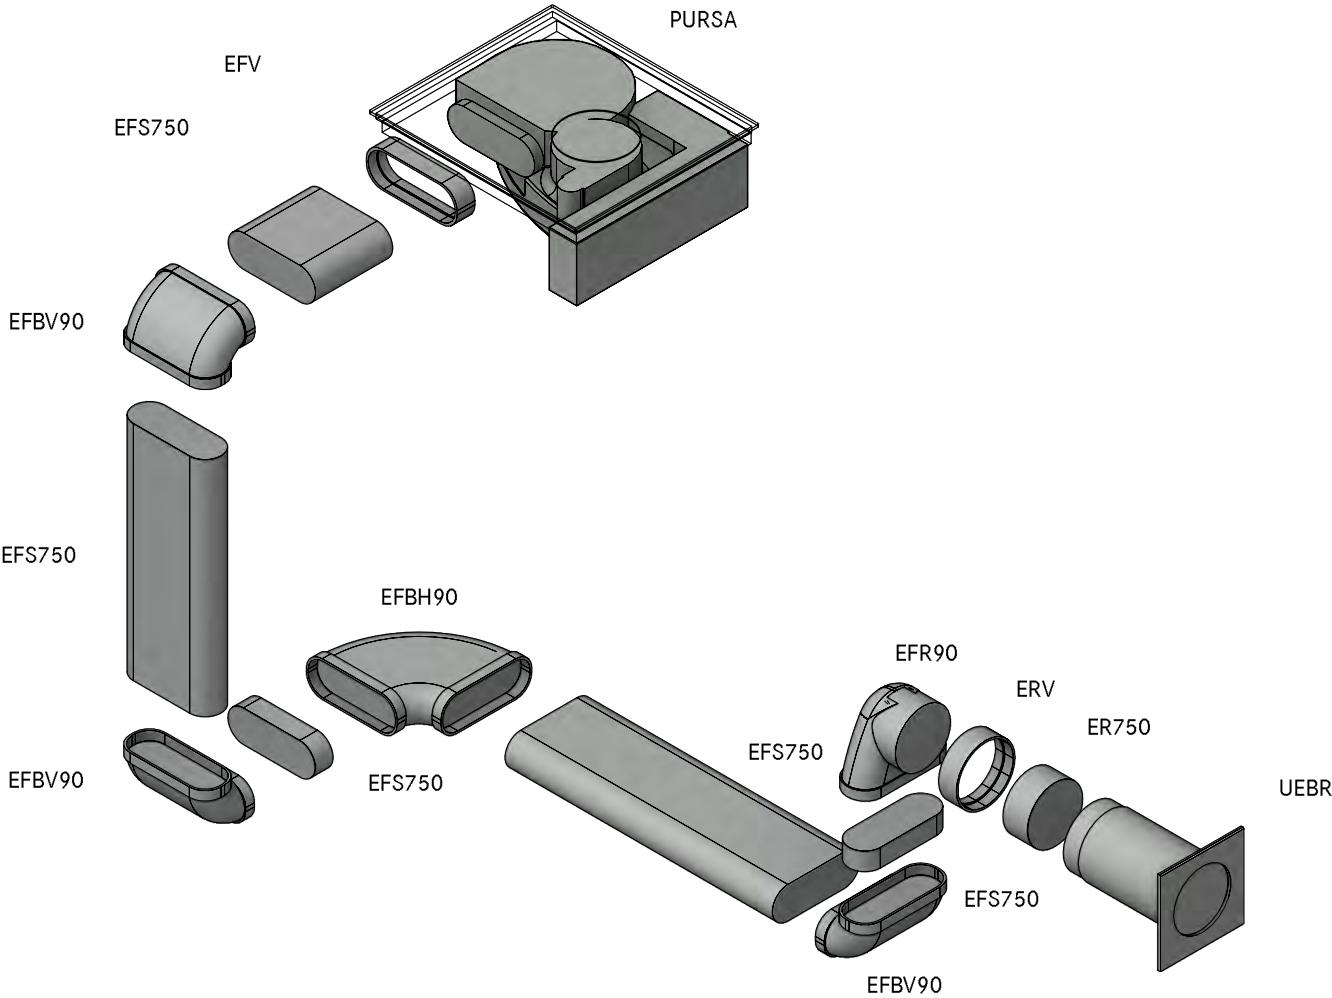


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

SPA20440  
SPure  
GR

Version, 1.0

**BORA**

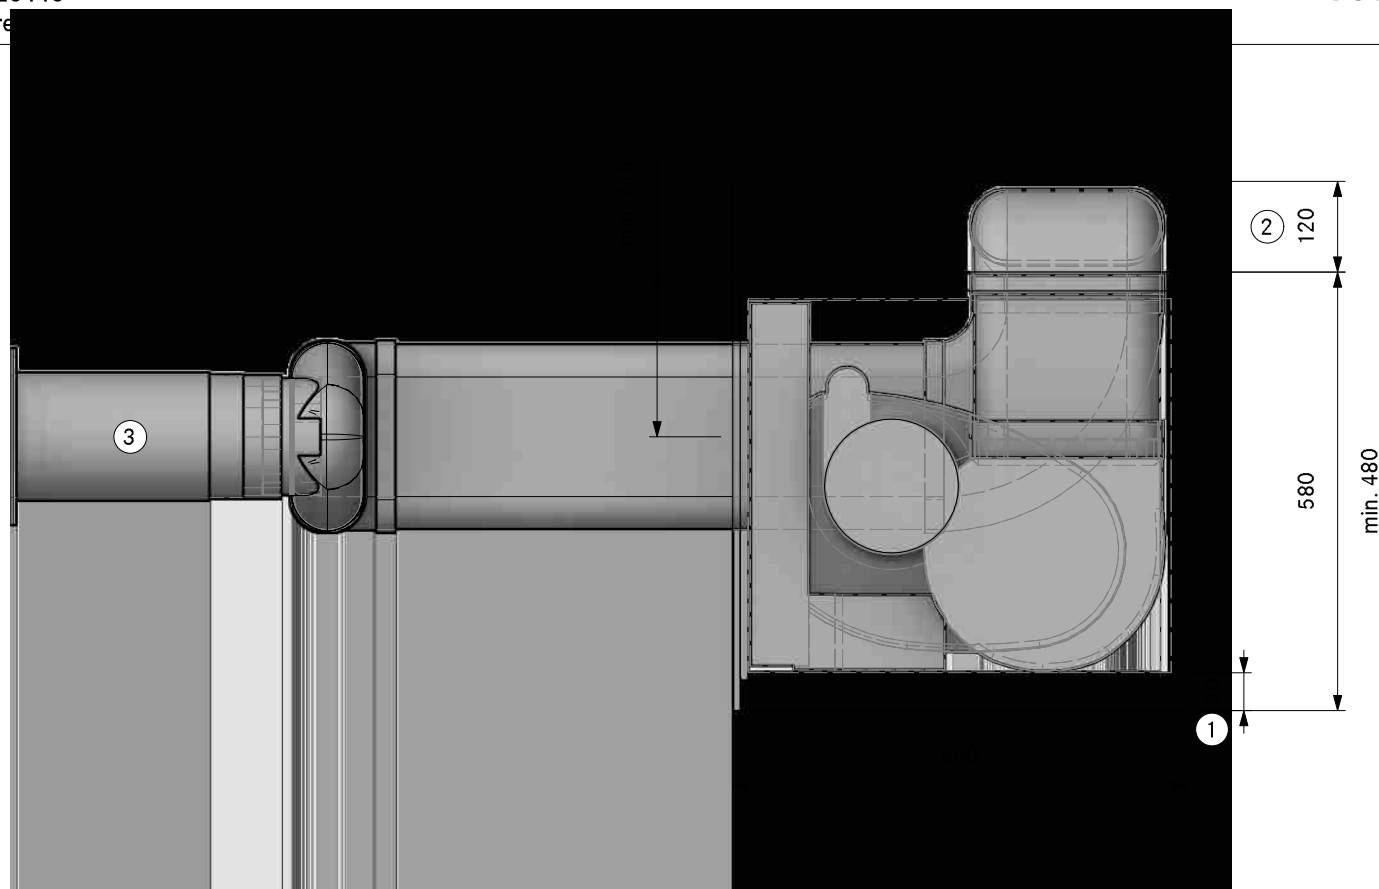

①. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.

②. Min. space required

③. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA20440**  
**SPure Plinth left swan neck UEBR**

LAYOUT

**SA**

Version, 1.0

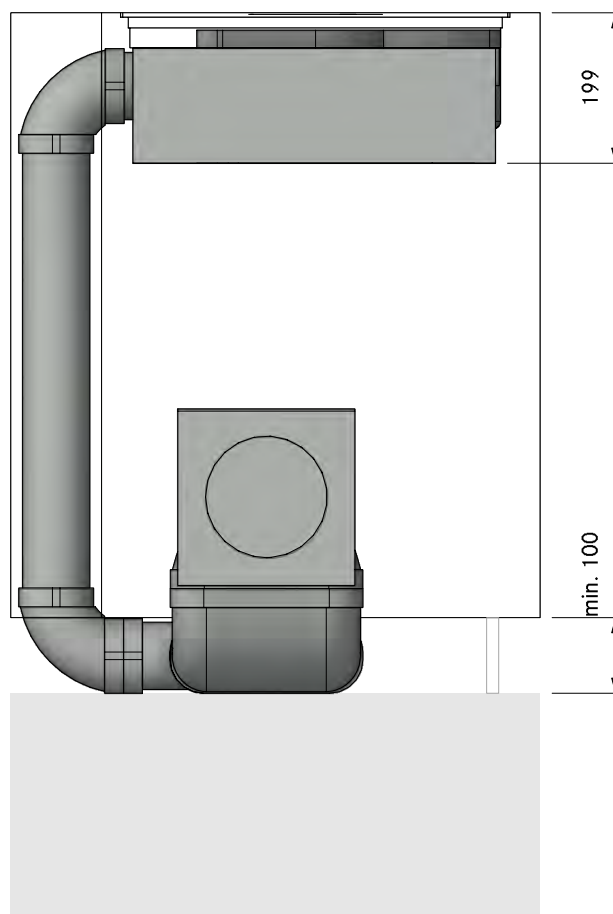




MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA20440**  
**SPure Plinth left swan neck UEBR**

LAYOUT

FA

Version, 1.0

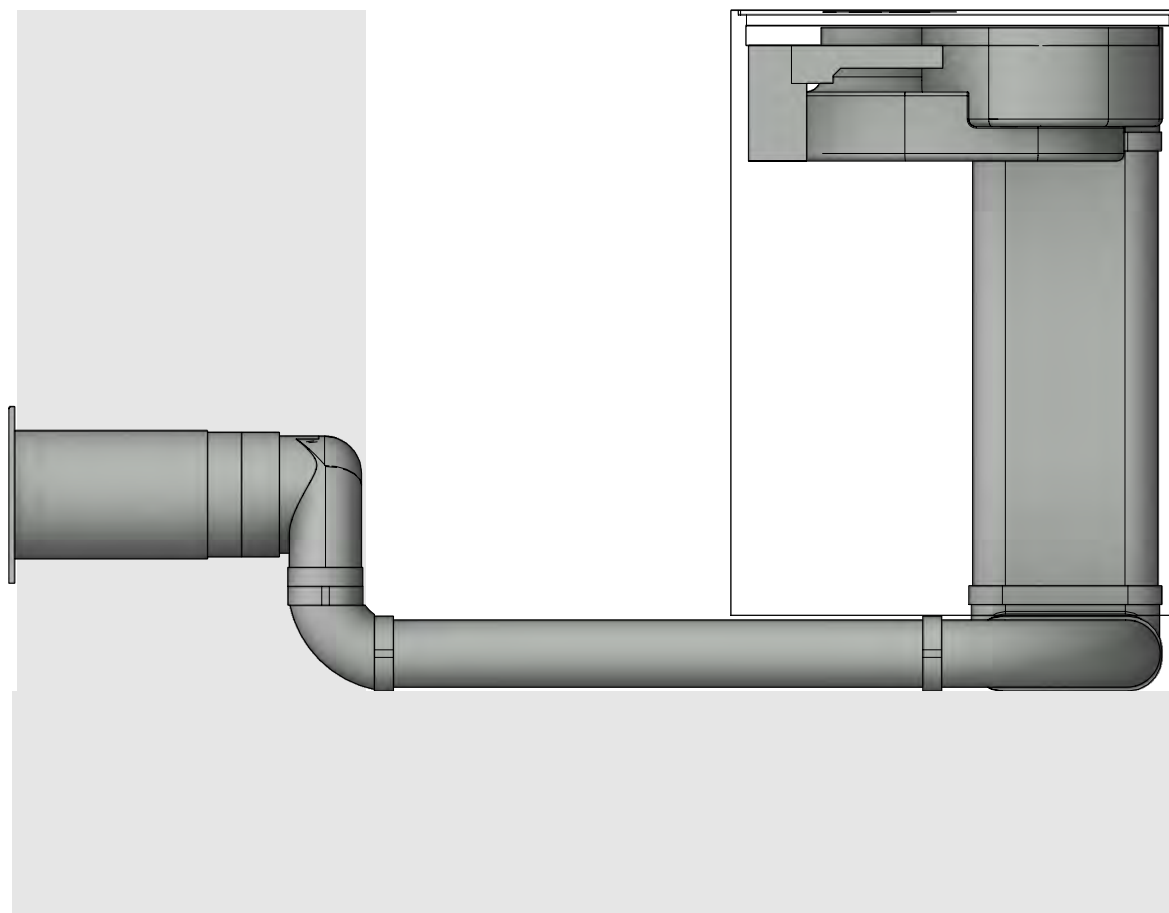

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


SPA20440  
SPure Plinth left swan neck UEBR

Version, 1.0



LAYOUT


Detail

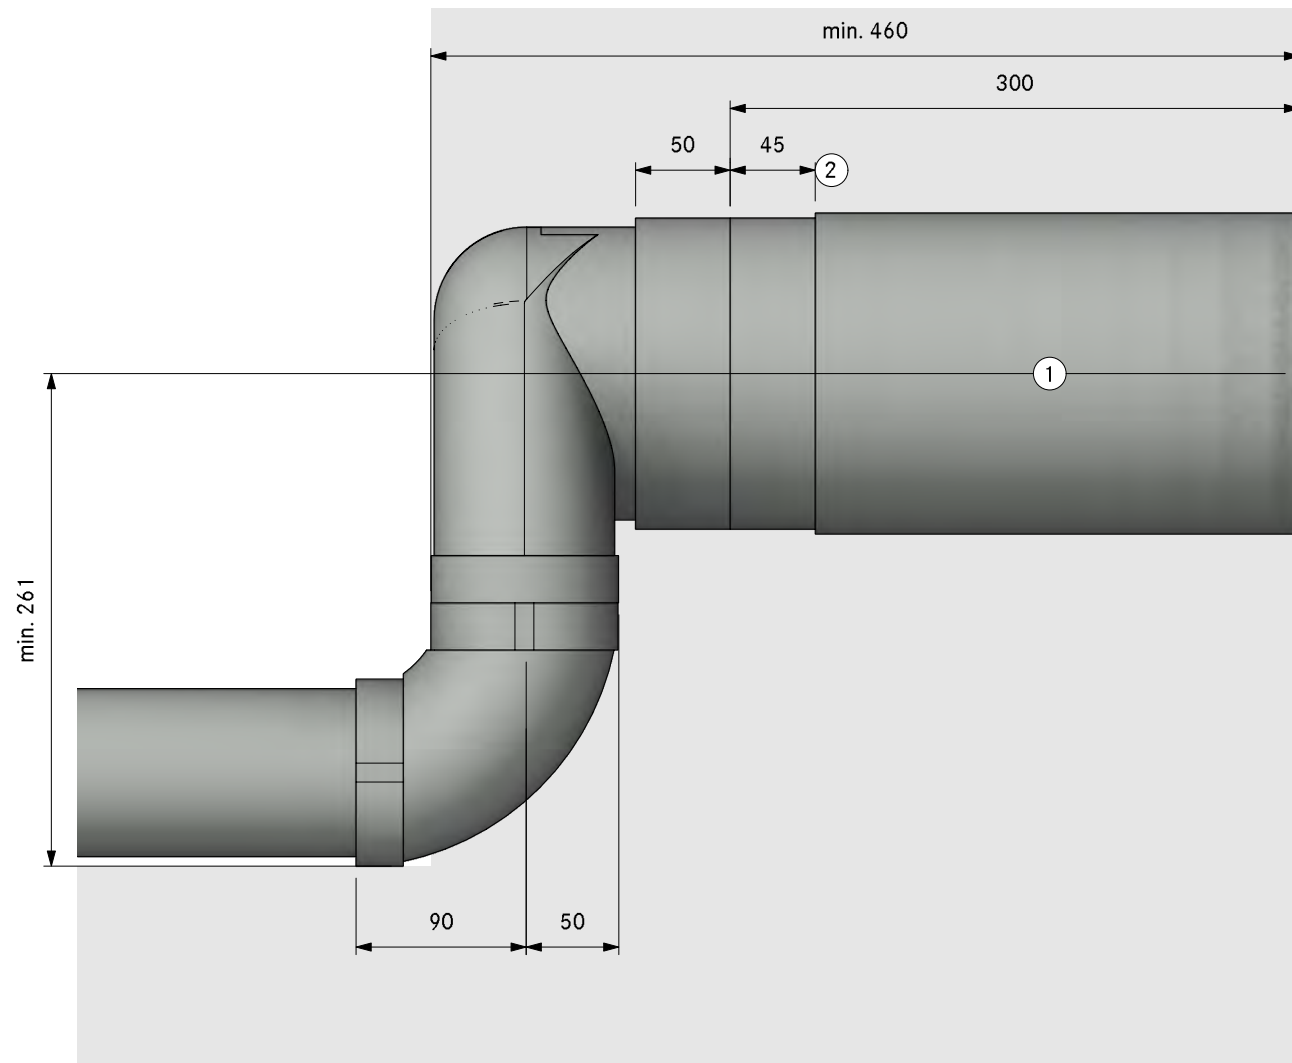

- ①. Hole size min. Ø180mm.  
Wall vent must be able to fully  
open for air to extract
- ②. Bushing length 45mm (can be  
shortened by 20mm)

# Floor

direction of the ducting to the back . . . . .	96
direction of the ducting to the right . . . . .	120
direction of the ducting to the front. . . . .	144
direction of the ducting to the left. . . . .	168

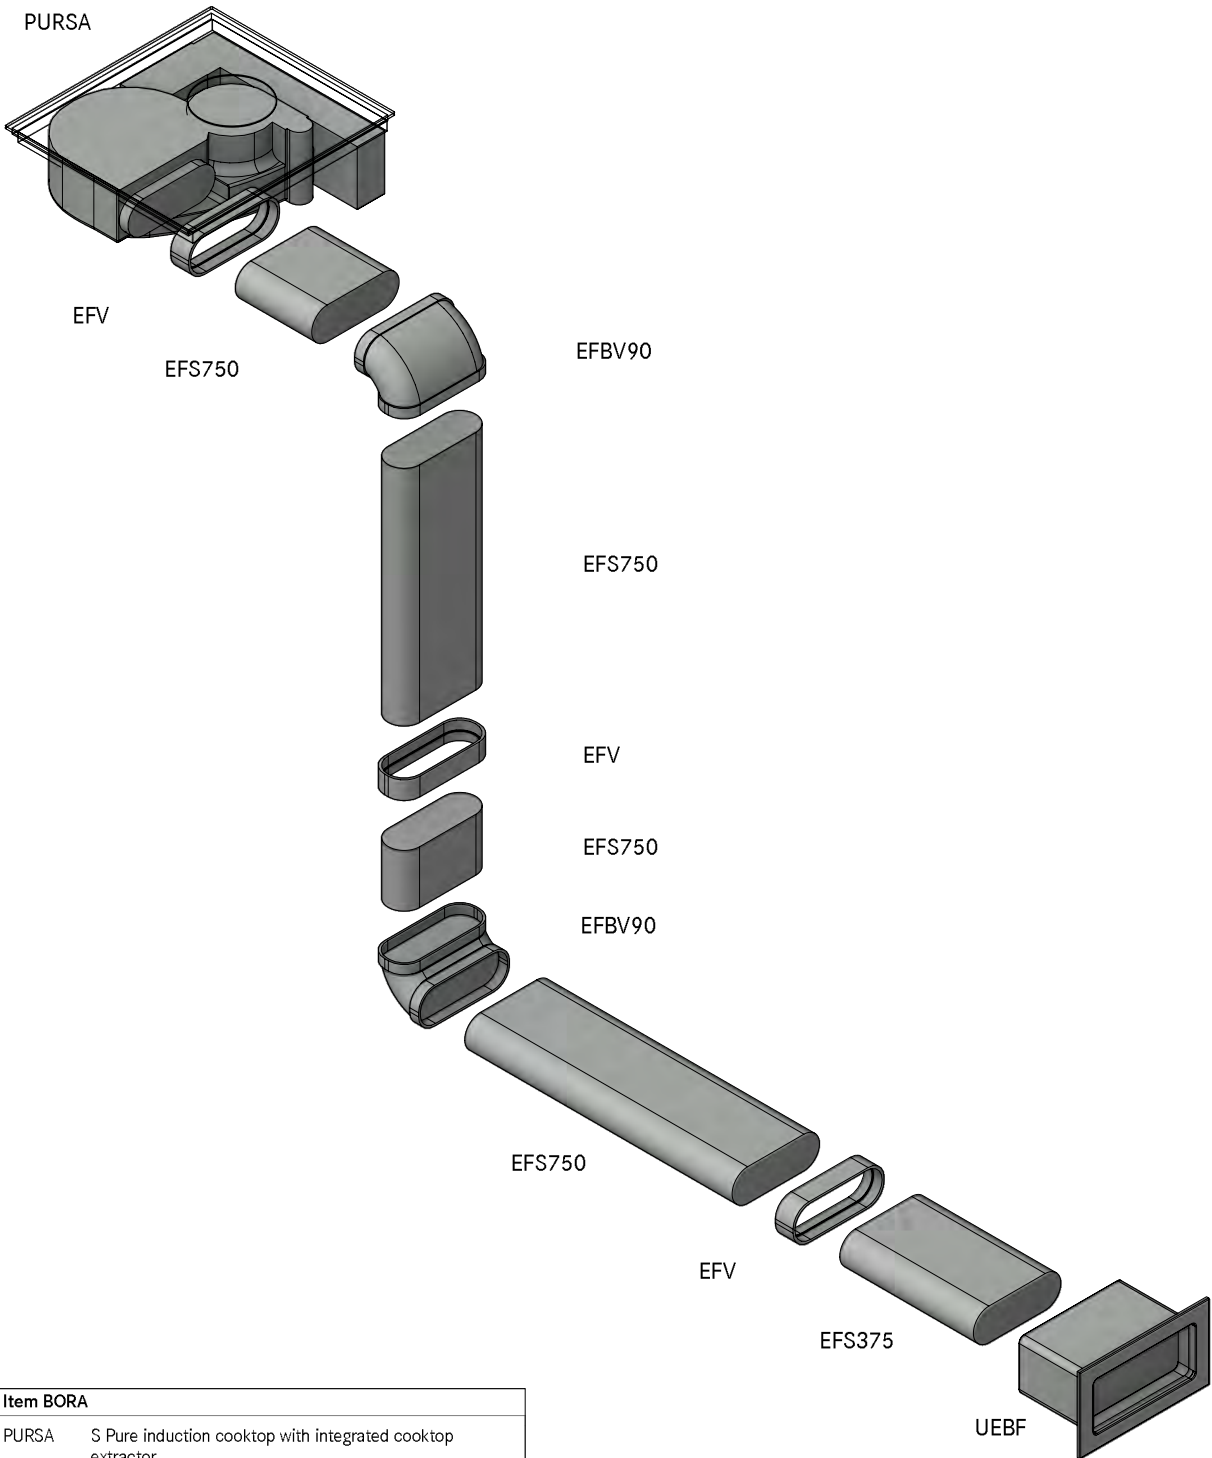

Count	Item BORA
1	PURSA S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube	
2	EFBV90 90° bend flat vertical
3	EFV duct connection flat
1	UEBF 3box wall sleeve
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

MODELPLAN

REFERENCE NUMBER

SPA30310


COMPOSITION

SPure Floor back UEBF

LAYOUT

GR HK

- ①. At least 50 mm to cut distance is a recommendation. Please contact your wall manufacturer for the exact distance.
- ②. Min. space required
- ③. Connection point Ecot
- ④. Installation in floor structure according to DIN 18560 completely in the level. If the floor structure deviates from DIN18560-2, a secondary reinforcement layer is required.
- ⑤. Hole size 310 x 155mm. Wall vent must be able to open for air to extract.

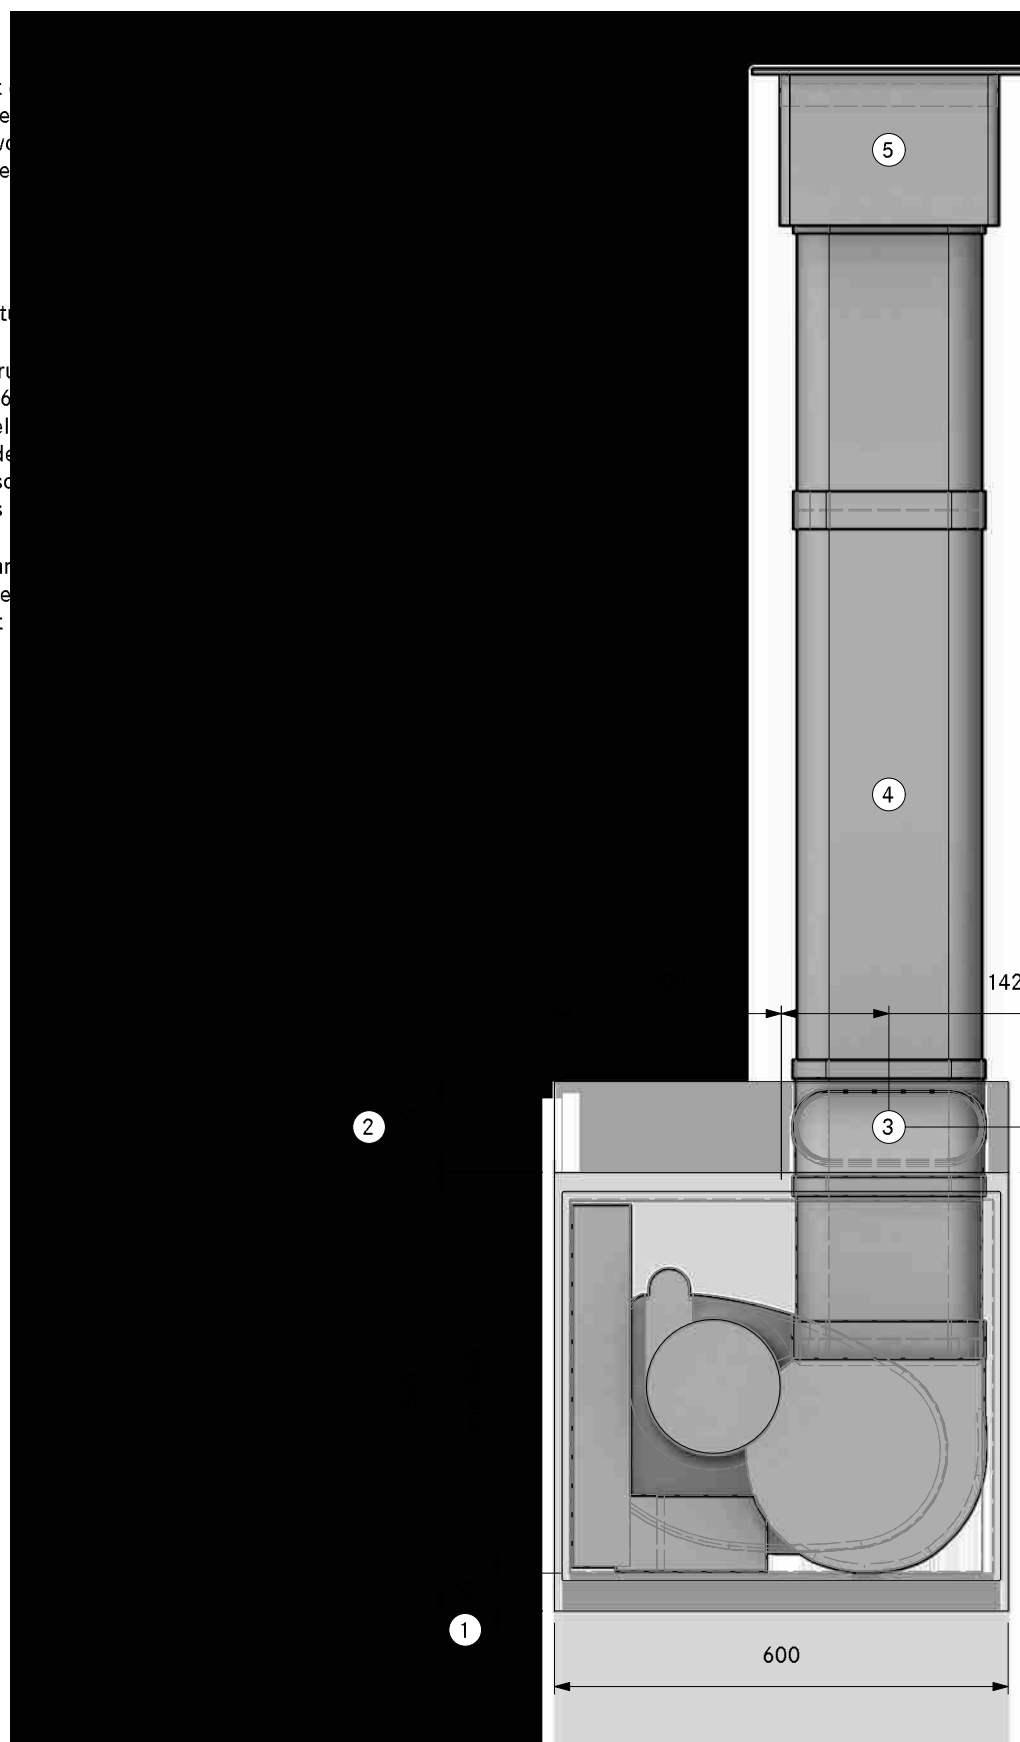


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA30310**  
**SPure Floor back UEBF**

LAYOUT

**SA**

Version, 1.0

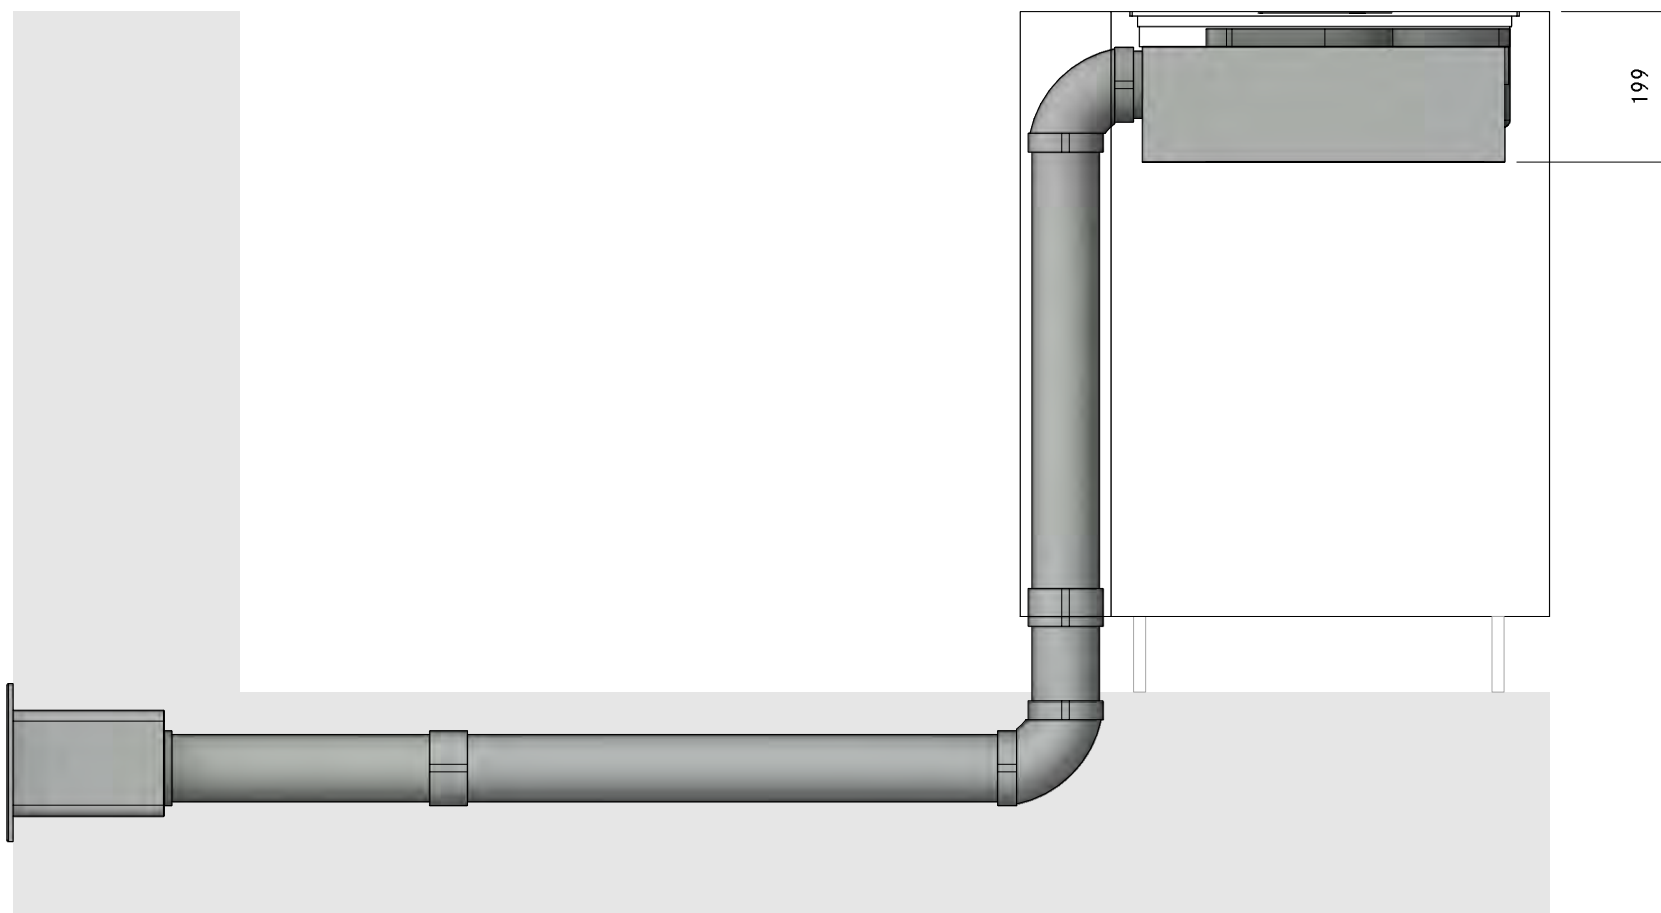

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


**SPA30310**  
**SPure Floor back UEBF**

Version, 1.0



LAYOUT

FA

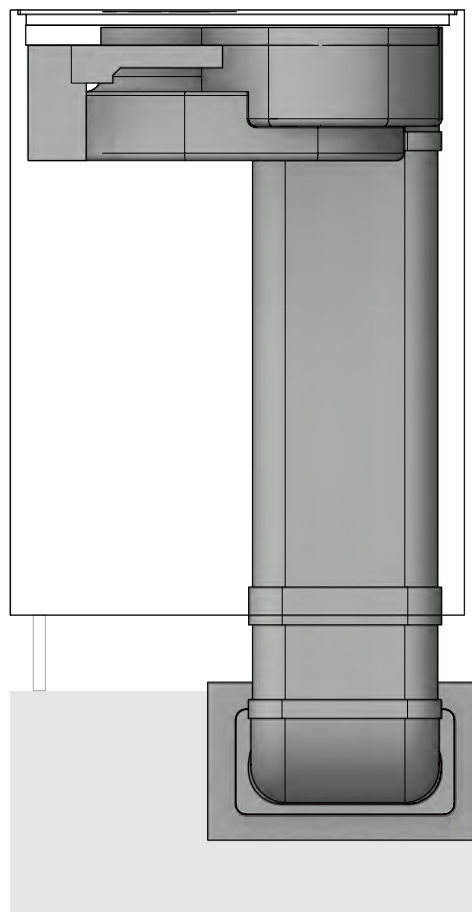


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA30310  
SPure Floor back UEBF

LAYOUT


Detail

Version, 1.0

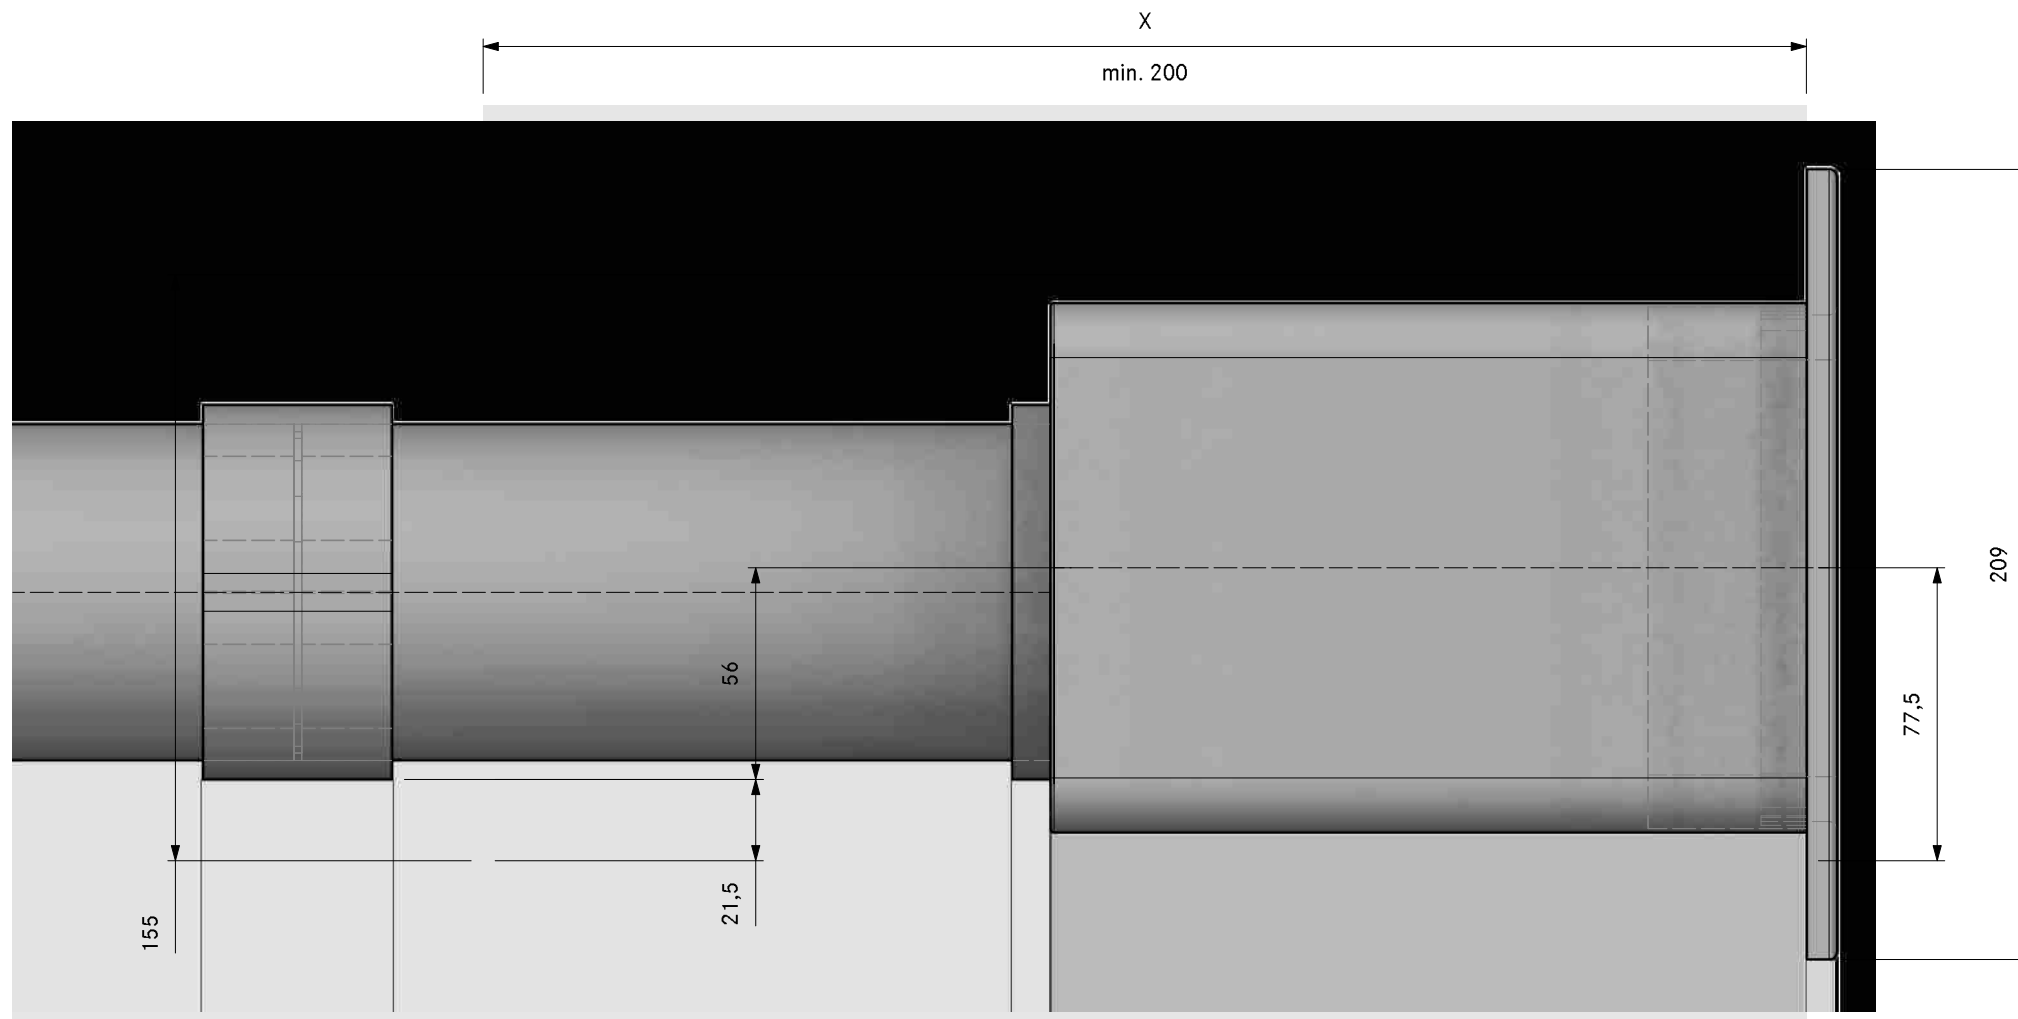





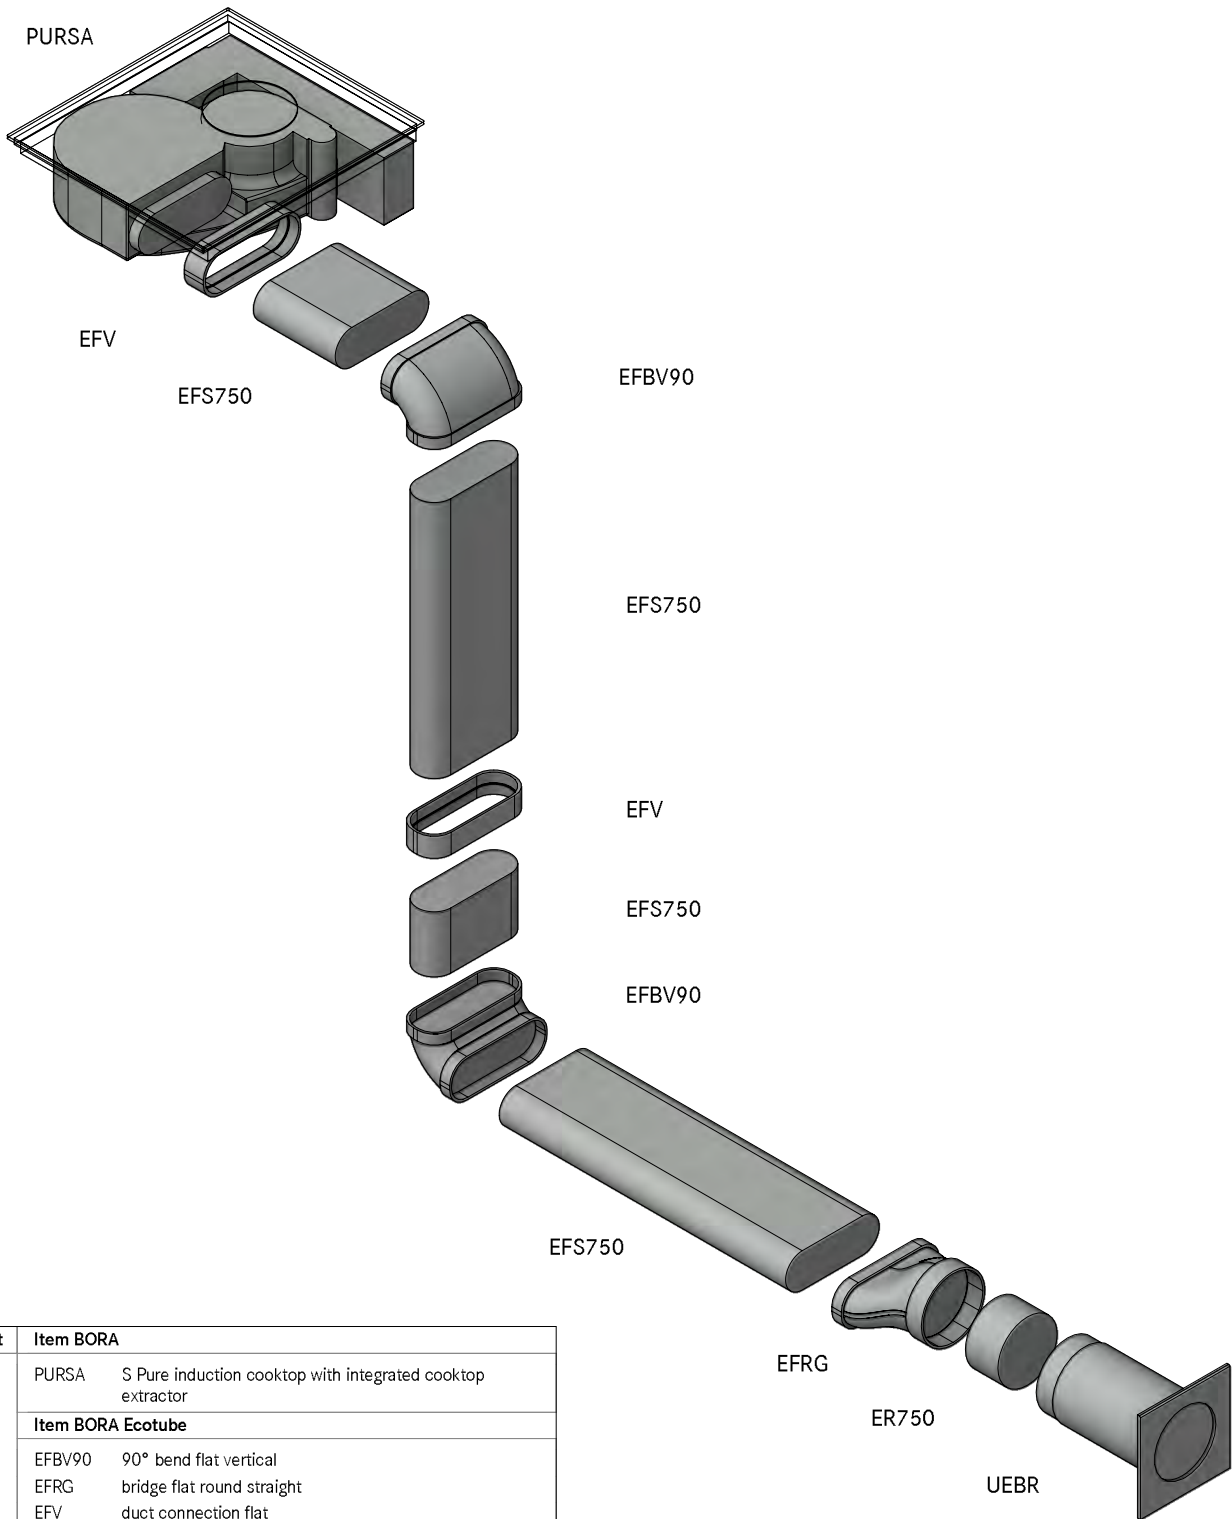


Count	Item BORA
1	PURSA S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube	
2	EFBV90 90° bend flat vertical
1	EFRG bridge flat round straight
2	EFV duct connection flat
1	UEBR 3box wall sleeve round
1	ER750 round duct 750mm
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

MODELPLAN	
REFERENCE NUMBER	SPA30320
COMPOSITION	SPure Floor back UEBR
LAYOUT	GR HK

- ① At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- ② Min. space required
- ③ Connection point Ecotube
- ④ Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
- ⑤ Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

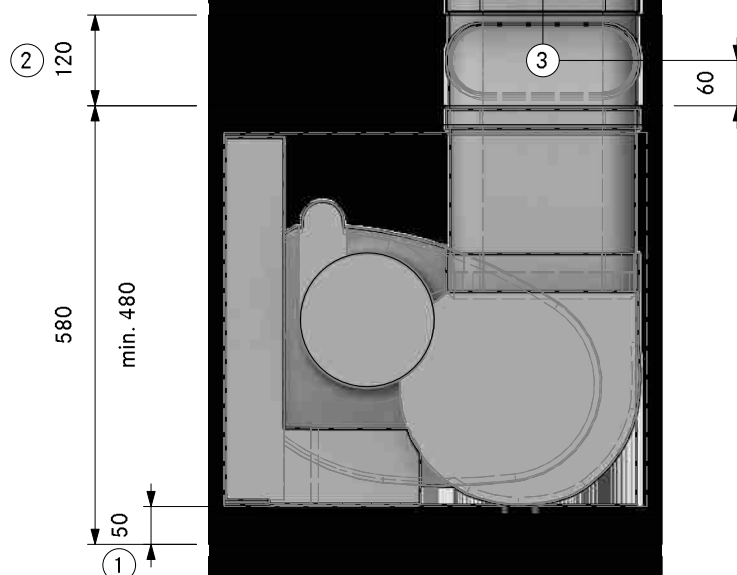


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA30320**  
**SPure Floor back UEBR**

LAYOUT

**SA**

Version, 1.0

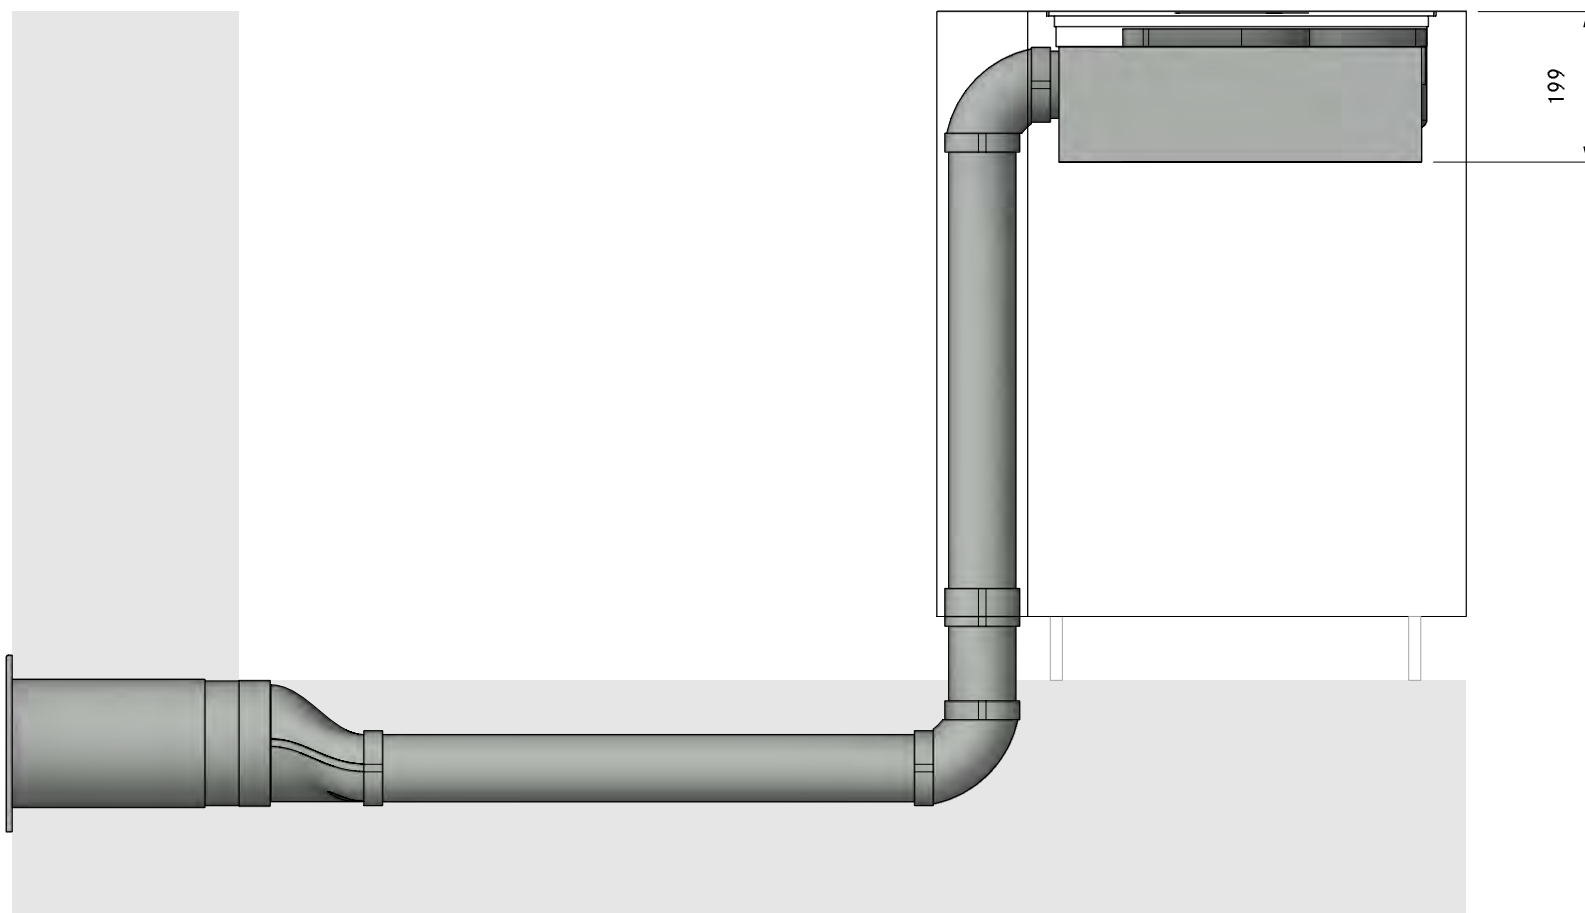


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA30320**  
**SPure Floor back UEBR**

LAYOUT


**FA**

Version, 1.0

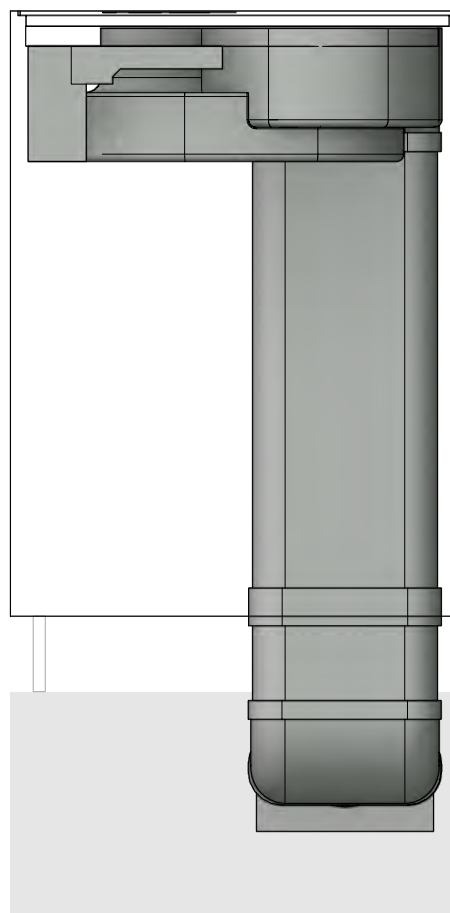


LAYOUT

Detail

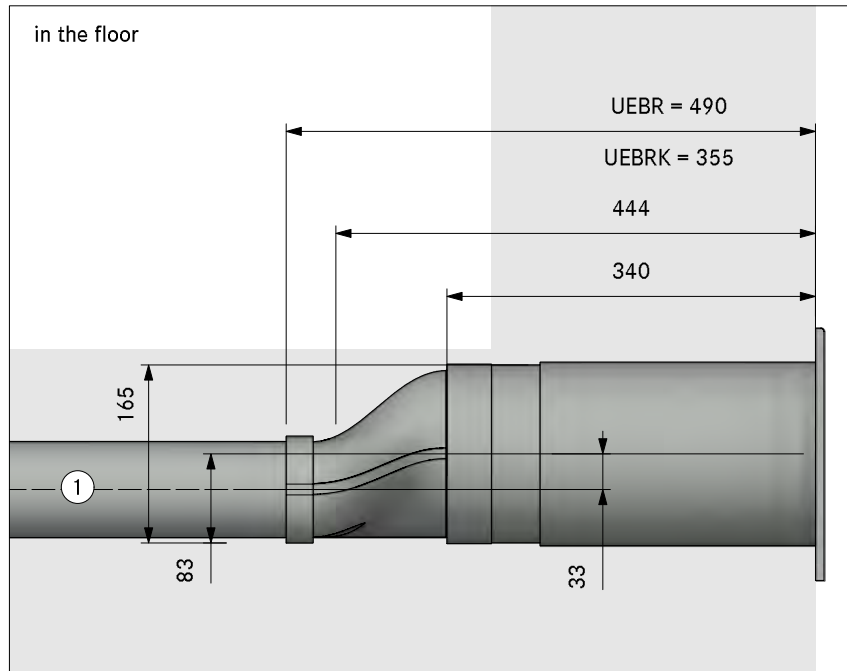


in the plinth area

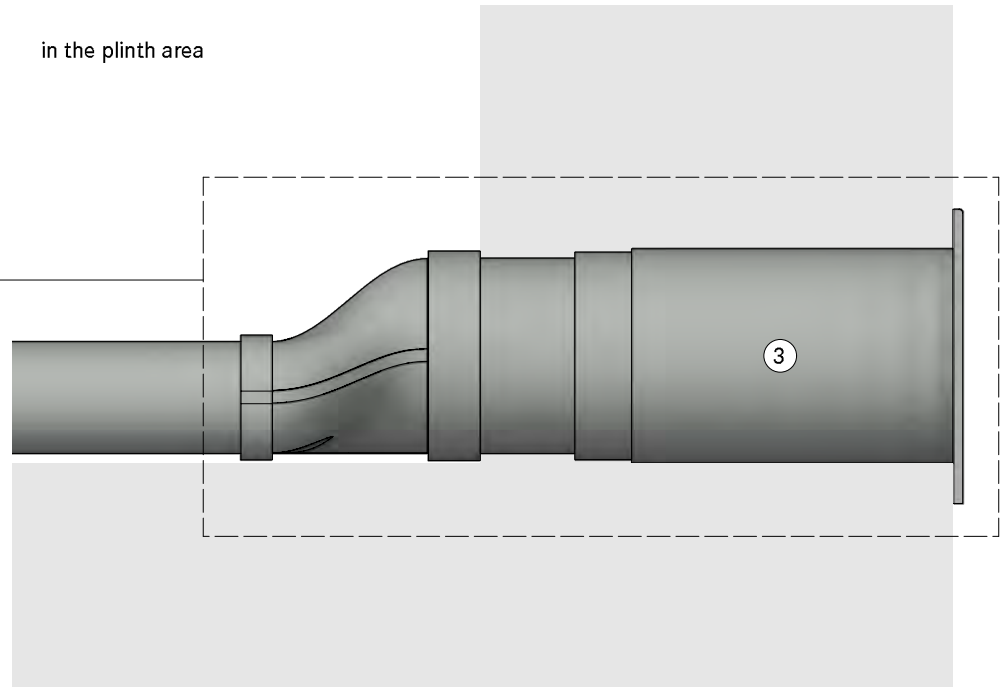


1. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
2. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

in the cellar

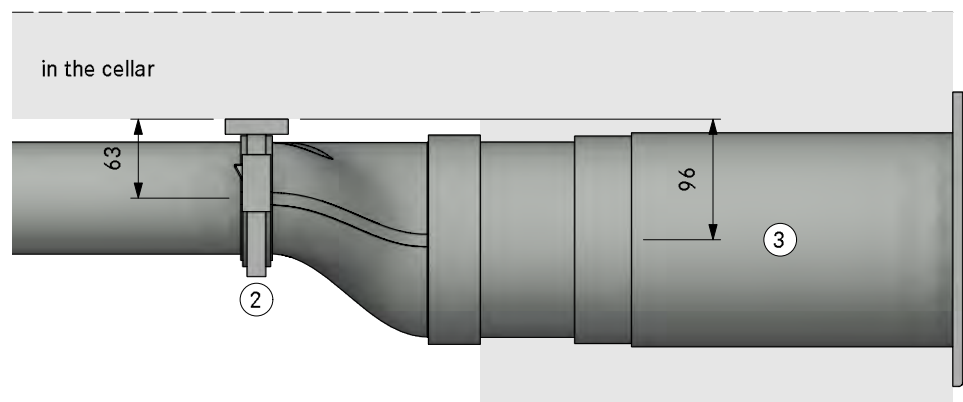



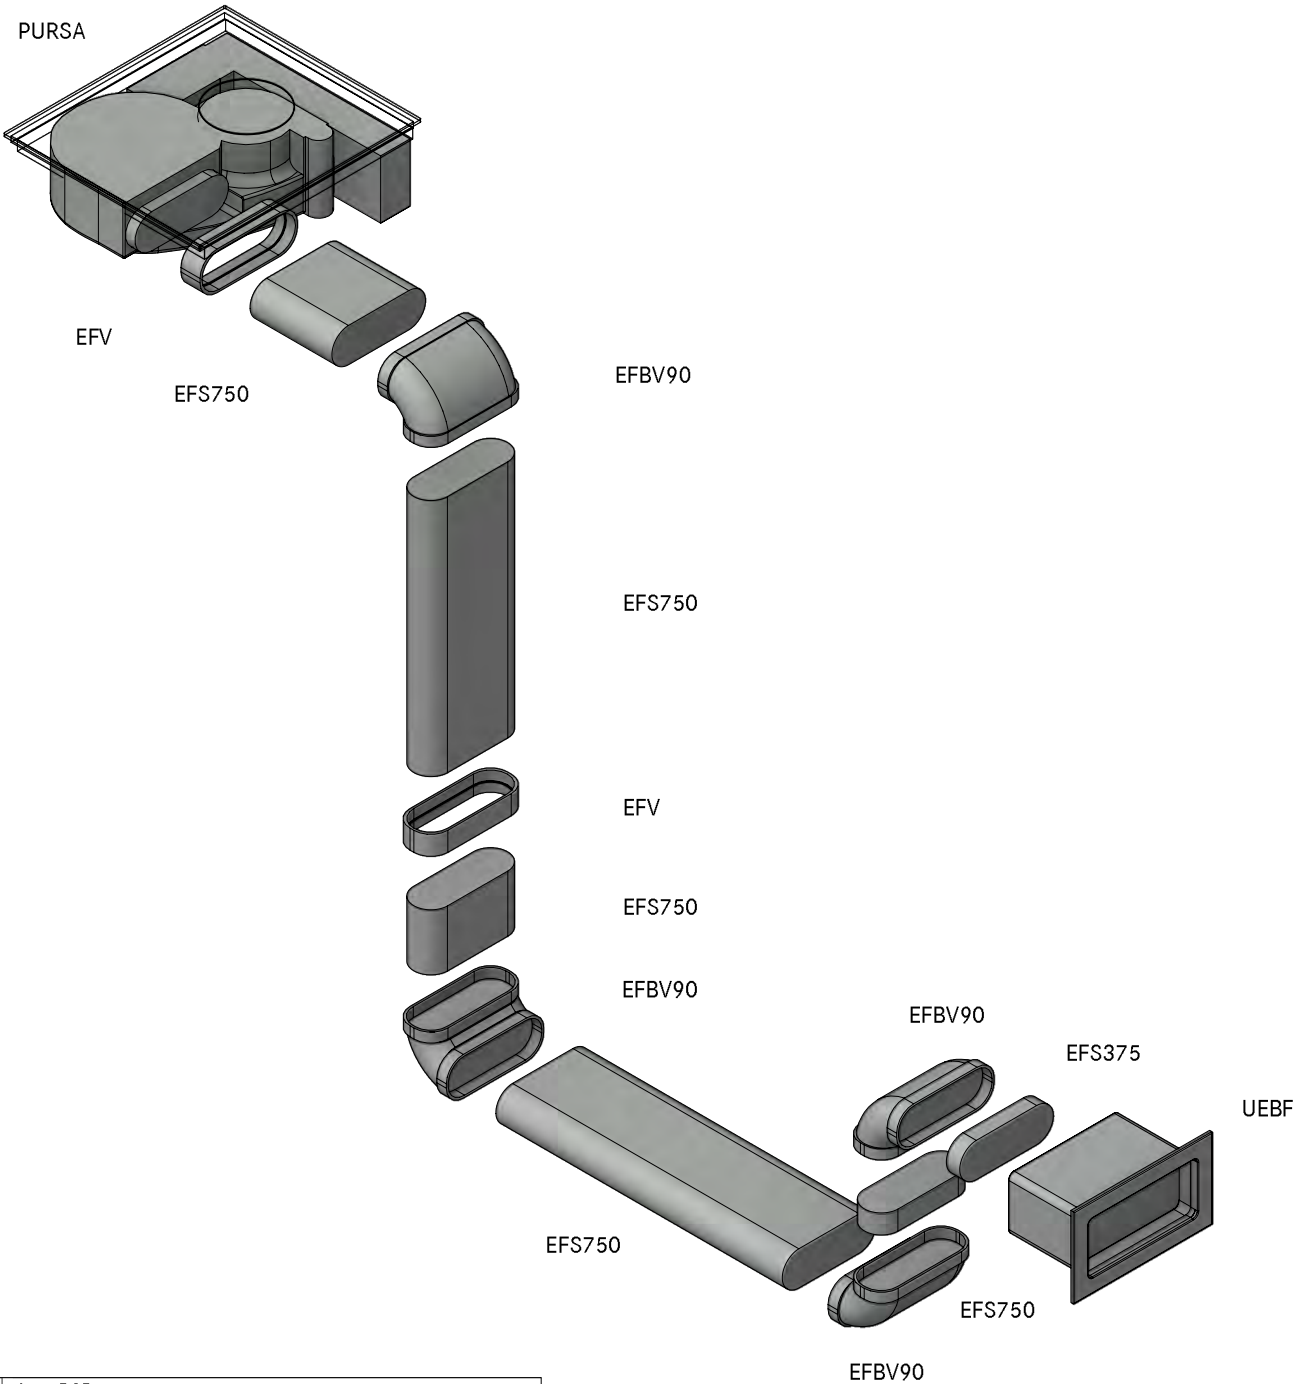


Count	Item BORA
1	PURSA S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube	
4	EFBV90 90° bend flat vertical
2	EFV duct connection flat
1	UEBF 3box wall sleeve
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.



MODELPLAN	
REFERENCE NUMBER	S
COMPOSITION	S
LAYOUT	G

- ①. At least 50 mm to cut distance is a recommendation. Please contact your wall manufacturer for the exact distance.
- ②. Min. space required
- ③. Connection point Ecot
- ④. Installation in floor structure according to DIN 18560 completely in the level. If the floor structure deviates from DIN18560-2, a secondary reinforcement layer is required.
- ⑤. Hole size 310 x 155mm. Wall vent must be able to open for air to extract.

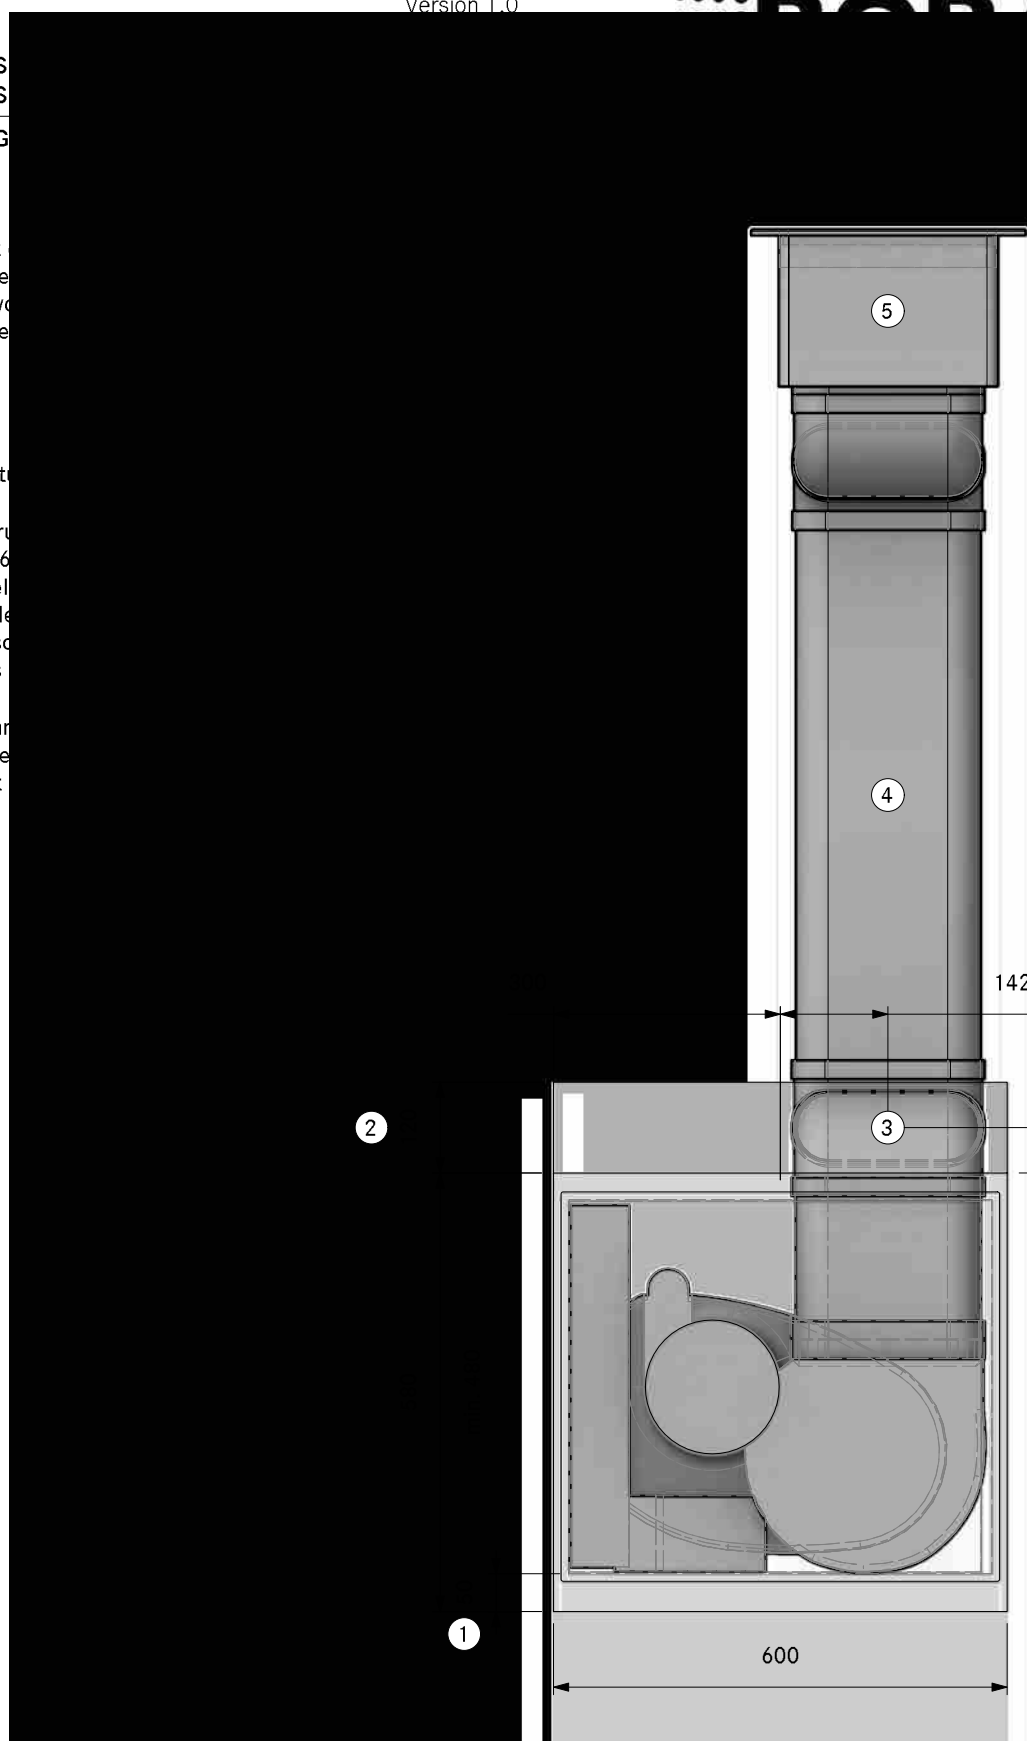


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA30130**  
**SPure Floor back swan neck UEBF**

LAYOUT

**SA**

Version, 1.0

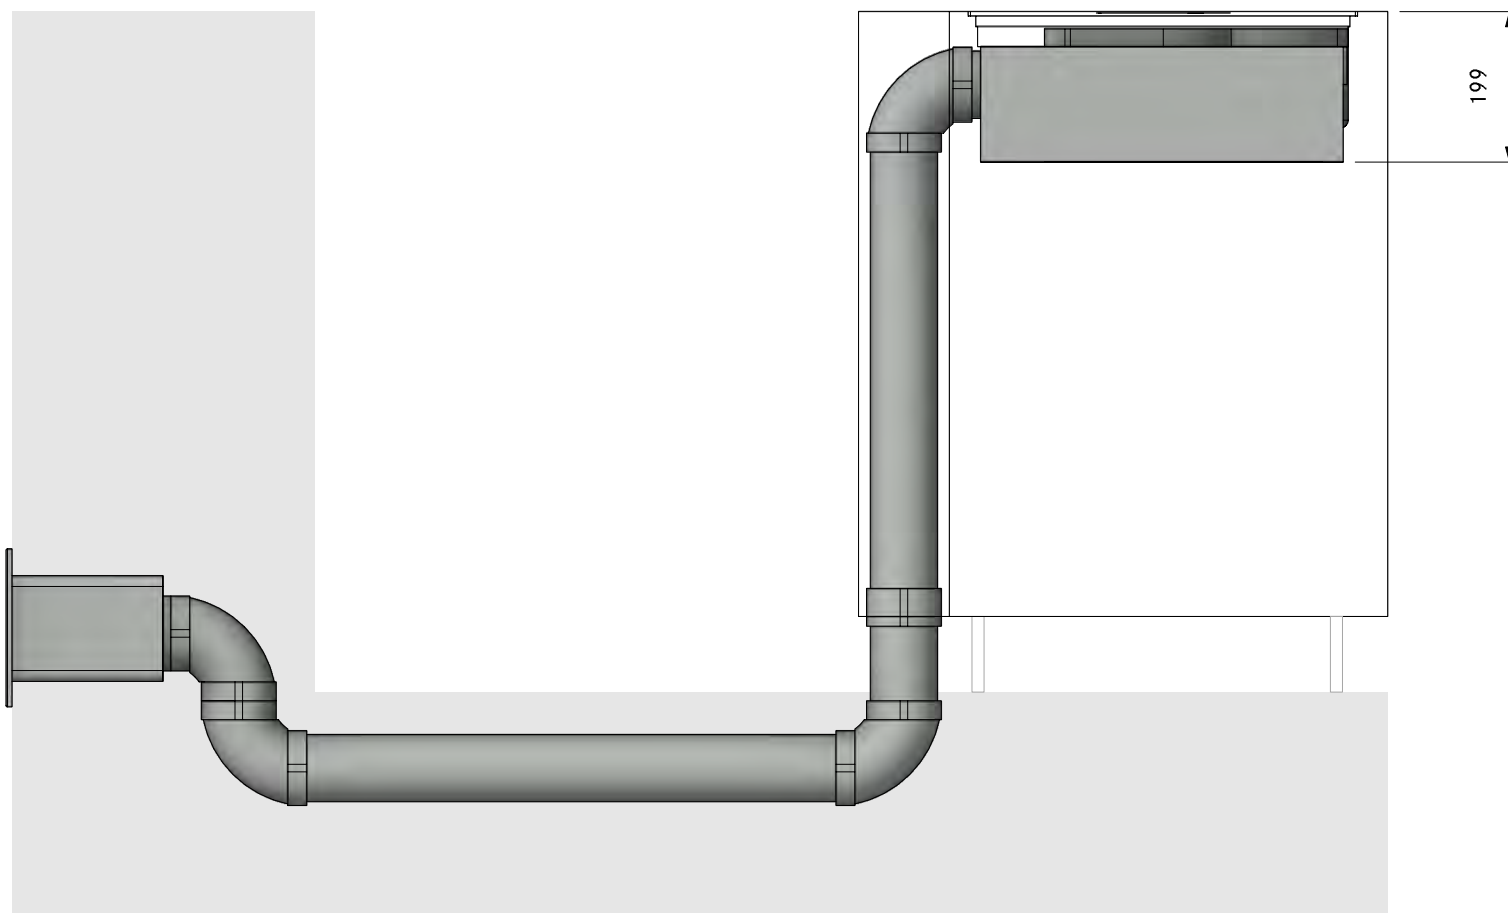


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA30130**  
**SPure Floor back swan neck UEBF**

LAYOUT

FA

Version, 1.0

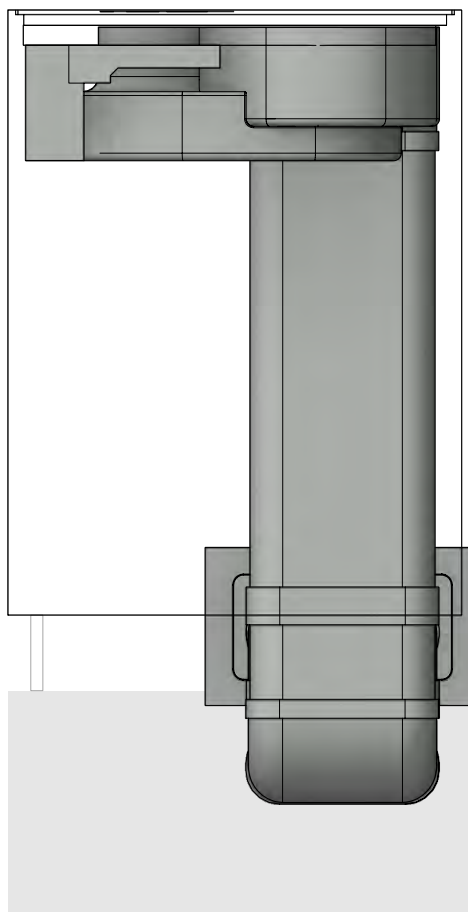

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


SPA30130  
SPure Floor back swan neck UEBF

Version, 1.0




LAYOUT

Detail

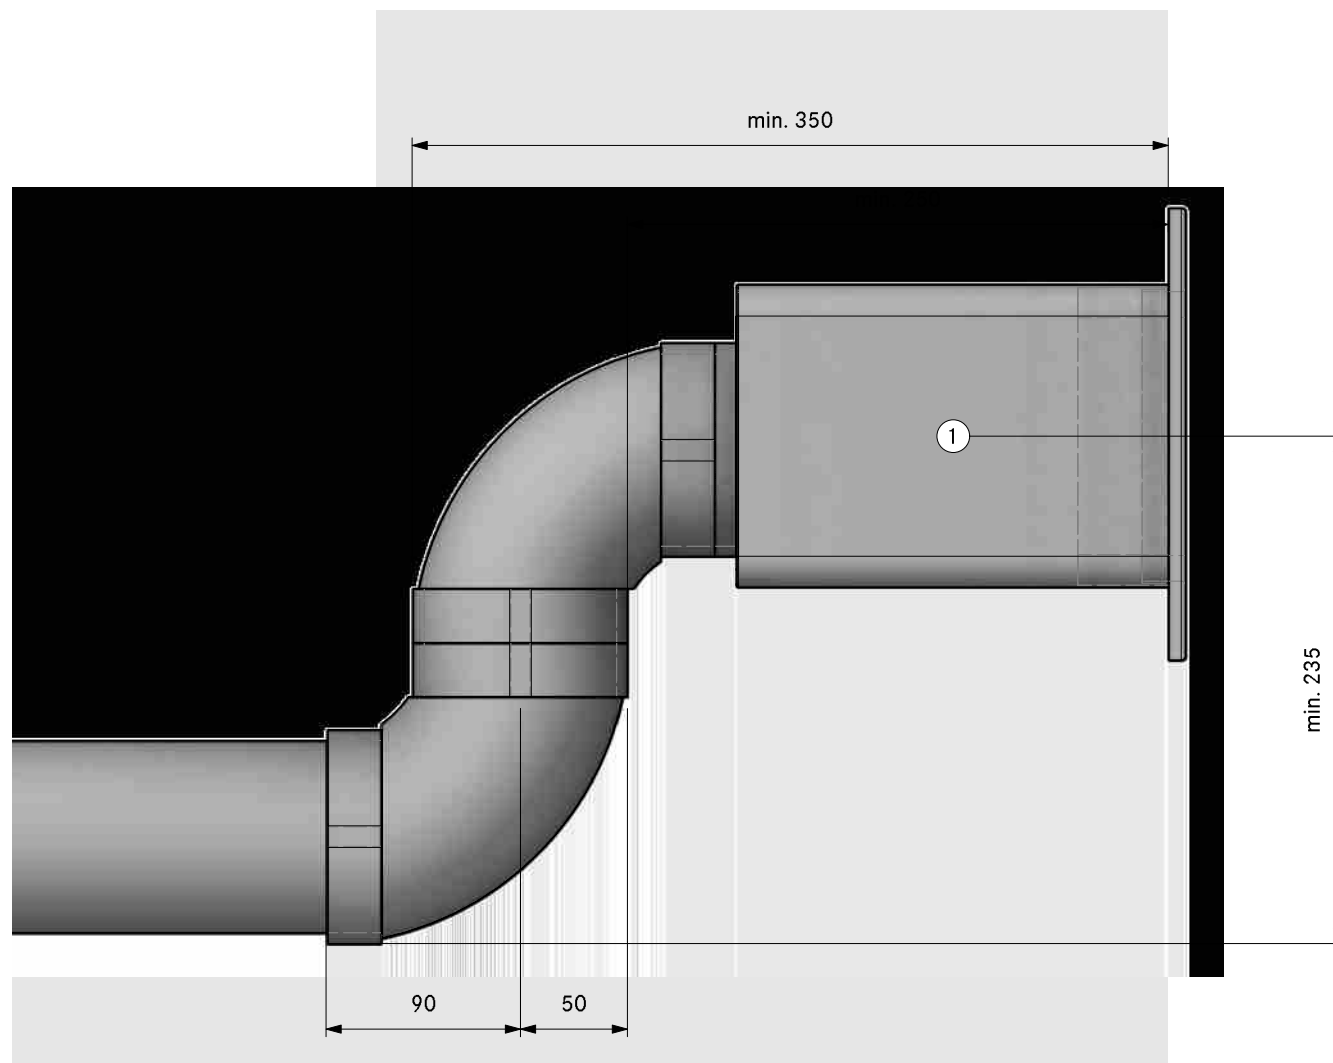

- ①. Hole size 310 x 155mm  
Wall vent must be able to fully  
open for air to extract



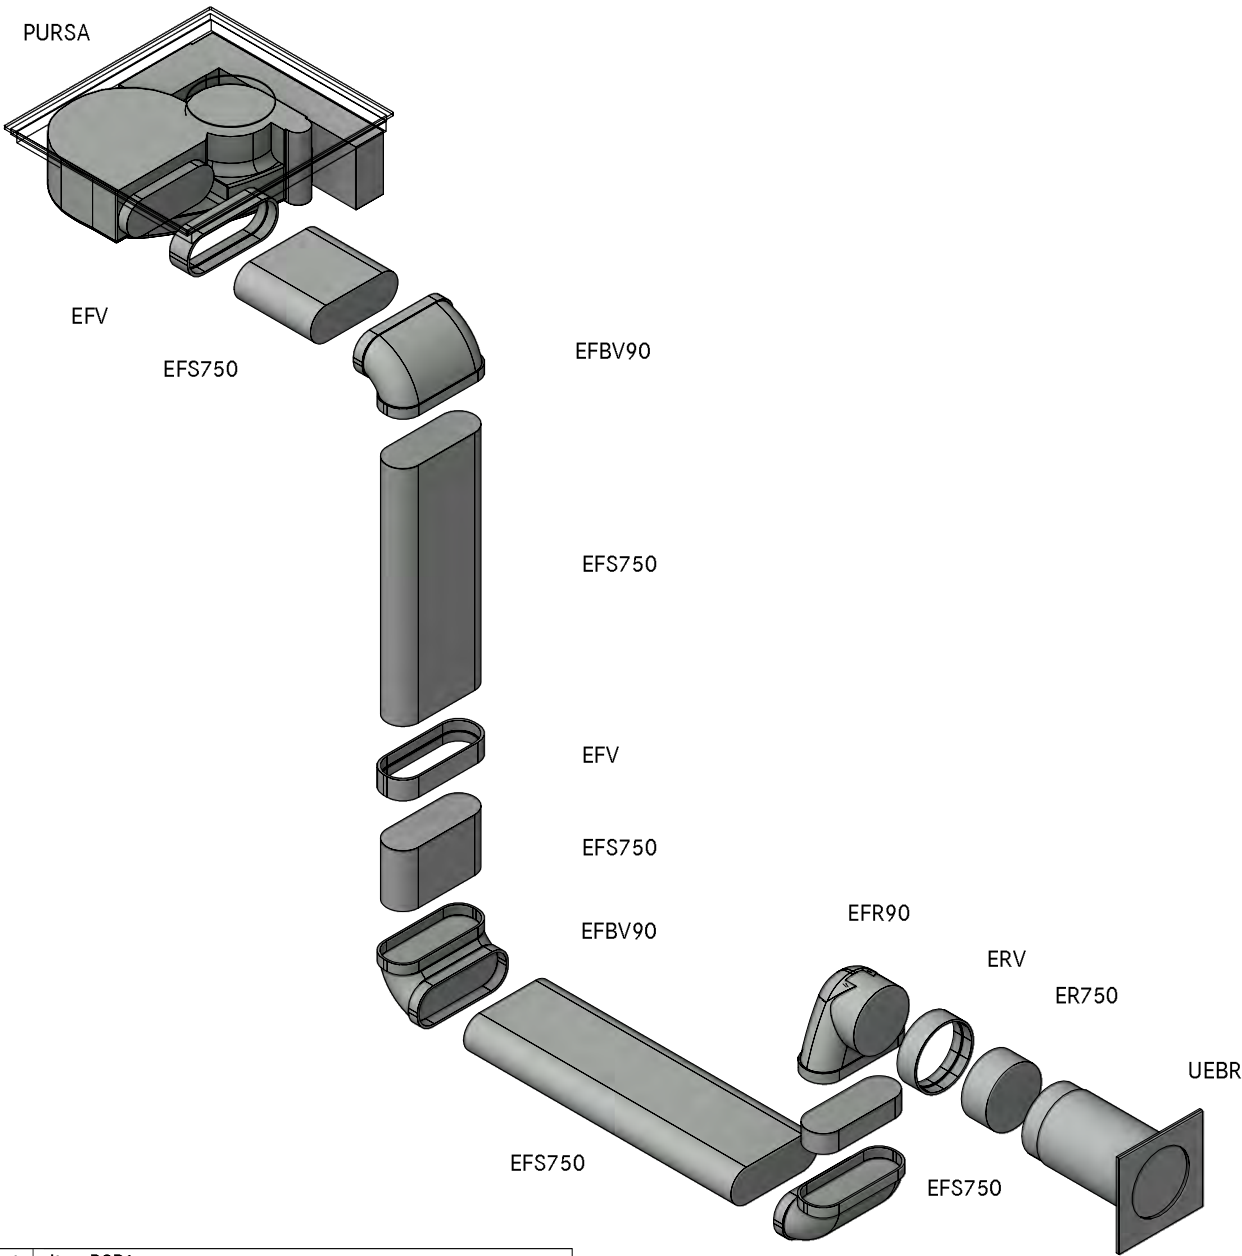


Count	Item BORA
1	PURSA S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube	
3	EFBV90 90° bend flat vertical
1	EFR90 transition flat round 90°
2	EFV duct connection flat
1	ERV duct connection round
1	UEBR 3box wall sleeve round
1	ER750 round duct 750mm
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

MODELPLAN	
REFERENCE NUMBER	SPA30340
COMPOSITION	SPure Floor back swan neck UEBR
LAYOUT	GR HK

- ① At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- ② Min. space required
- ③ Connection point Ecotube
- ④ Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
- ⑤ Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

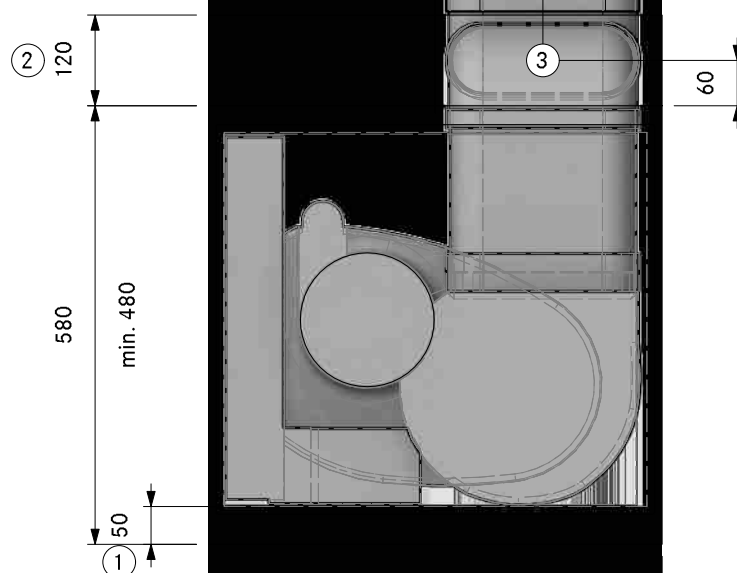


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA30340**  
**SPure Floor back swan neck UEBR**

LAYOUT

**SA**

Version, 1.0

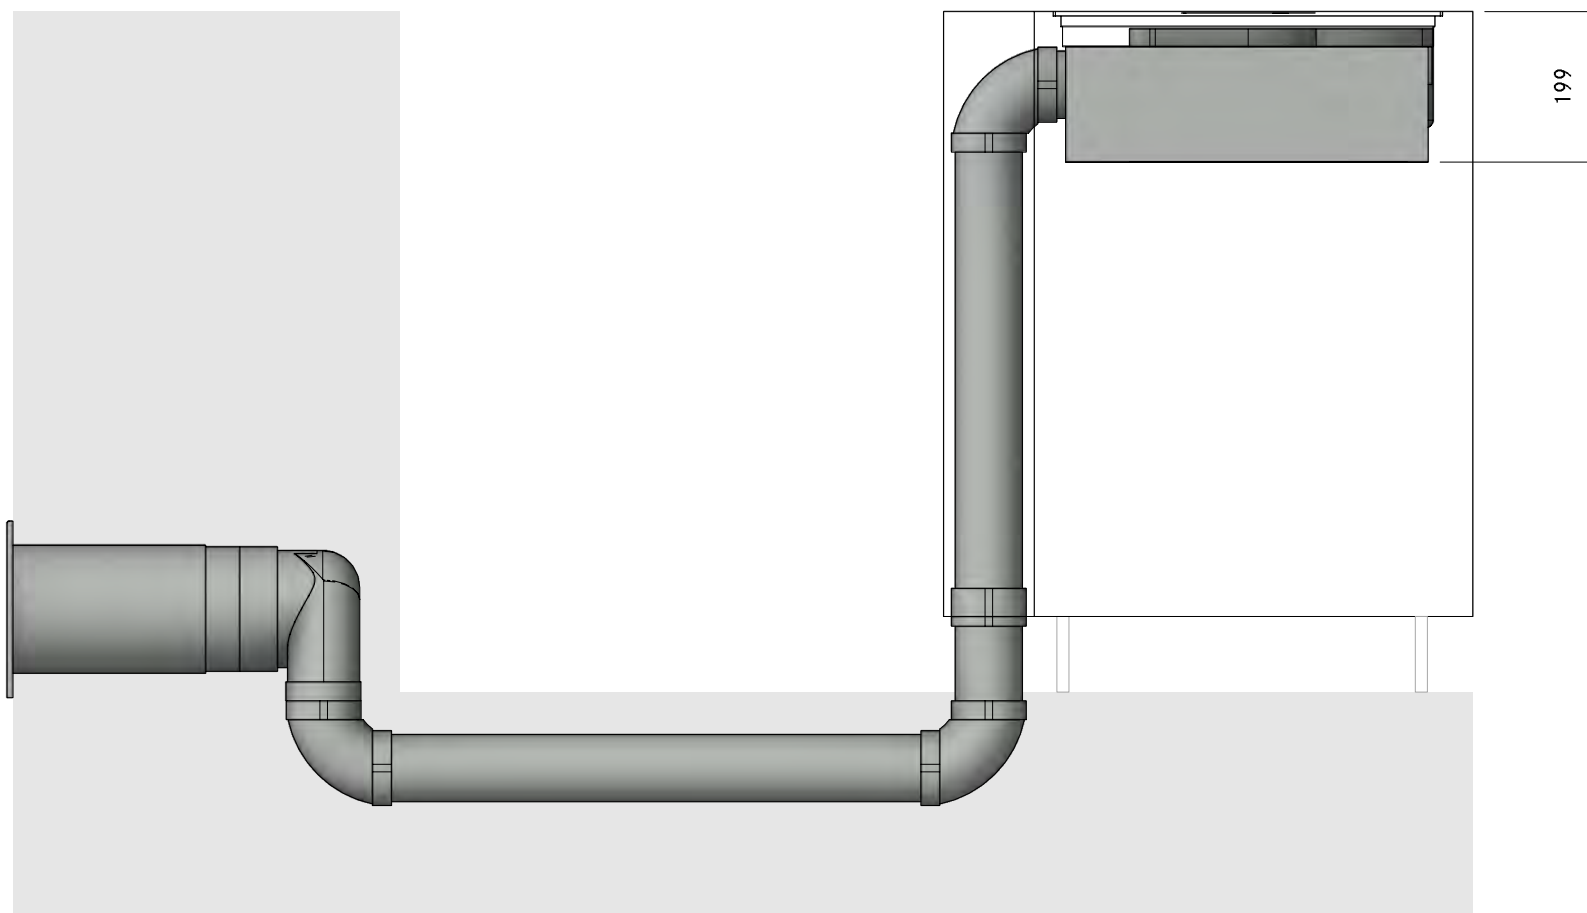



MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


**SPA30340**  
**SPure Floor back swan neck UEBR**

Version, 1.0



LAYOUT


FA

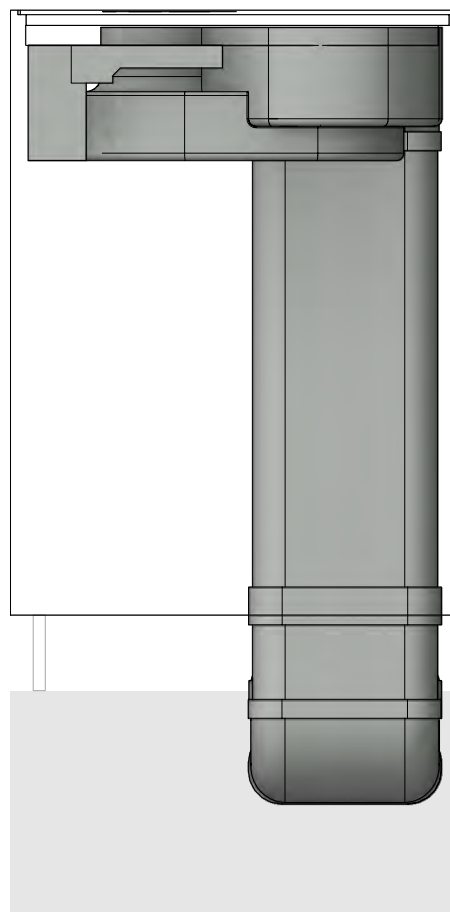

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


SPA30340  
SPure Floor back swan neck UEBR

Version, 1.0



LAYOUT


Detail

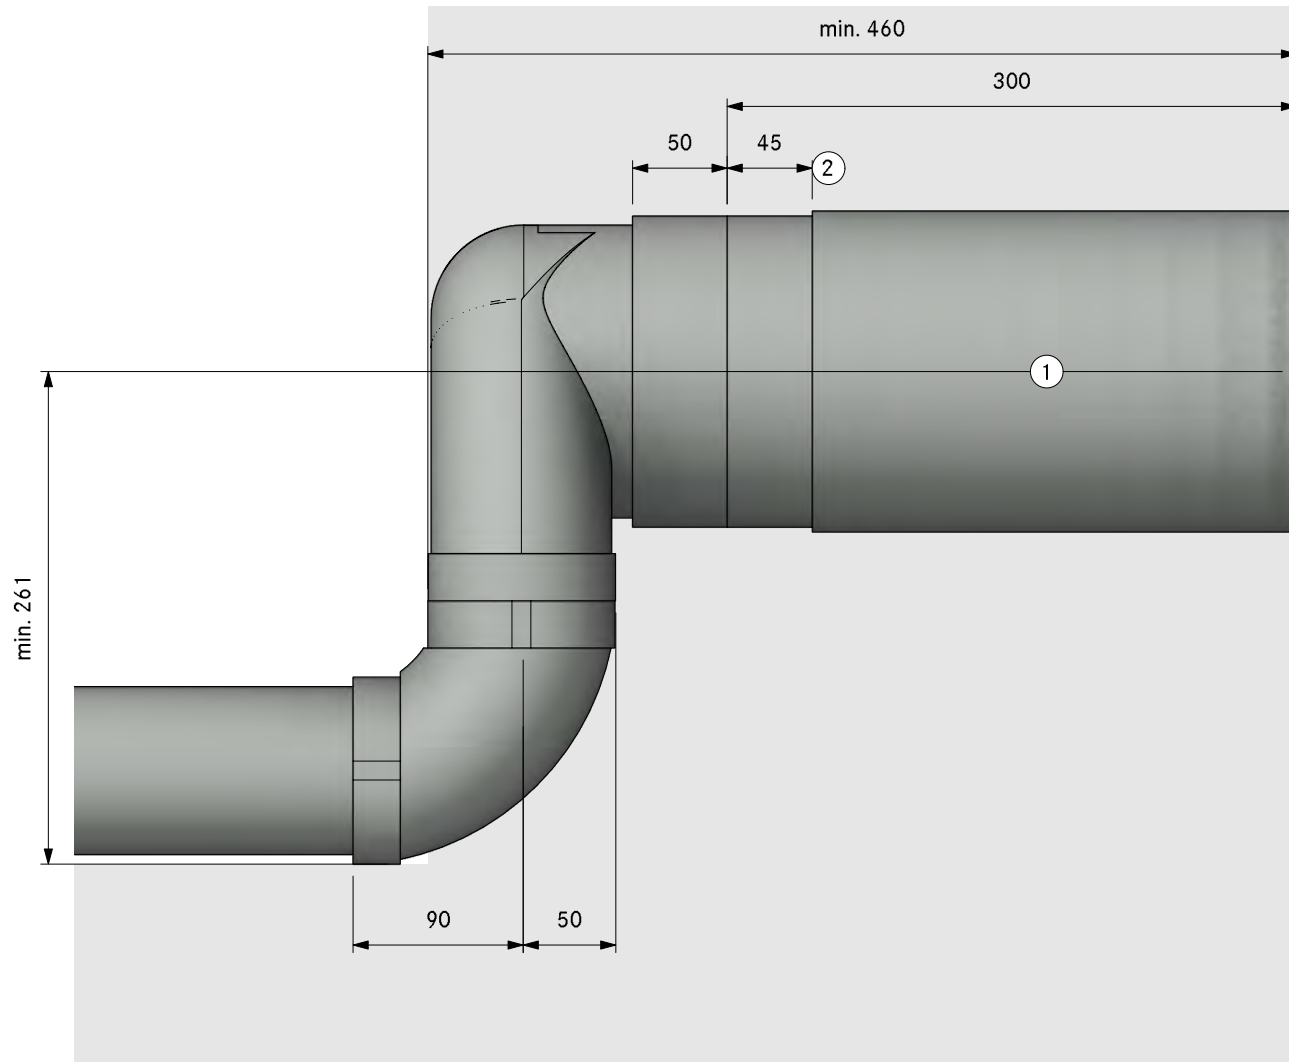


- ①. Hole size min. Ø180mm.  
Wall vent must be able to fully  
open for air to extract
- ②. Bushing length 45mm (can be  
shortened by 20mm)



Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
1	EFBH90	90° bend flat horizontal
2	EFBV90	90° bend flat vertical
3	EFV	duct connection flat
1	UEBF	3box wall sleeve
3	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

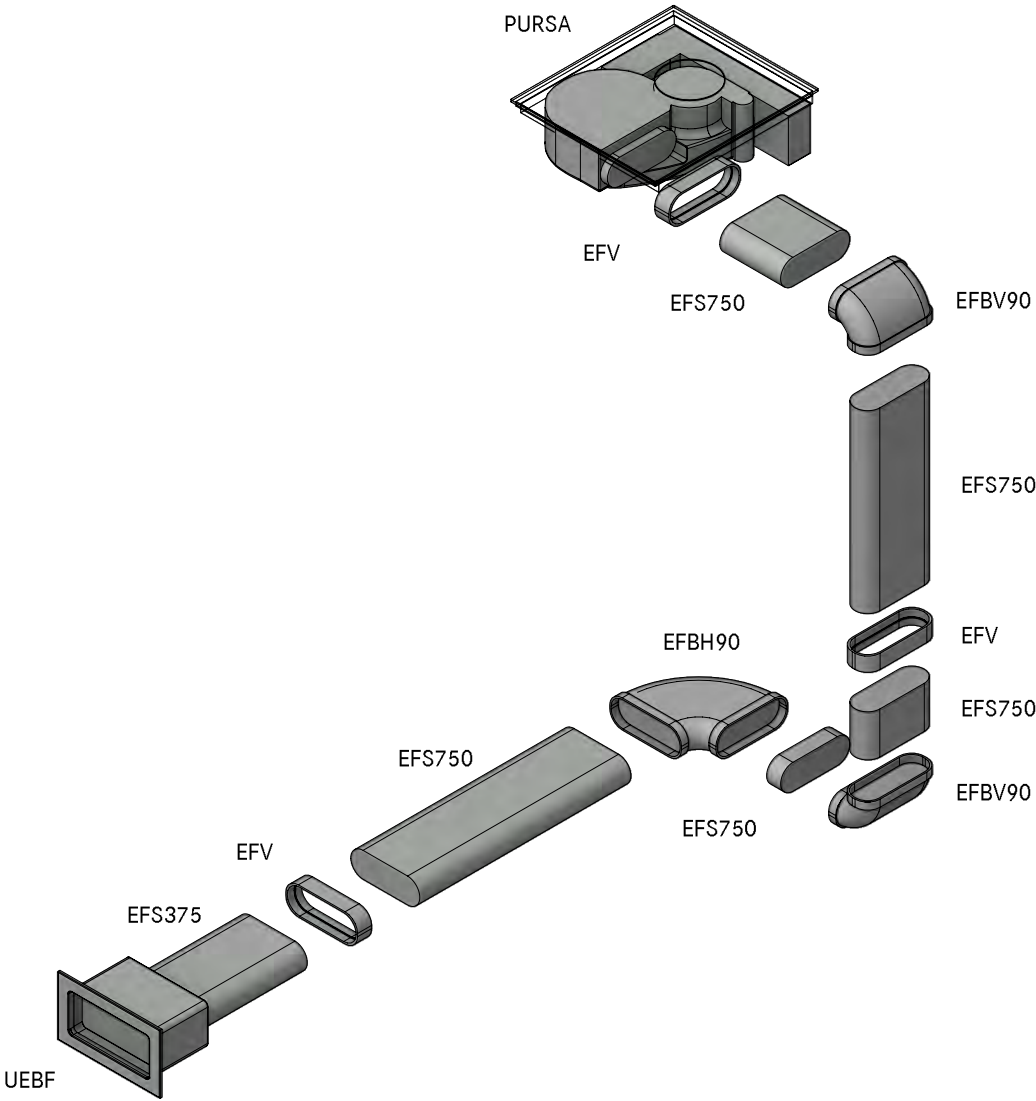

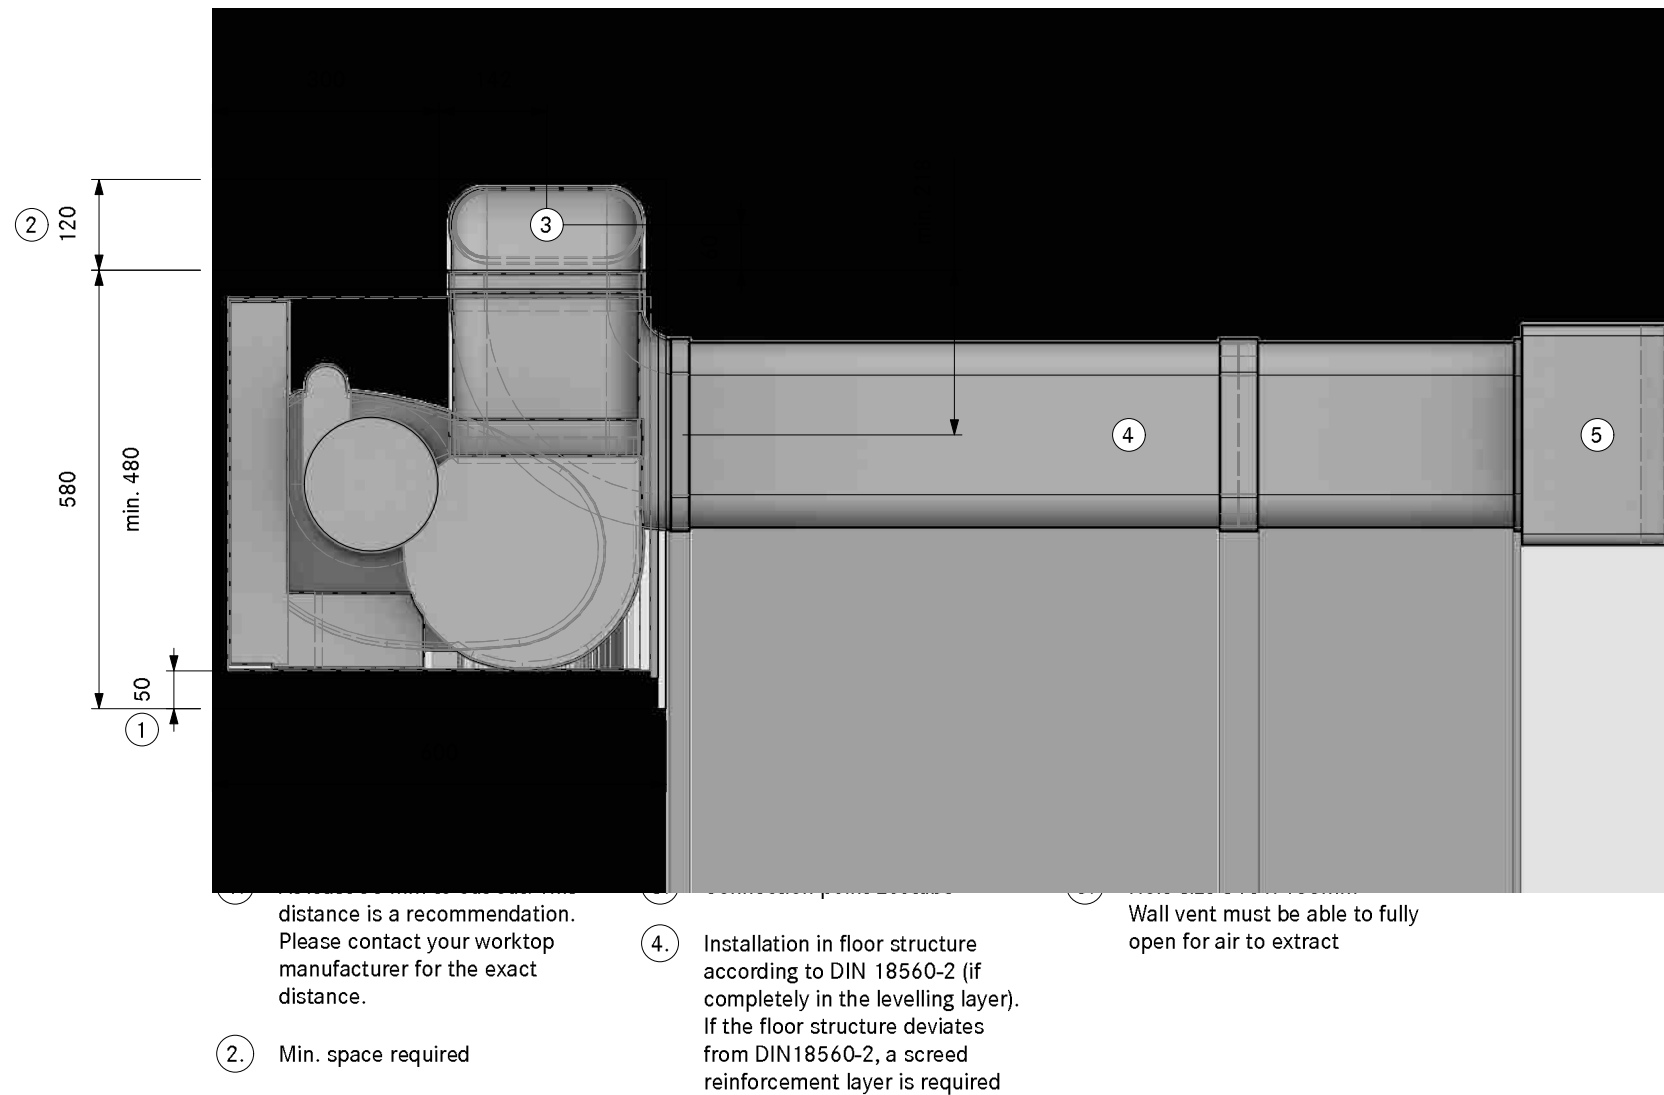


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA30210**  
**SPure Floor right UEBF**

LAYOUT

**SA**

Version, 1.0

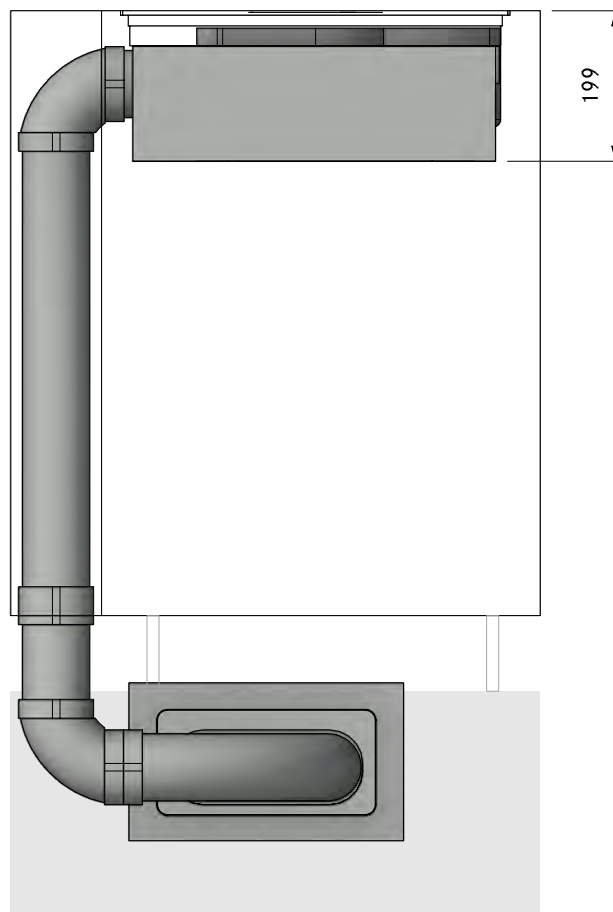


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA30210  
SPure Floor right UEBF

LAYOUT

FA

Version, 1.0

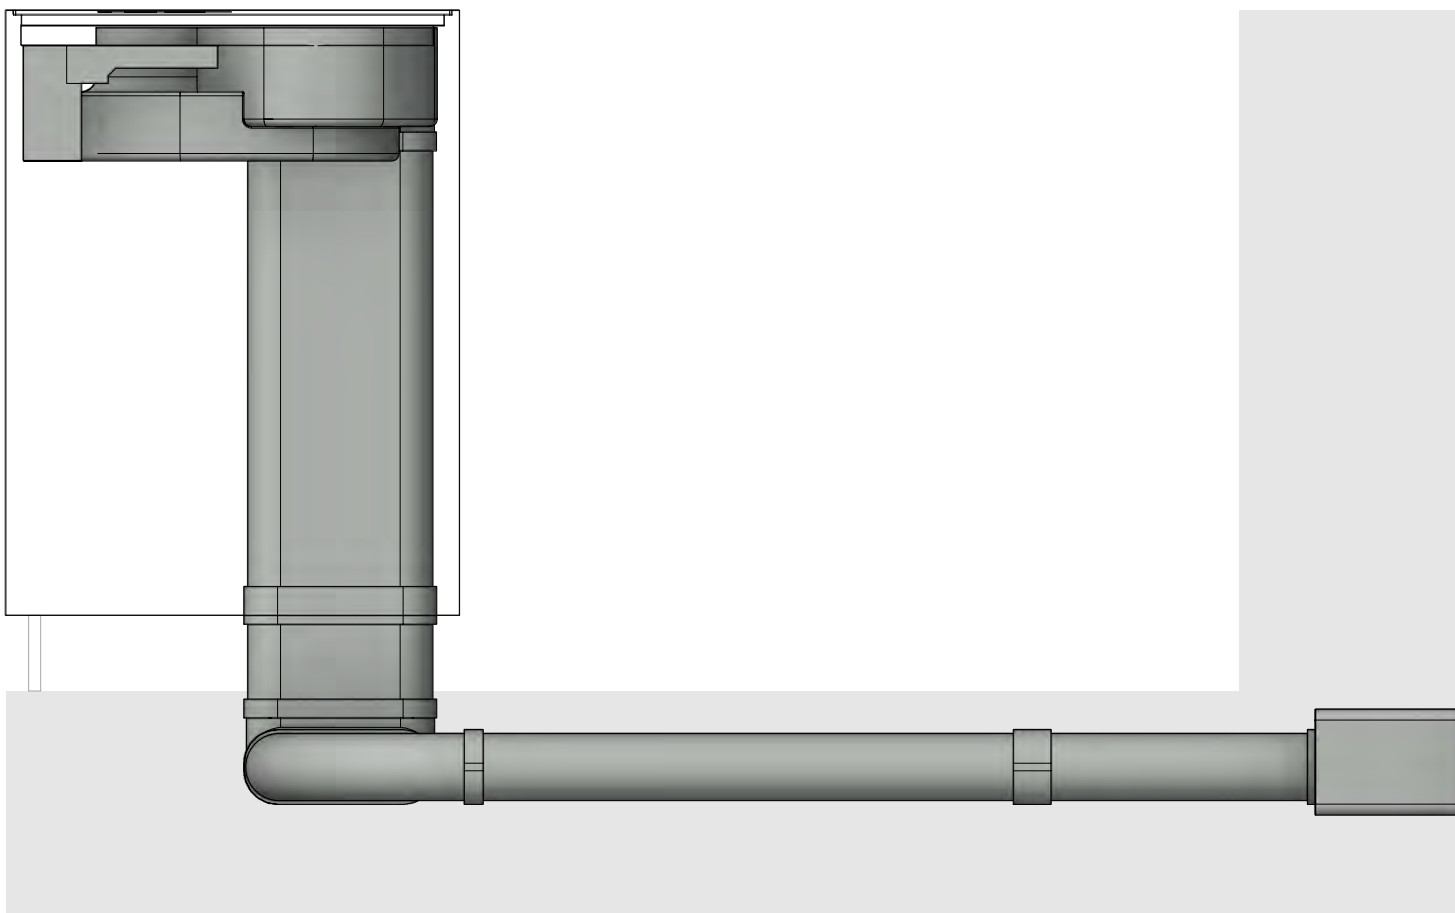


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA30210  
SPure Floor right UEBF

LAYOUT

Detail


Version, 1.0

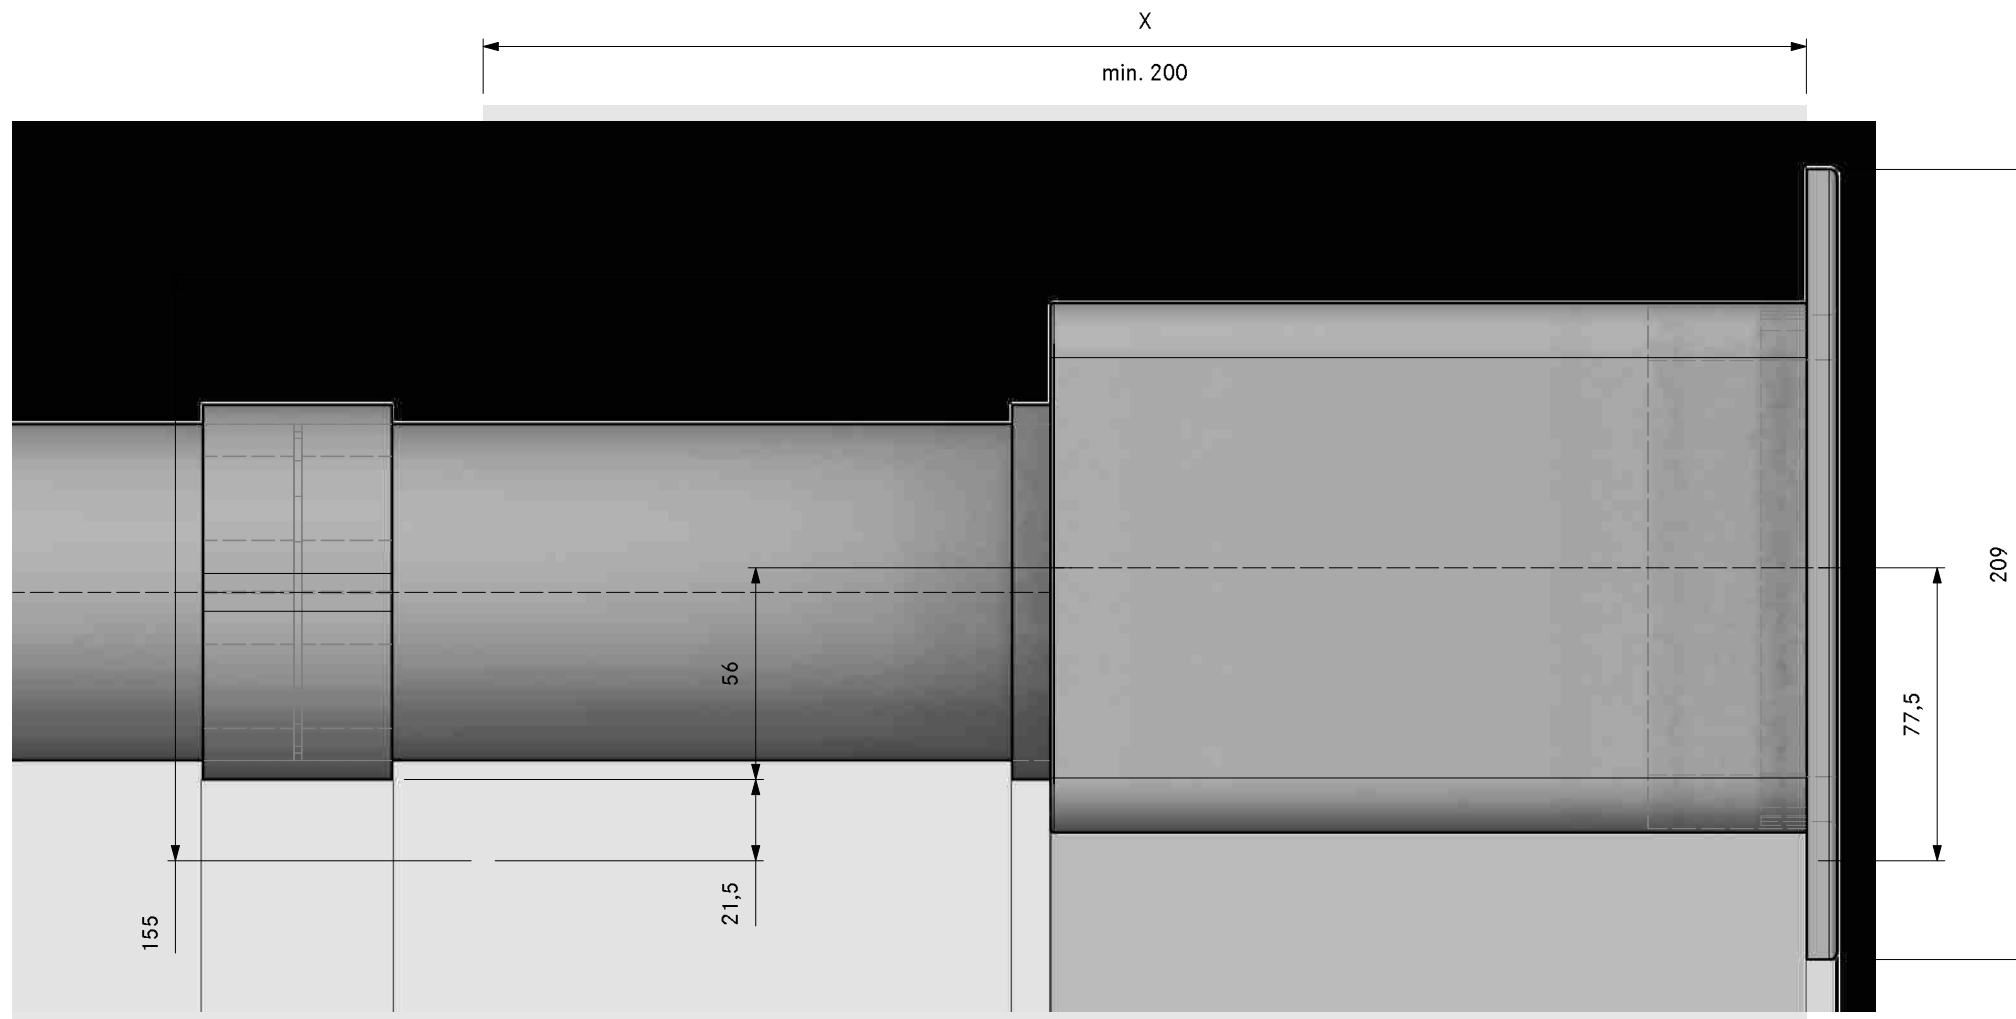






Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
1	EFBH90	90° bend flat horizontal
2	EFBV90	90° bend flat vertical
1	EFRG	bridge flat round straight
2	EFV	duct connection flat
1	UEBR	3box wall sleeve round
1	ER750	round duct 750mm
3	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

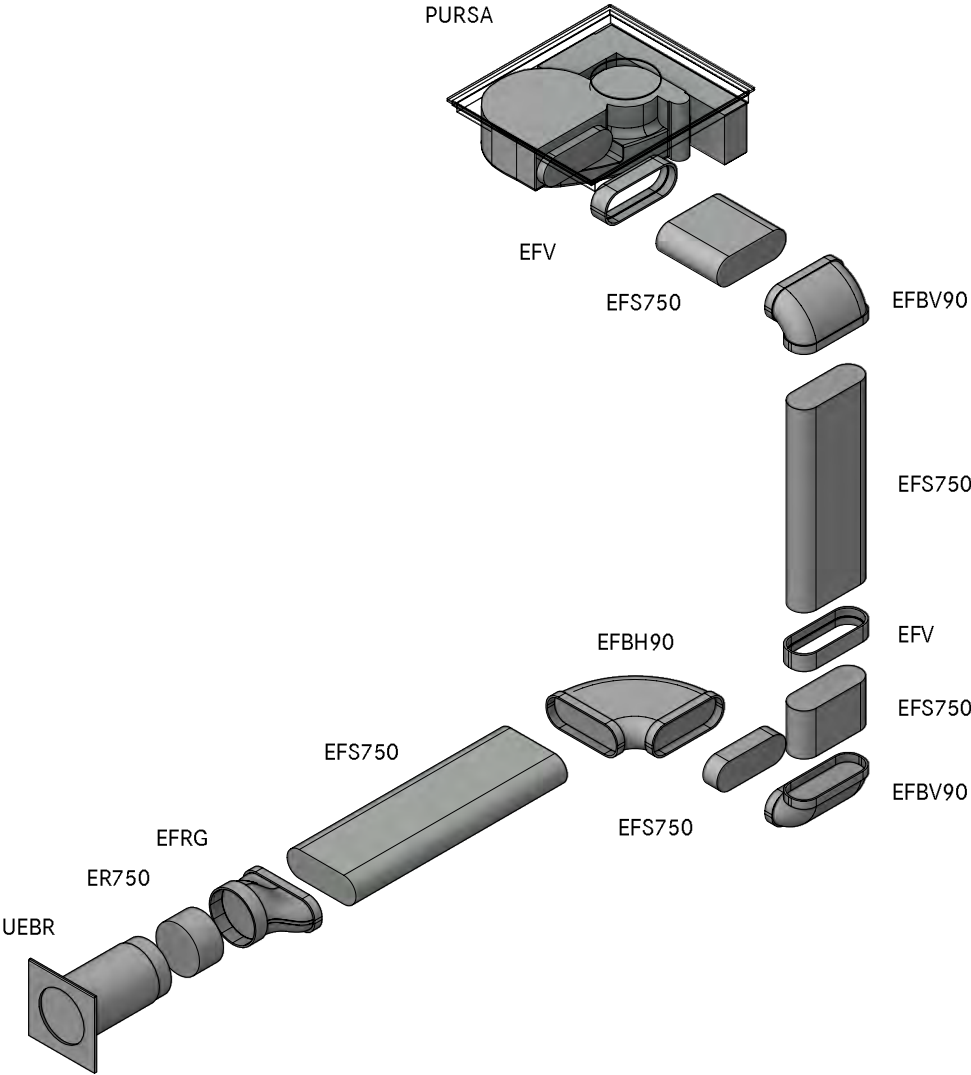

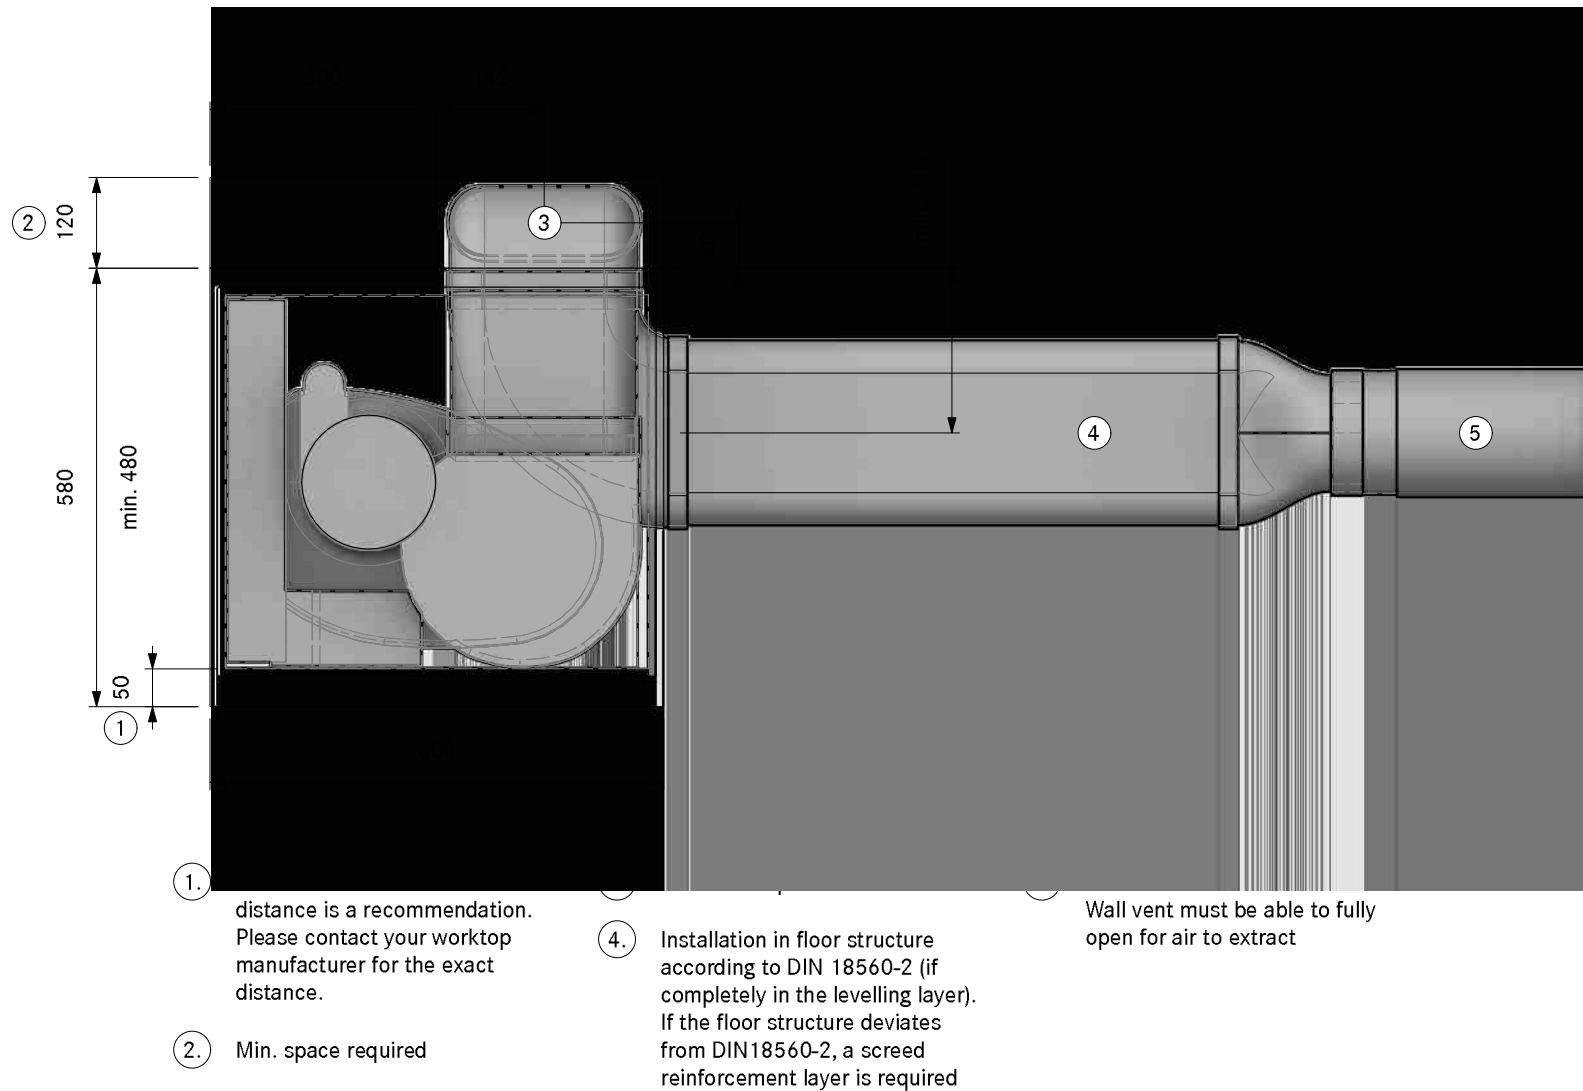


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA30220  
SPure Floor right UEBR

LAYOUT

SA

Version, 1.0

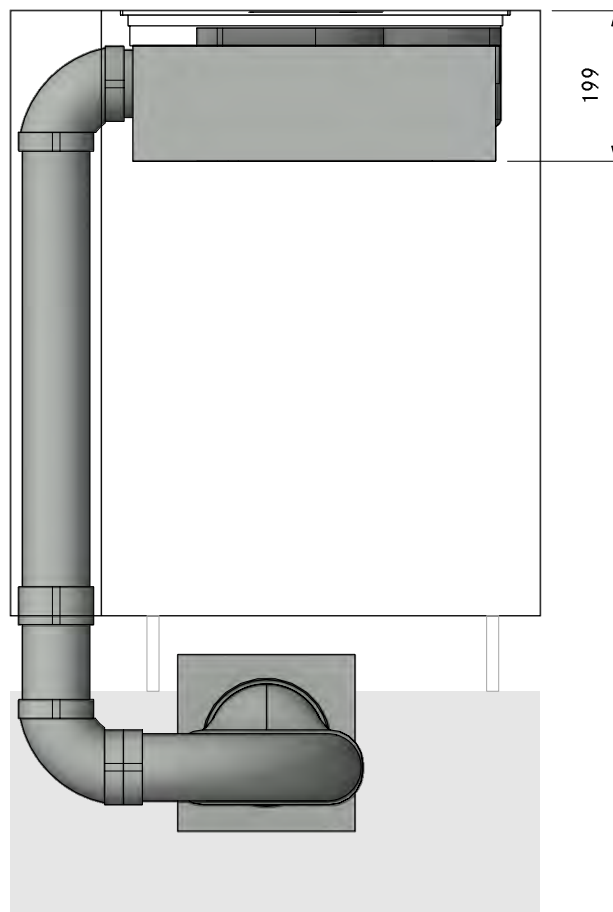


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA30220  
SPure Floor right UEBR

LAYOUT


FA

Version, 1.0


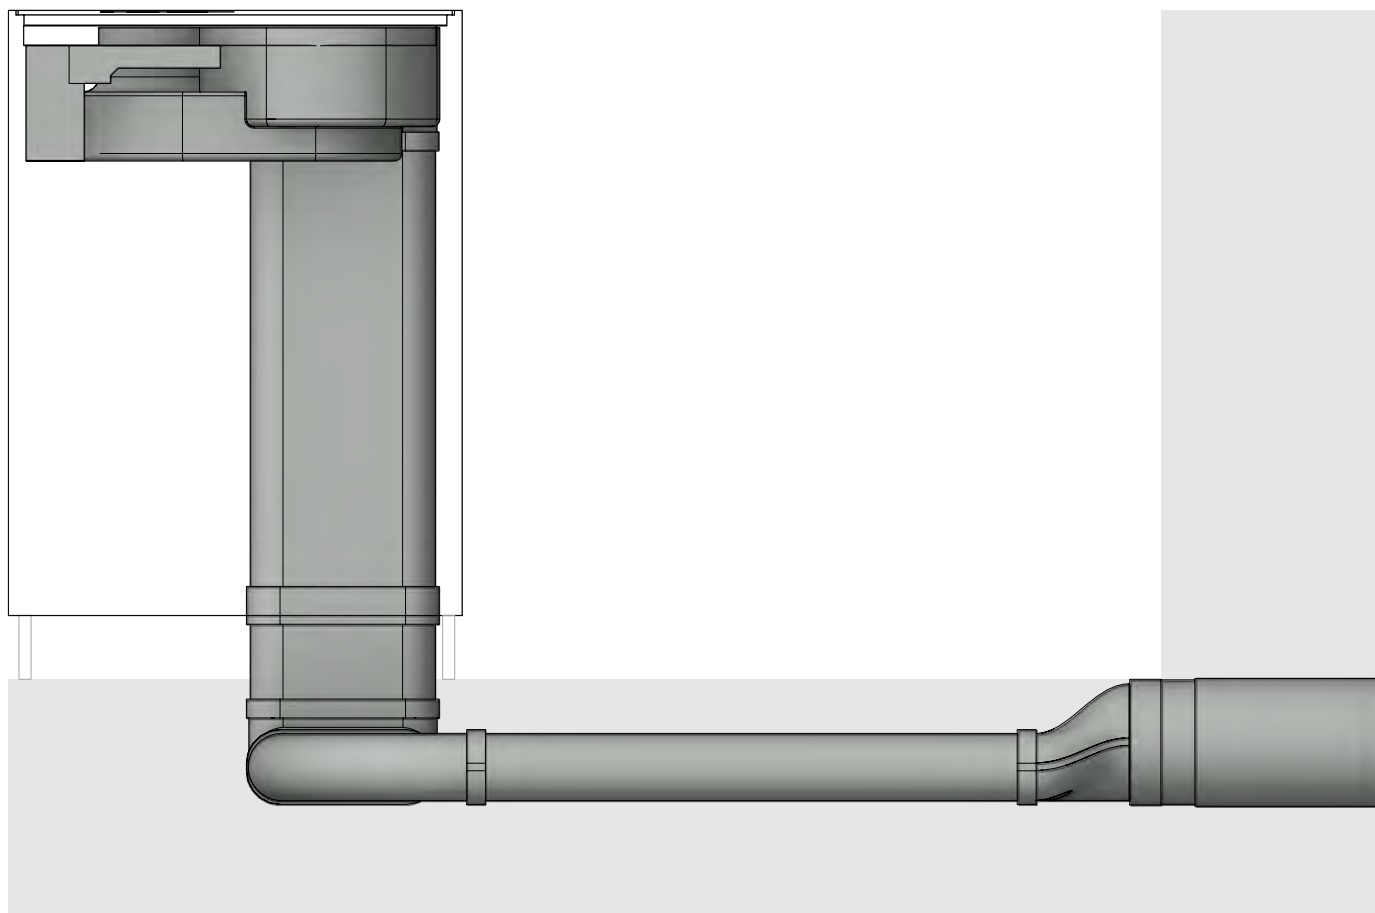


LAYOUT

Detail

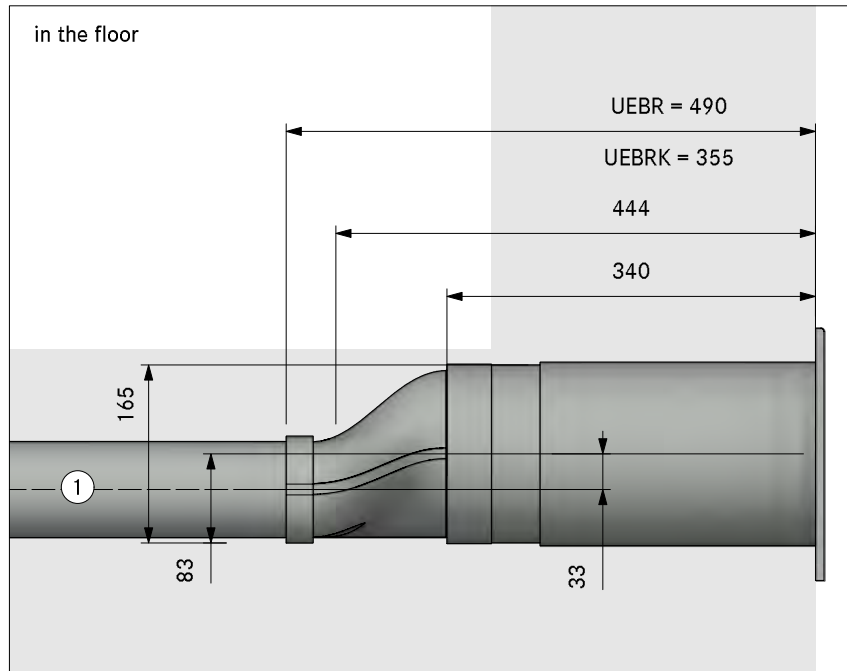


in the plinth area

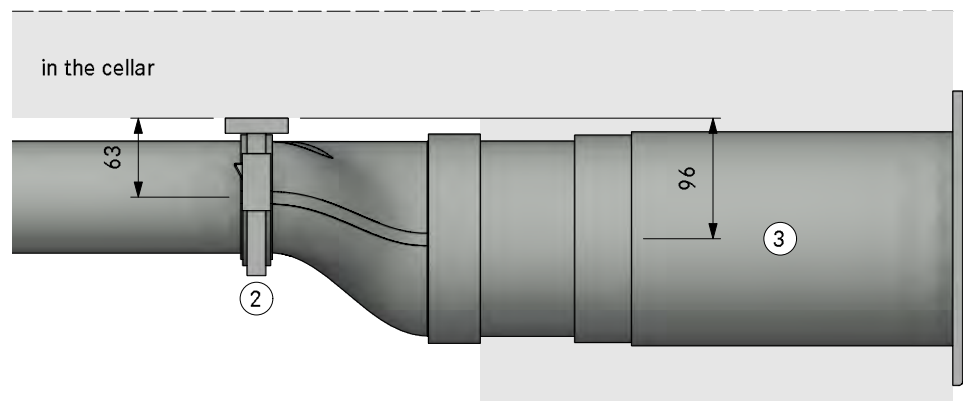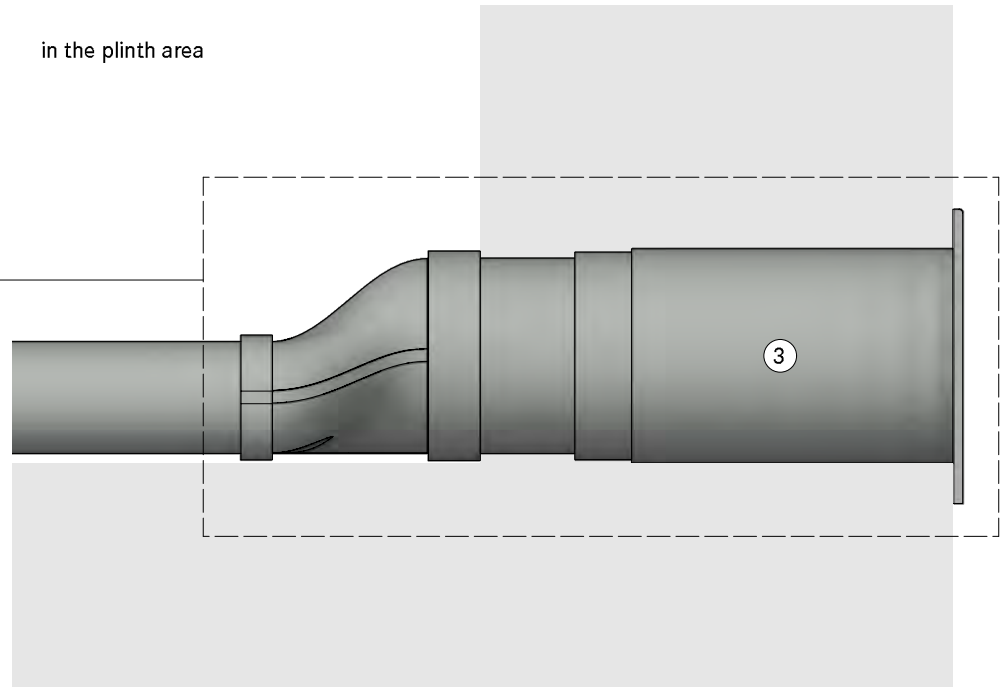


- ①. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
- ②. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
- ③. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract



Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
1	EFBH90	90° bend flat horizontal
4	EFBV90	90° bend flat vertical
2	EFV	duct connection flat
1	UEBF	3box wall sleeve
3	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

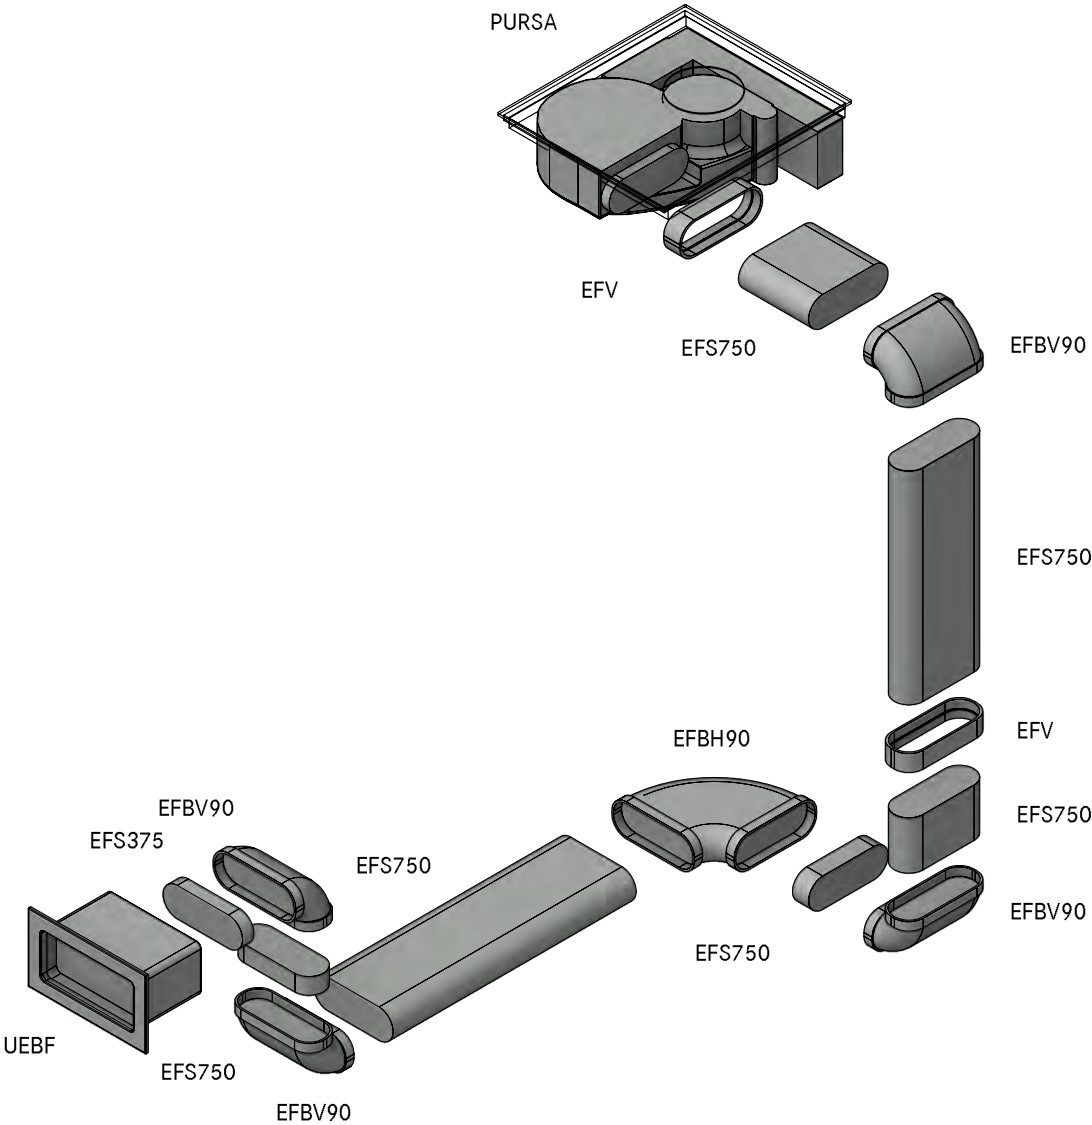



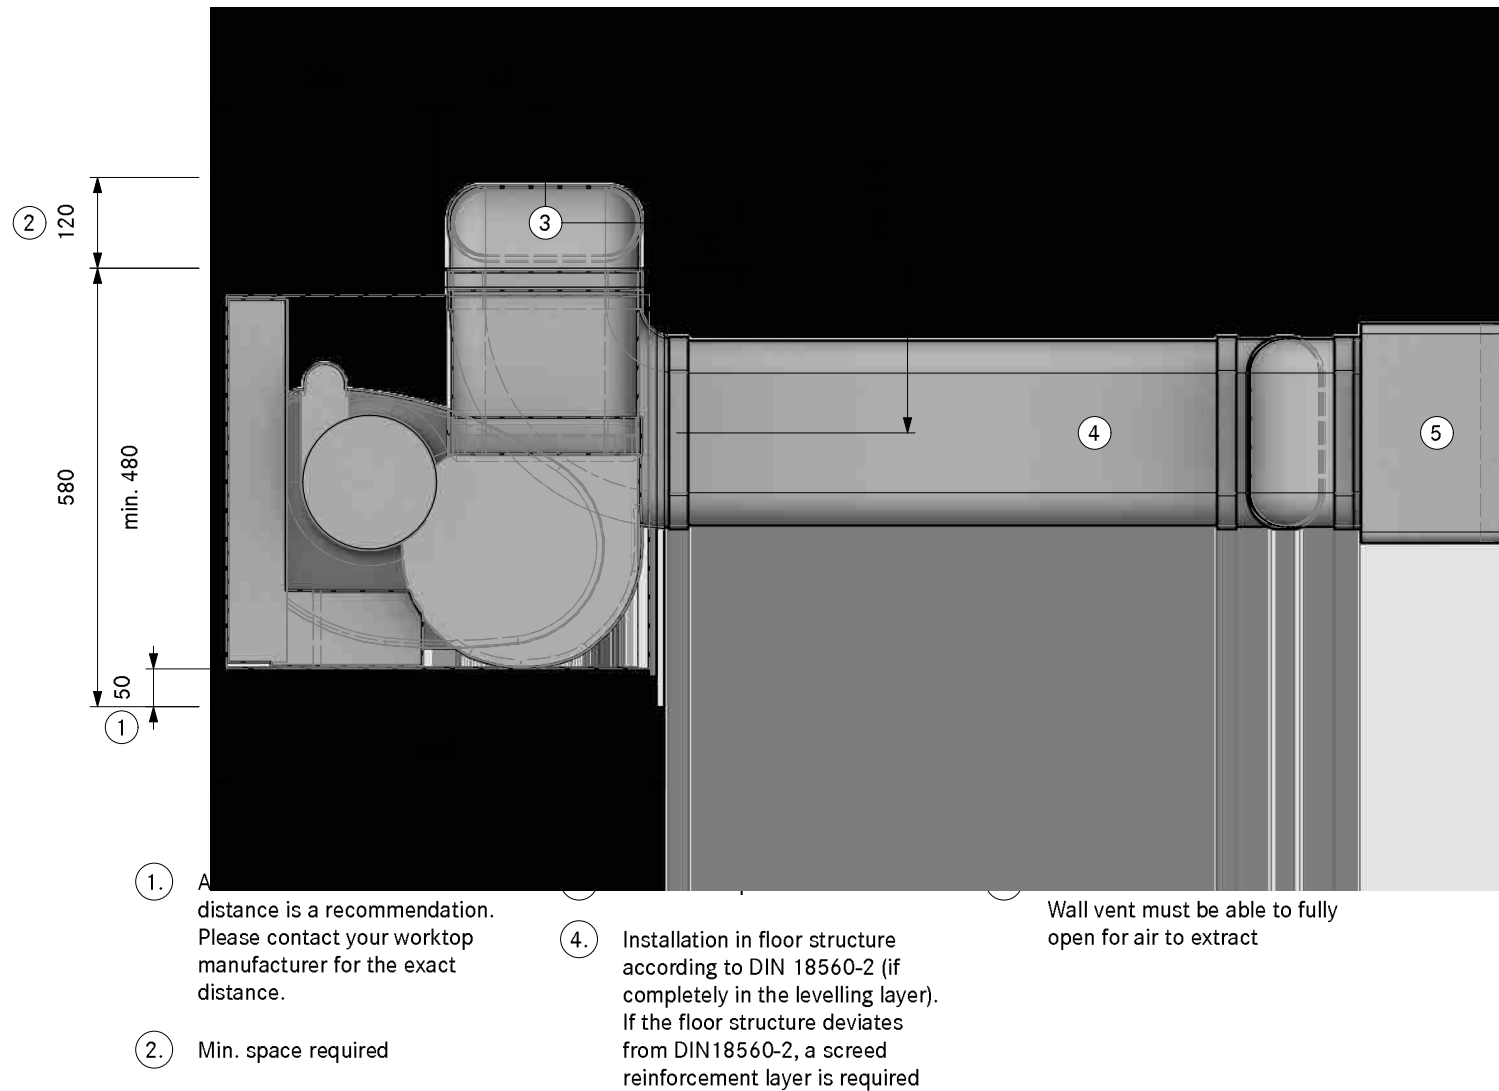


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA30230**  
**SPure Floor right swan neck UEBF**

LAYOUT

**SA**

Version, 1.0

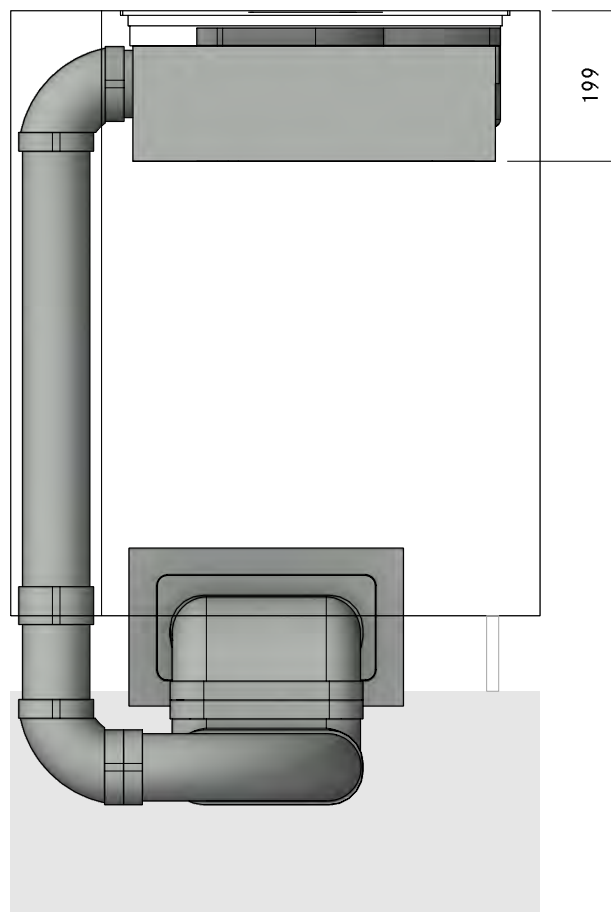


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


SPA30230  
SPure Floor right swan neck UEBF

LAYOUT

FA

Version, 1.0

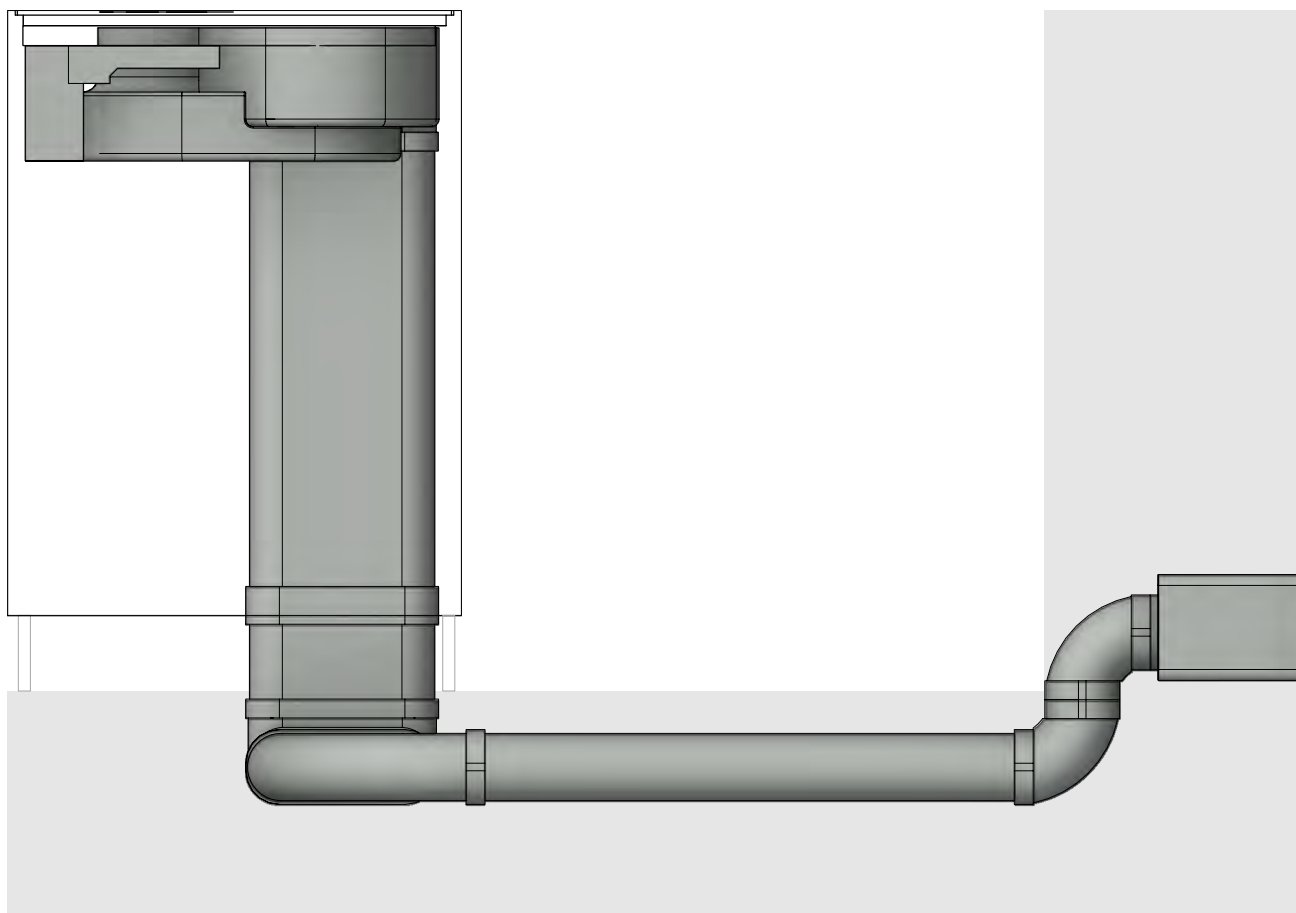


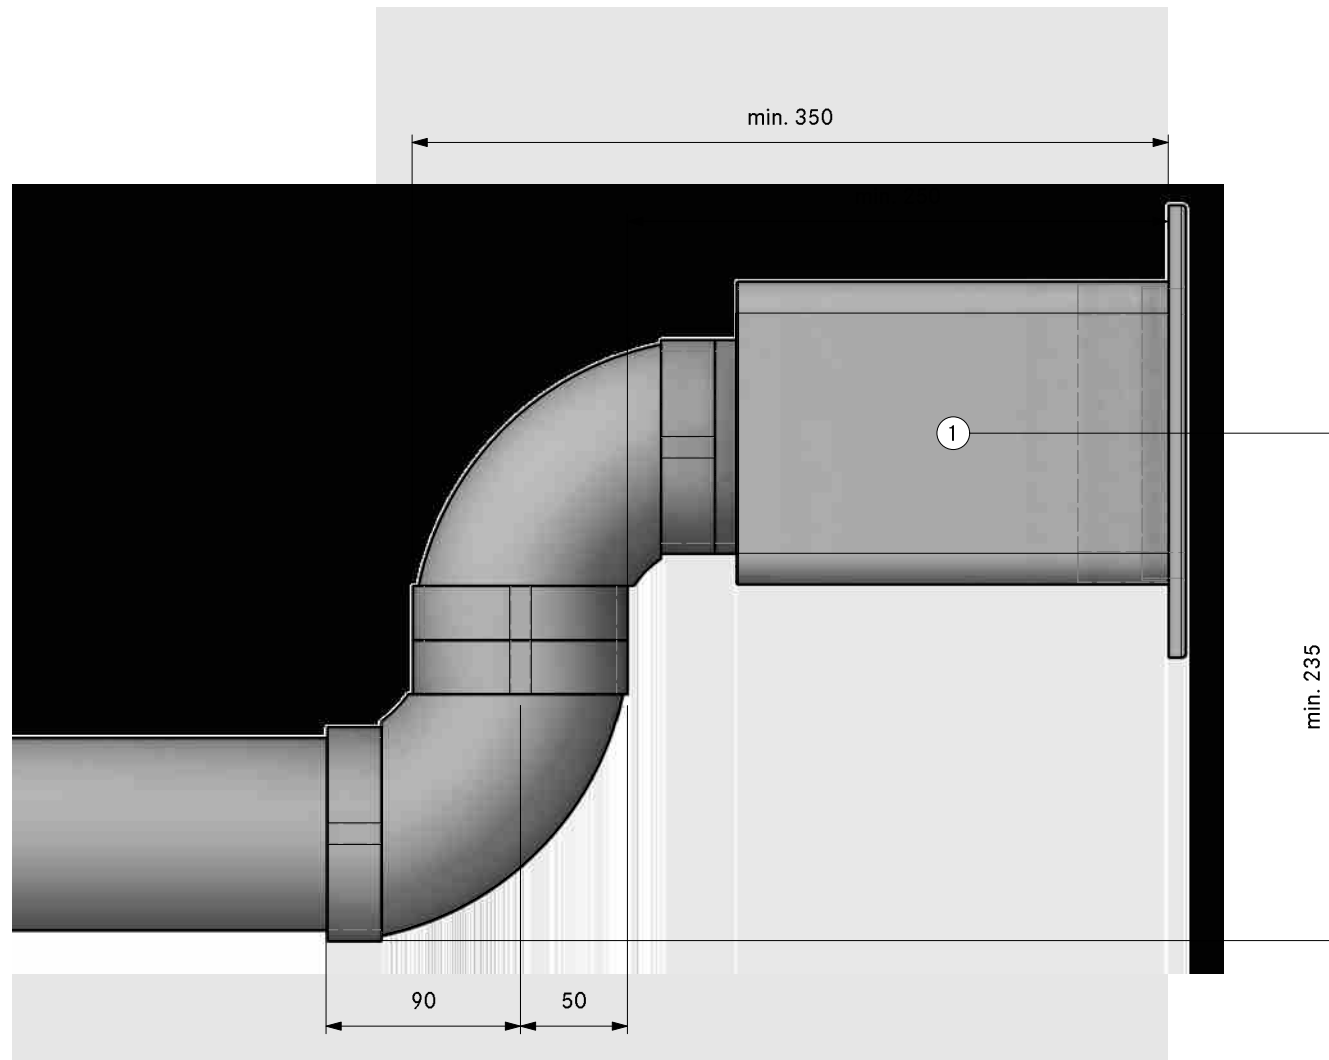


1. Hole size 310 x 155mm  
Wall vent must be able to fully  
open for air to extract



Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
1	EFBH90	90° bend flat horizontal
3	EFBV90	90° bend flat vertical
1	EFR90	transition flat round 90°
2	EFV	duct connection flat
1	ERV	duct connection round
1	UEBR	3box wall sleeve round
1	ER750	round duct 750mm
3	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

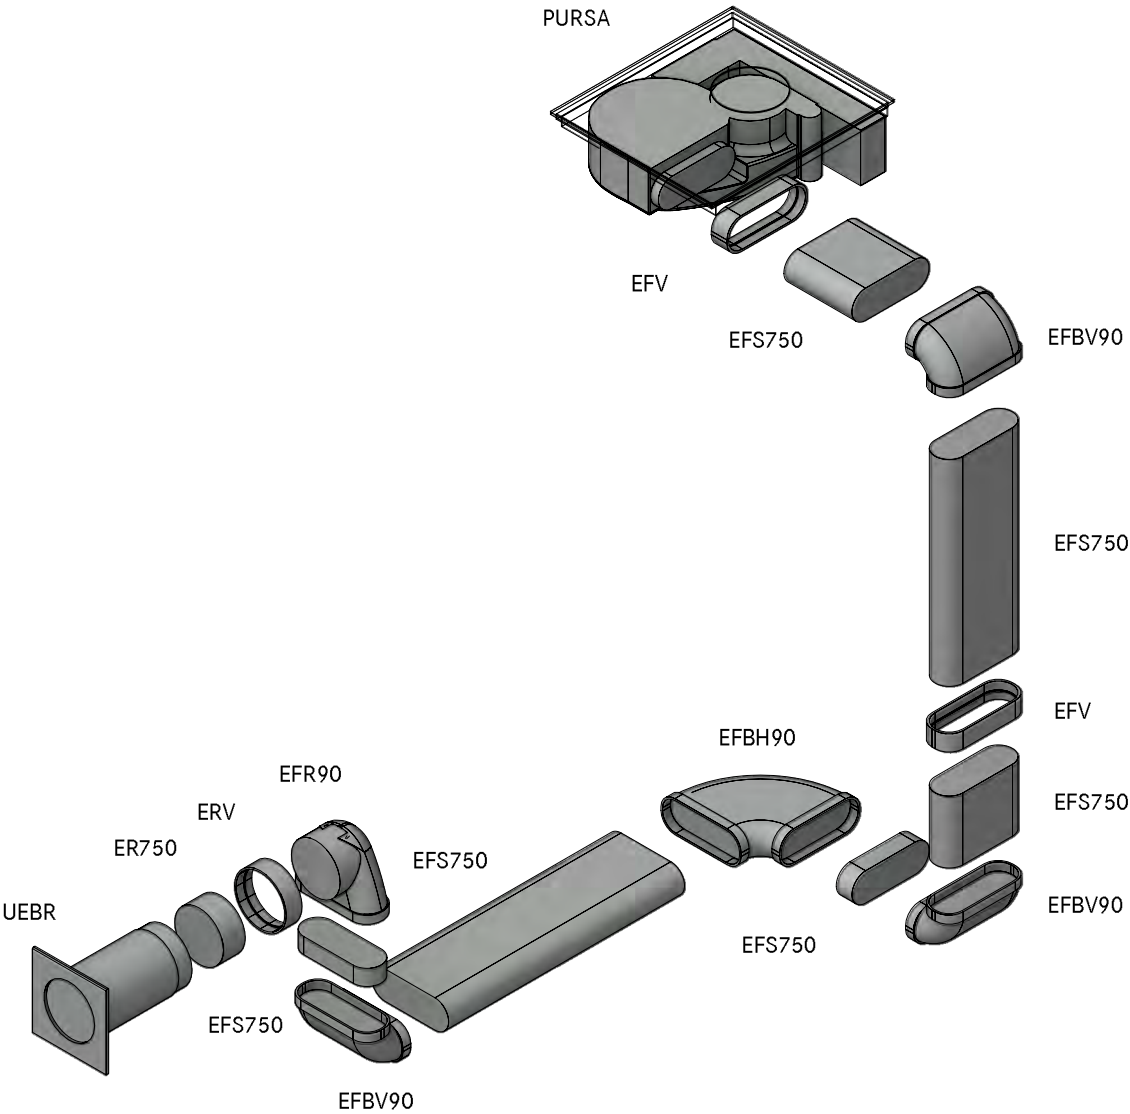

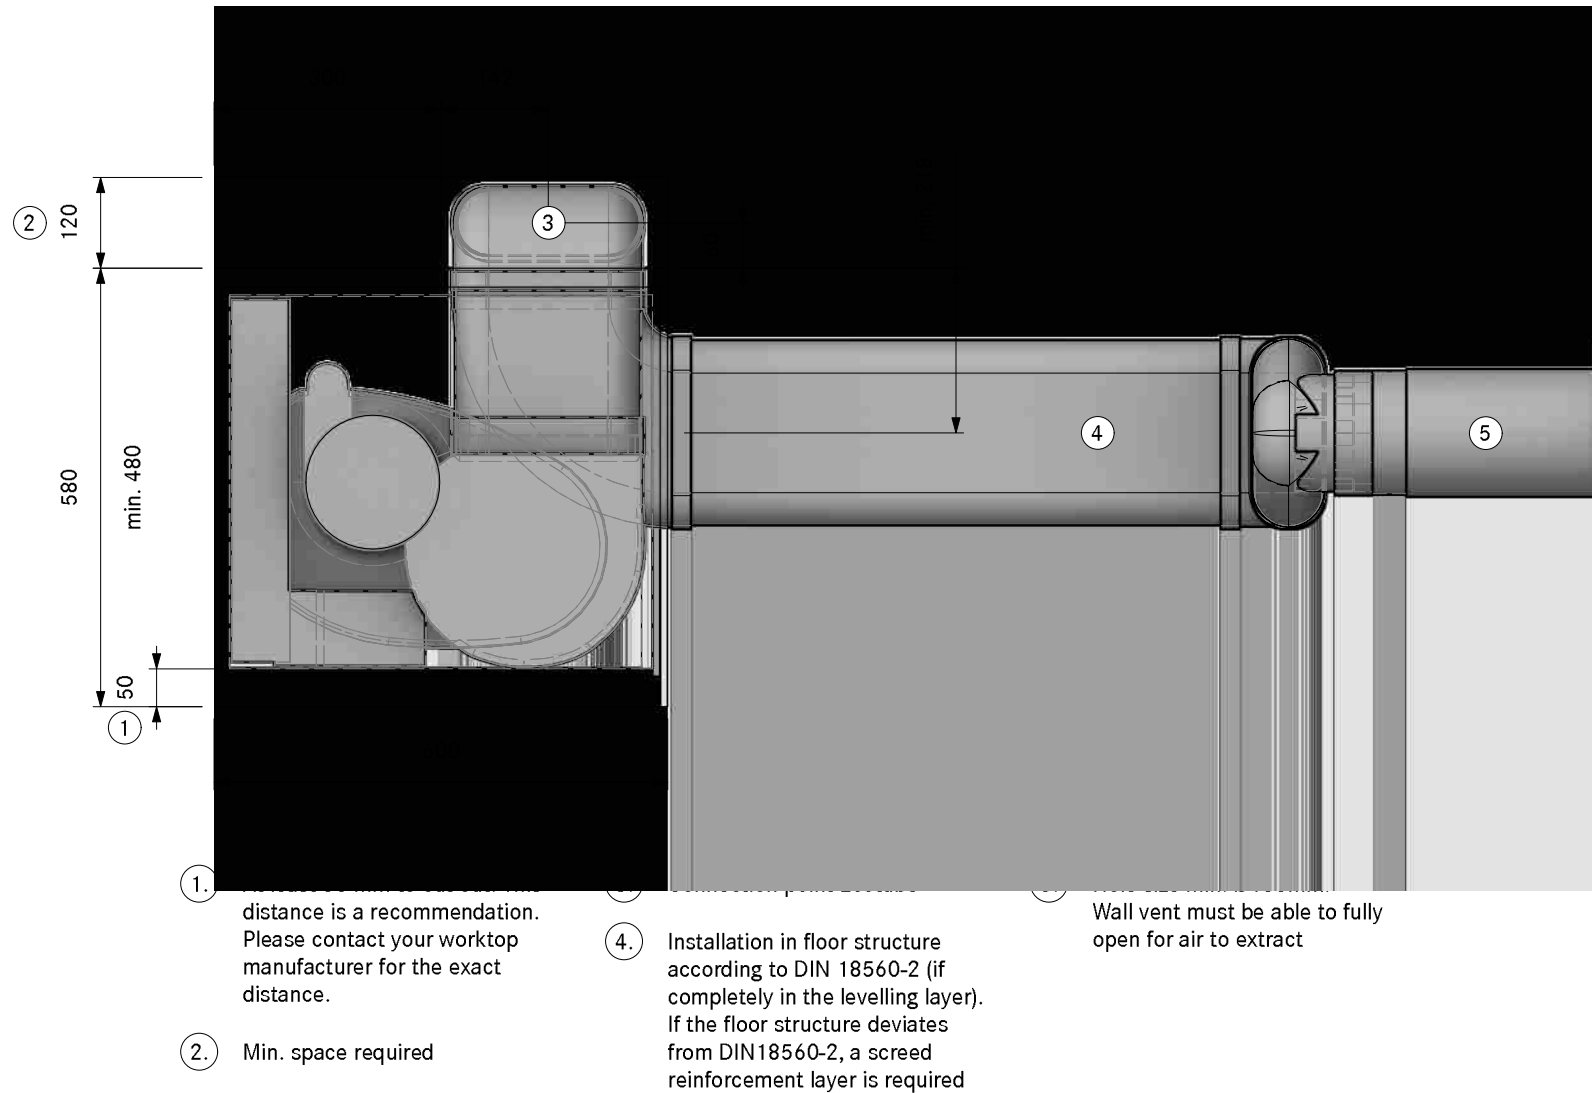


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA30240**  
**SPure Floor right swan neck UEBR**

LAYOUT

**SA**

Version, 1.0

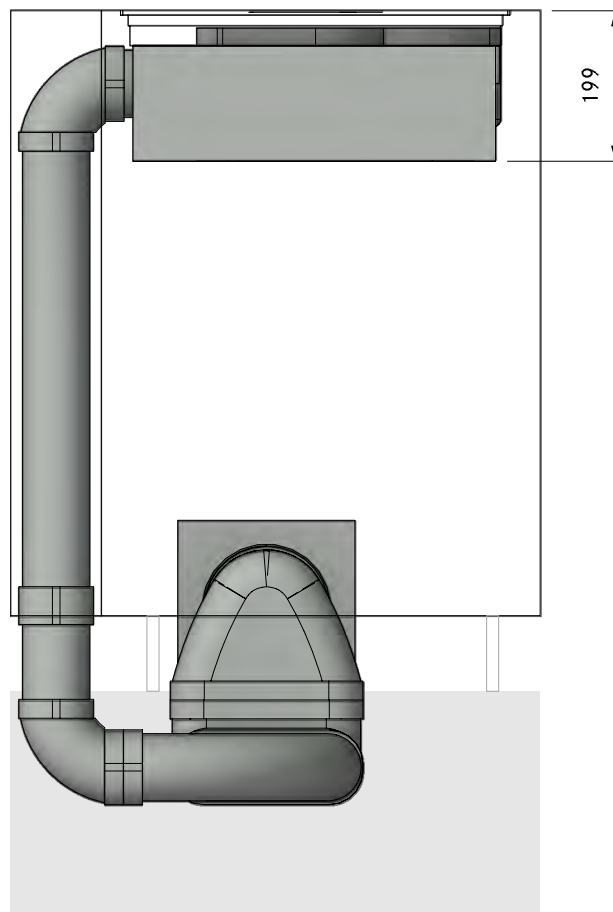




MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA30240**  
**SPure Floor right swan neck UEBR**

LAYOUT

FA


Version, 1.0

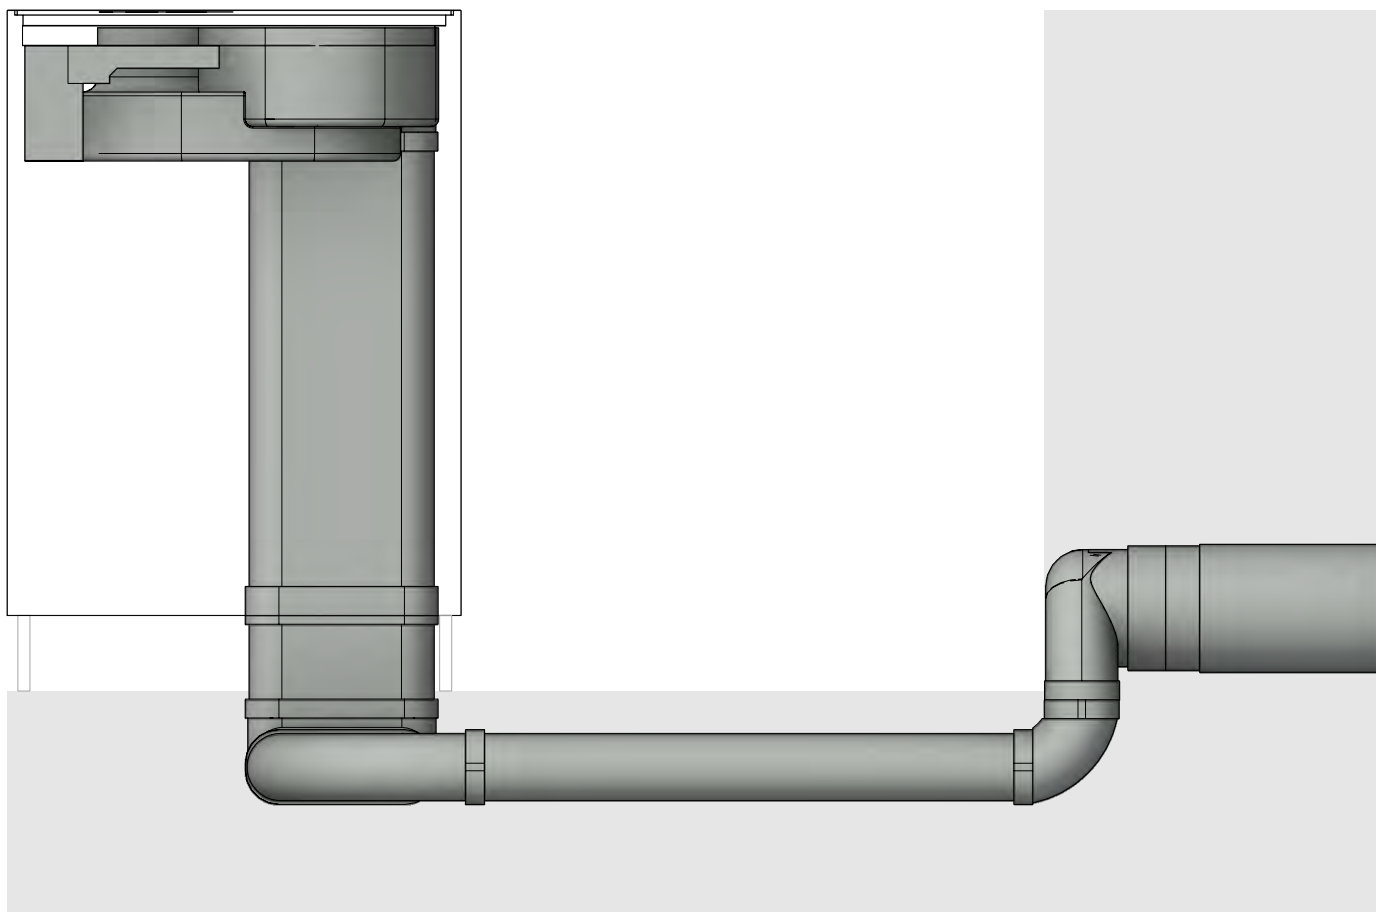

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


SPA30240  
SPure Floor right swan neck UEBR

Version, 1.0



LAYOUT


Detail

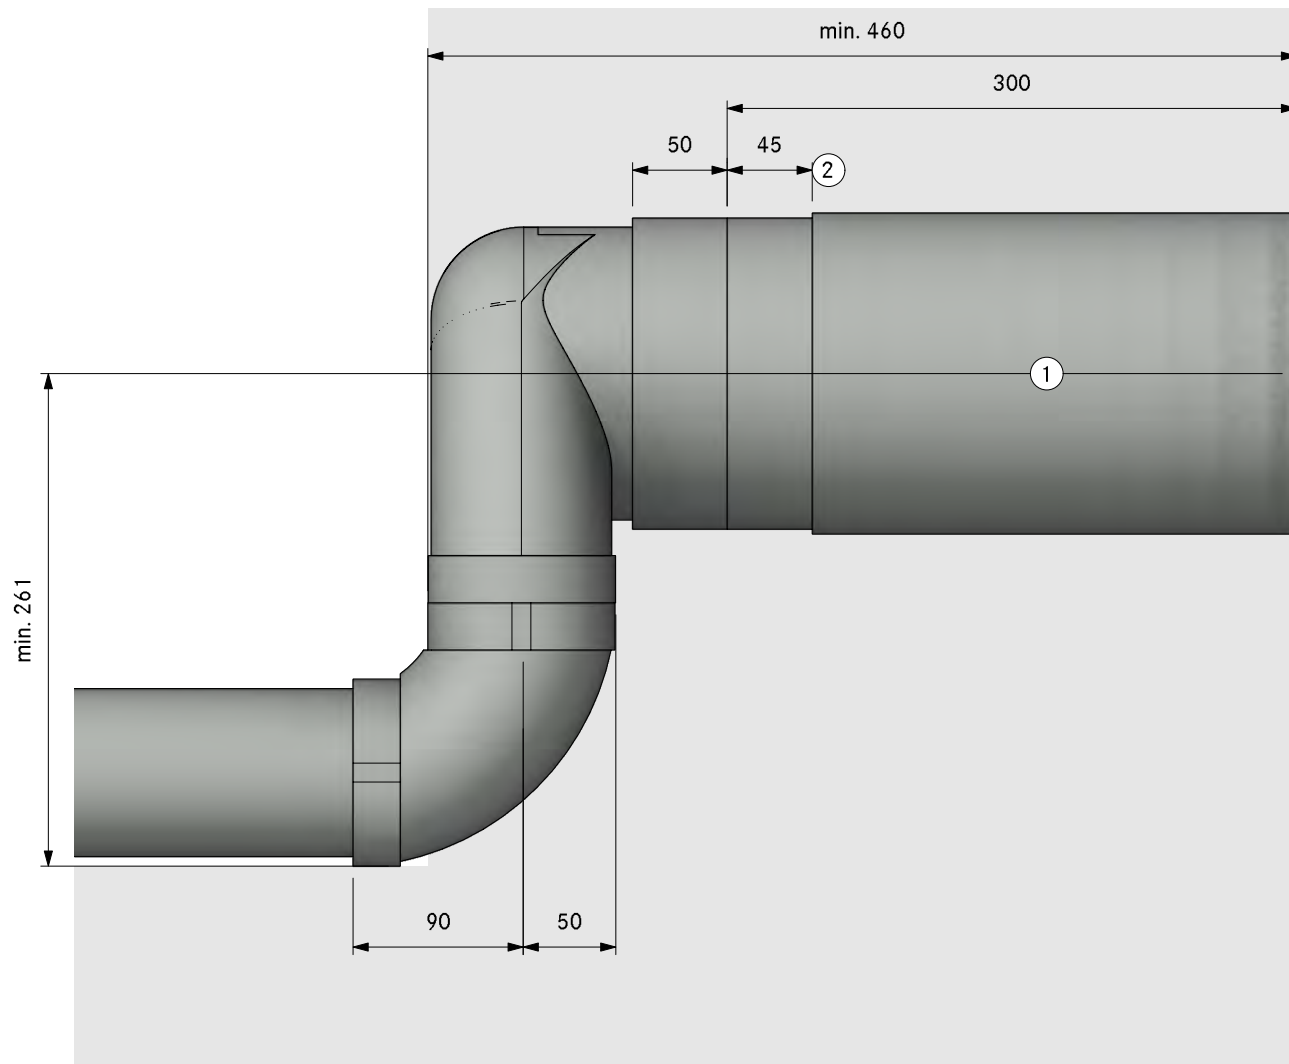


- ①. Hole size min. Ø180mm.  
Wall vent must be able to fully  
open for air to extract
- ②. Bushing length 45mm (can be  
shortened by 20mm)



Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
	Item BORA Ecotube	
2	EFBV90	90° bend flat vertical
3	EFV	duct connection flat
1	UEBF	3box wall sleeve
3	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

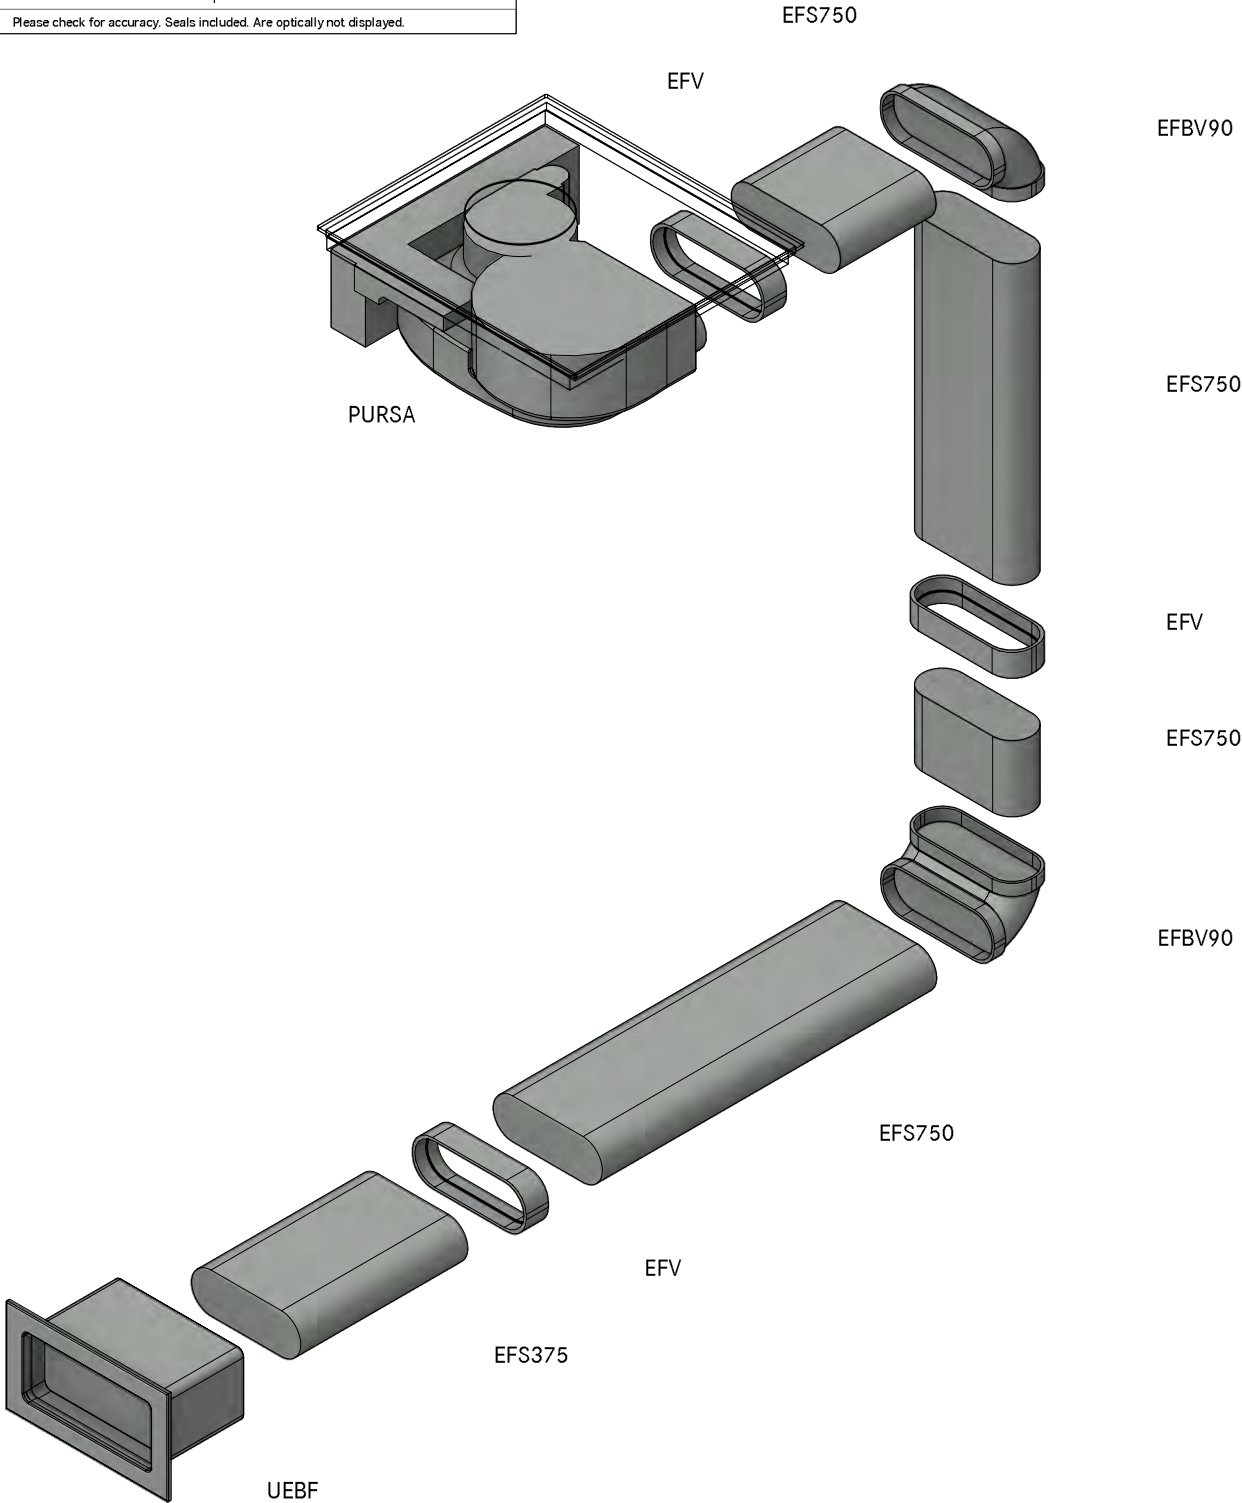

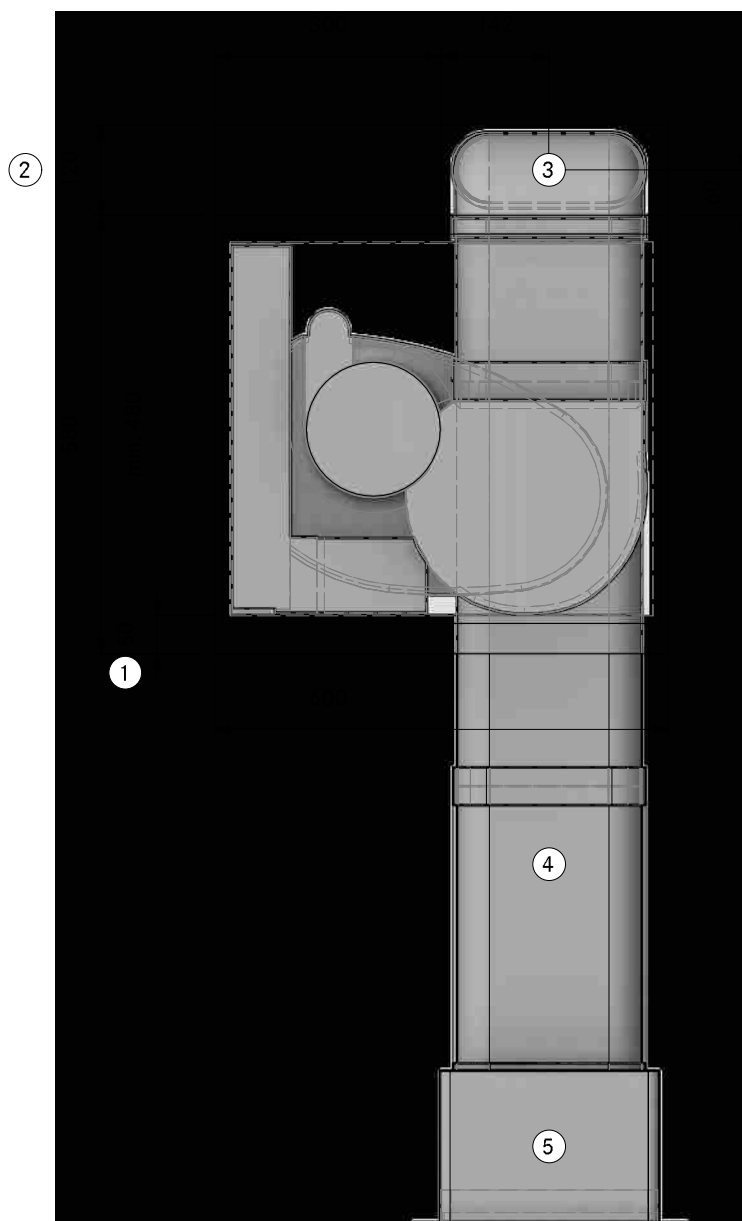

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.

2. Min. space required

3. Connection point Ecotube

4. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN 18560-2, a screed reinforcement layer is required

5. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA30310**  
**SPure Floor front UEBF**

LAYOUT

**SA**

Version, 1.0

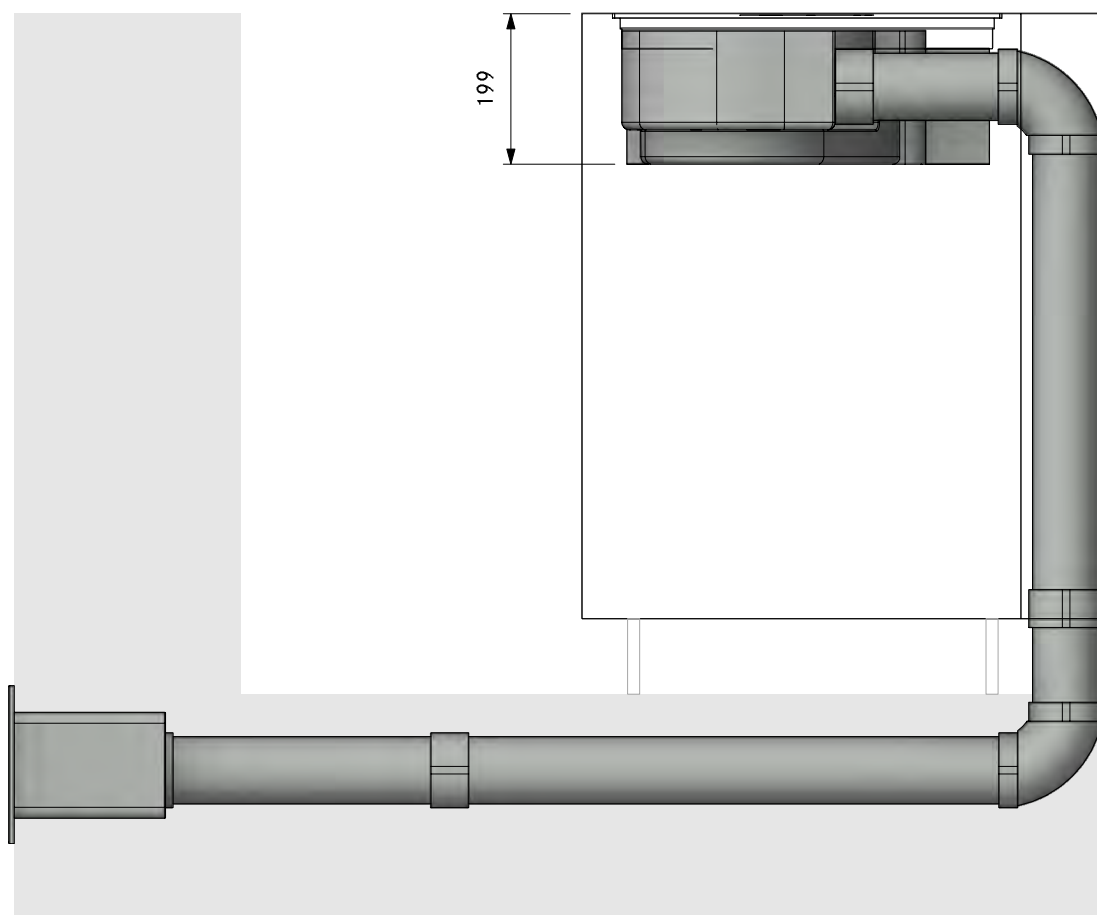

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


**SPA30310**  
**SPure Floor front UEBF**

Version, 1.0



LAYOUT

FA

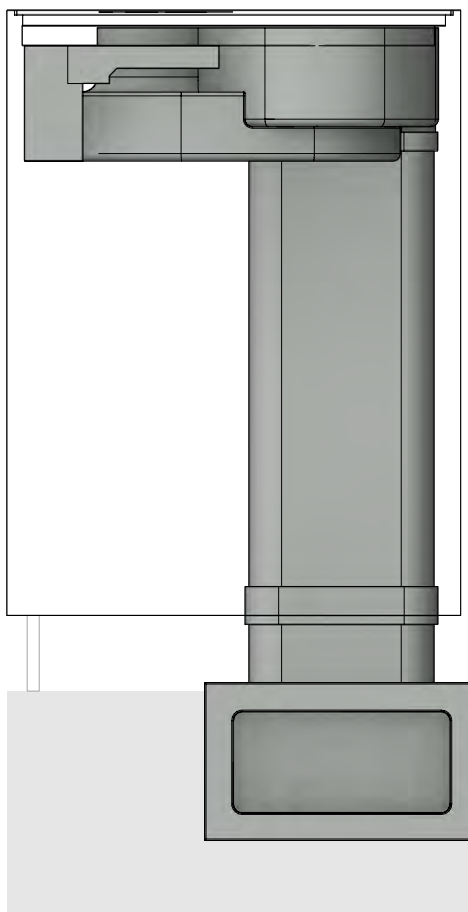


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA30310  
SPure Floor front UEBF

LAYOUT

Detail


Version, 1.0

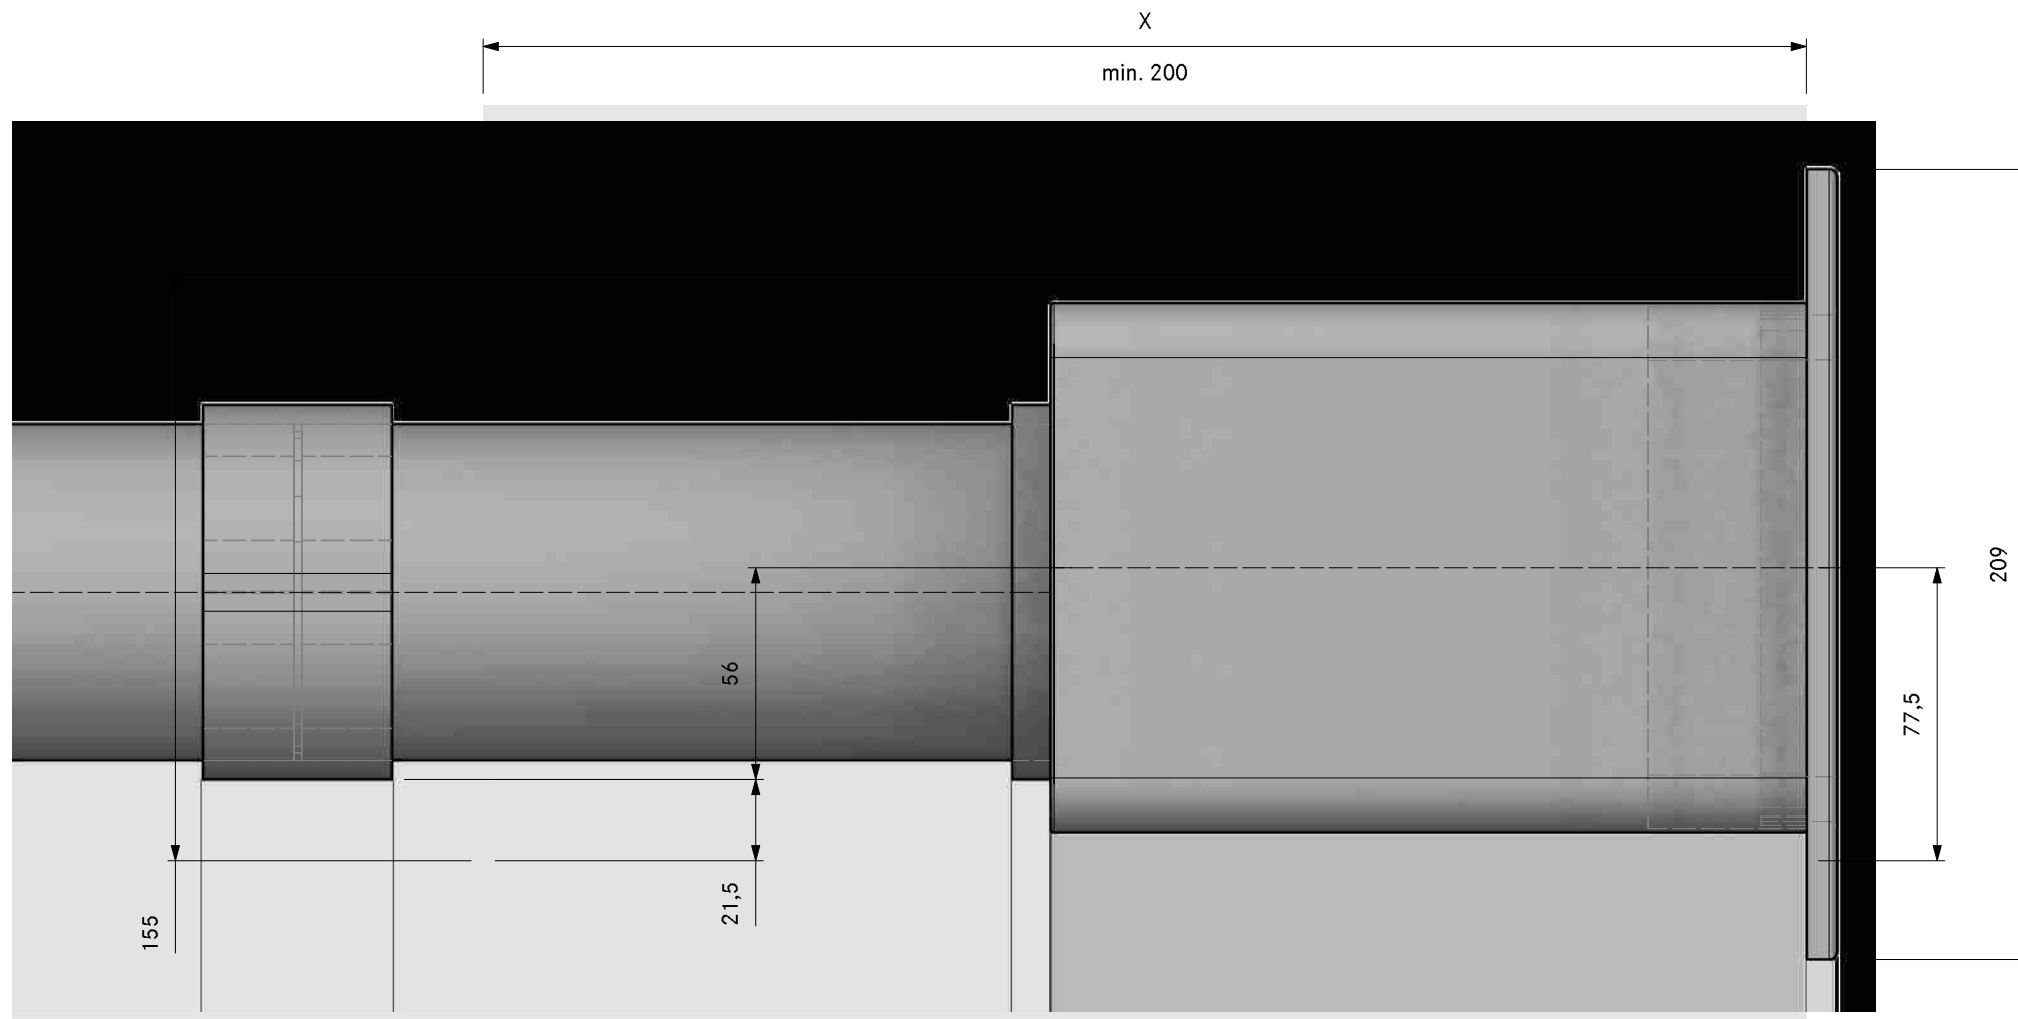






Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
2	EFBV90	90° bend flat vertical
1	EFRG	bridge flat round straight
2	EFV	duct connection flat
1	UEBR	3box wall sleeve round
1	ER750	round duct 750mm
3	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

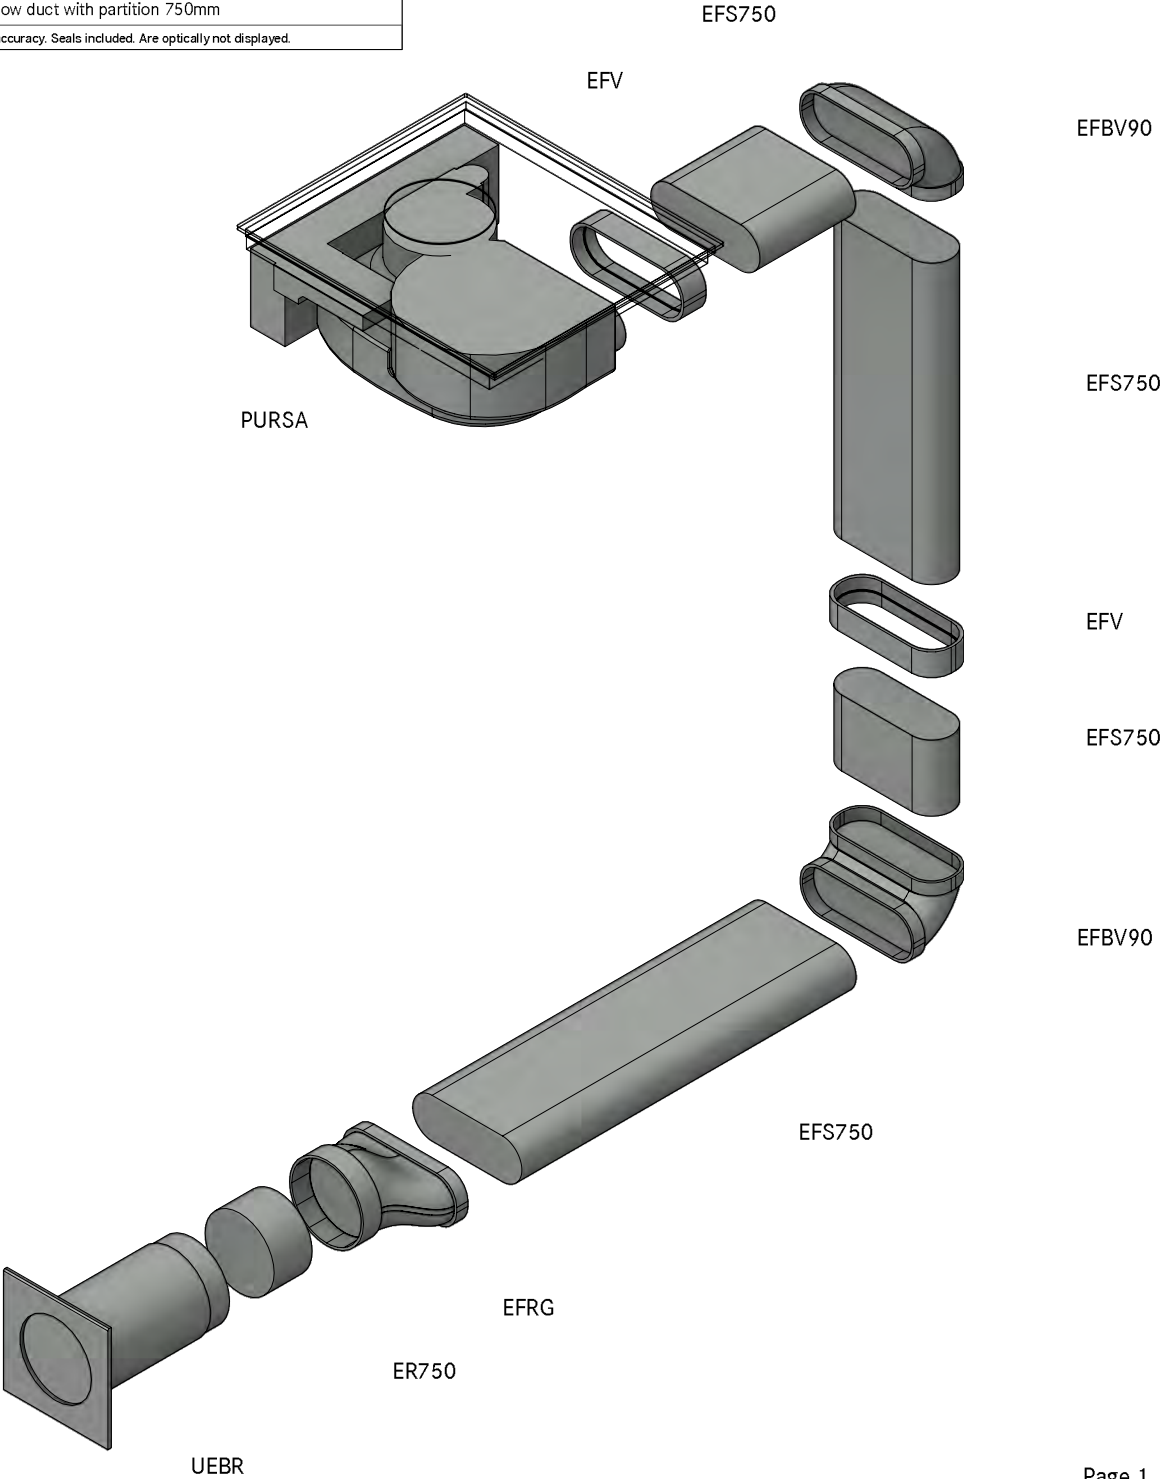

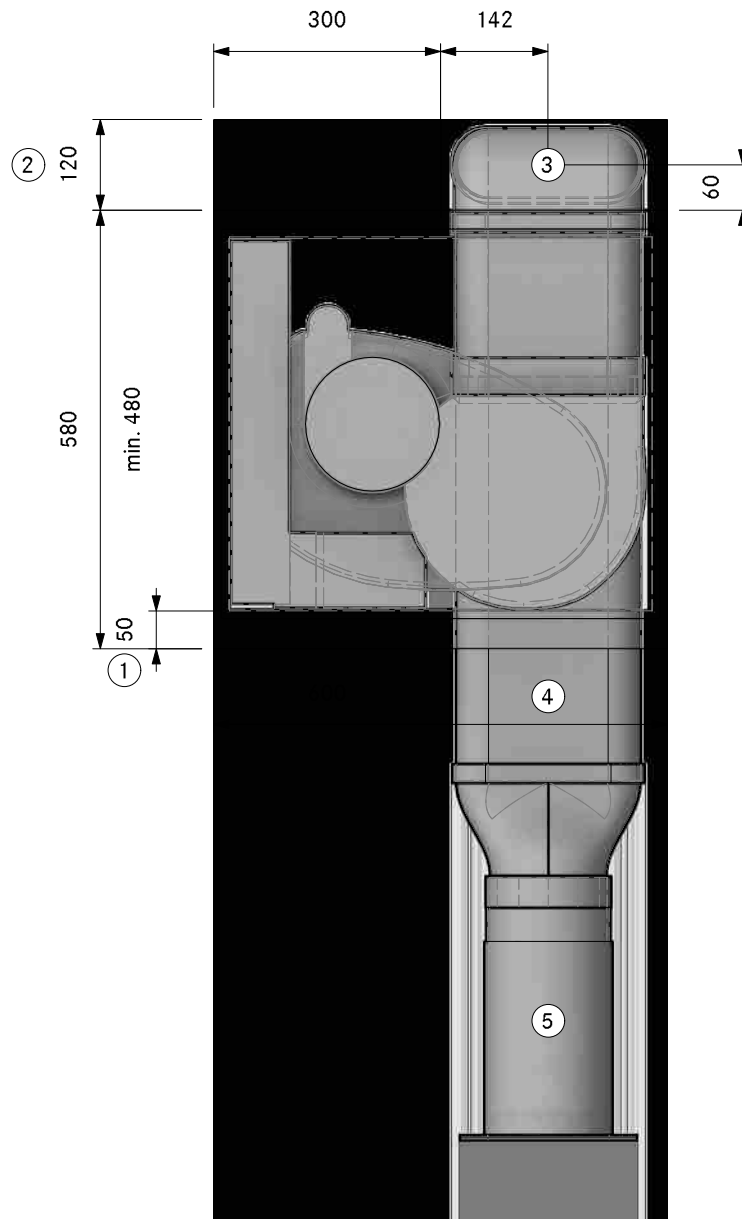

- ①. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- ②. Min. space required
- ③. Connection point Ecotube
- ④. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN 18560-2, a screed reinforcement layer is required
- ⑤. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA30320**  
**SPure Floor front UEBR**

LAYOUT

**SA**

Version, 1.0

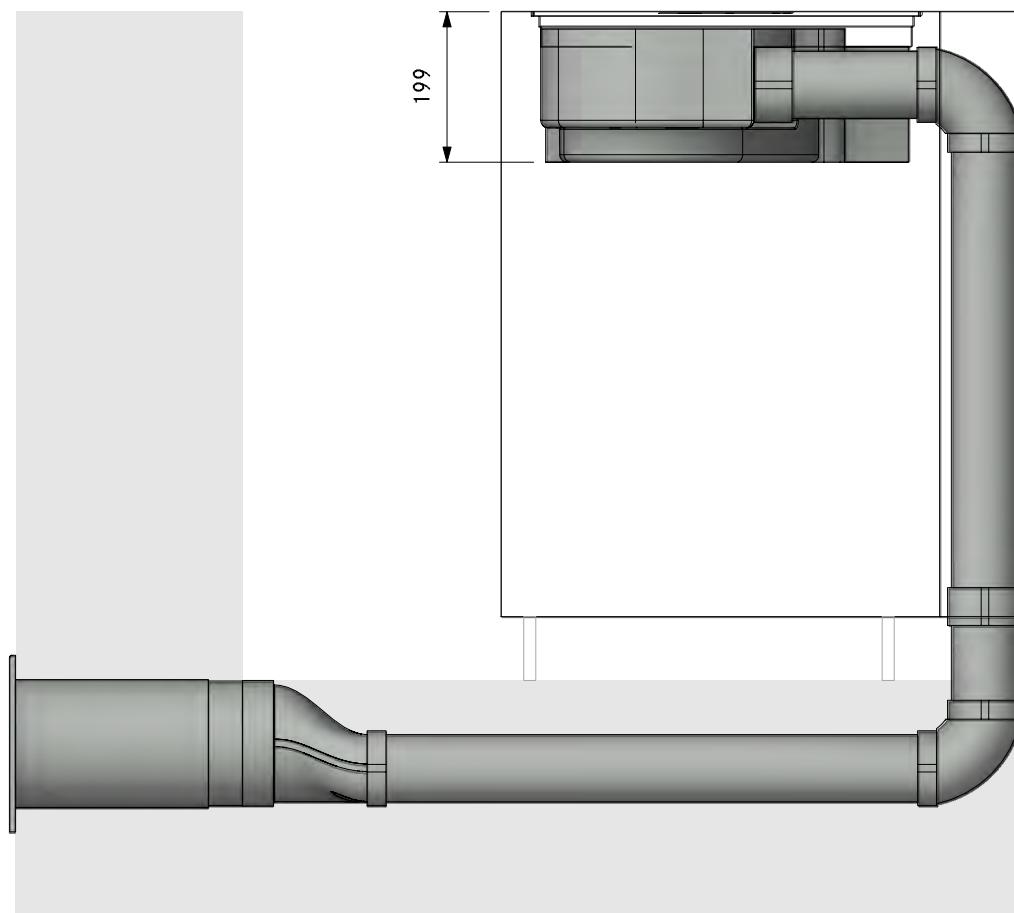

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


**SPA30320**  
**SPure Floor front UEBR**

Version, 1.0




LAYOUT

FA


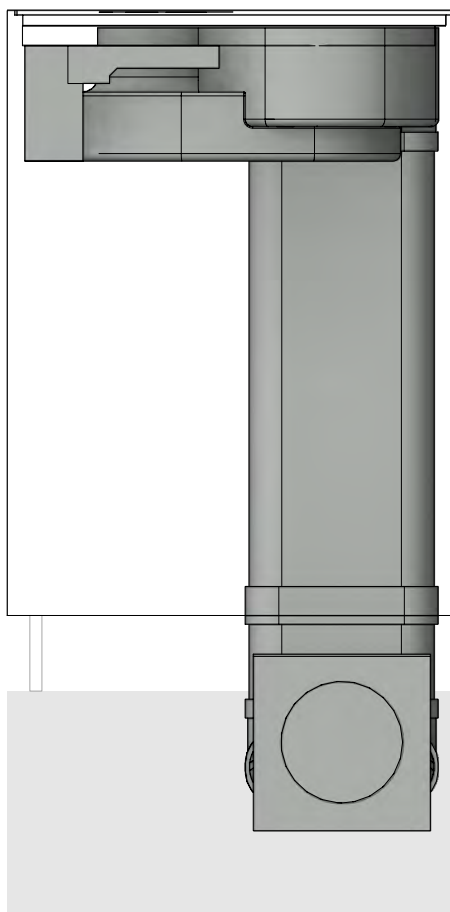


LAYOUT

Detail

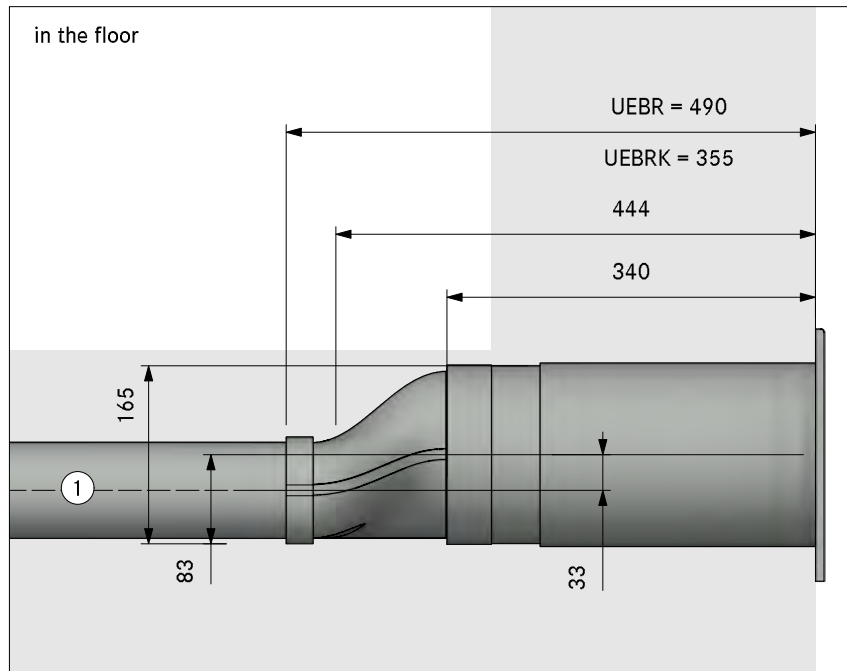


in the plinth area

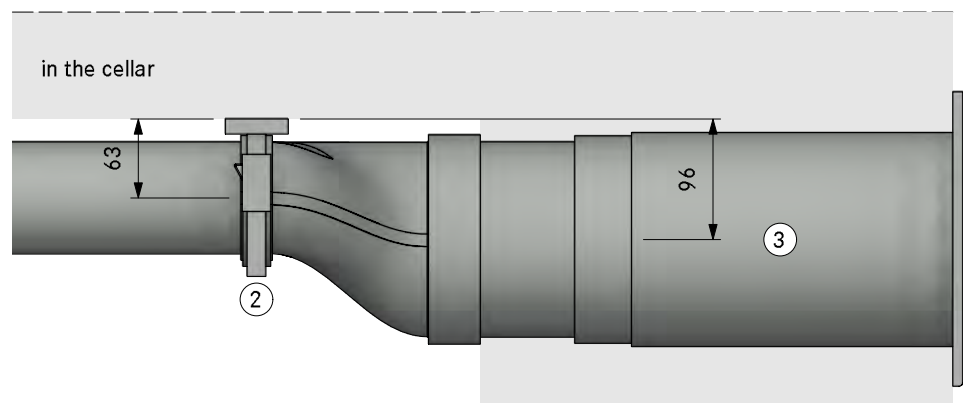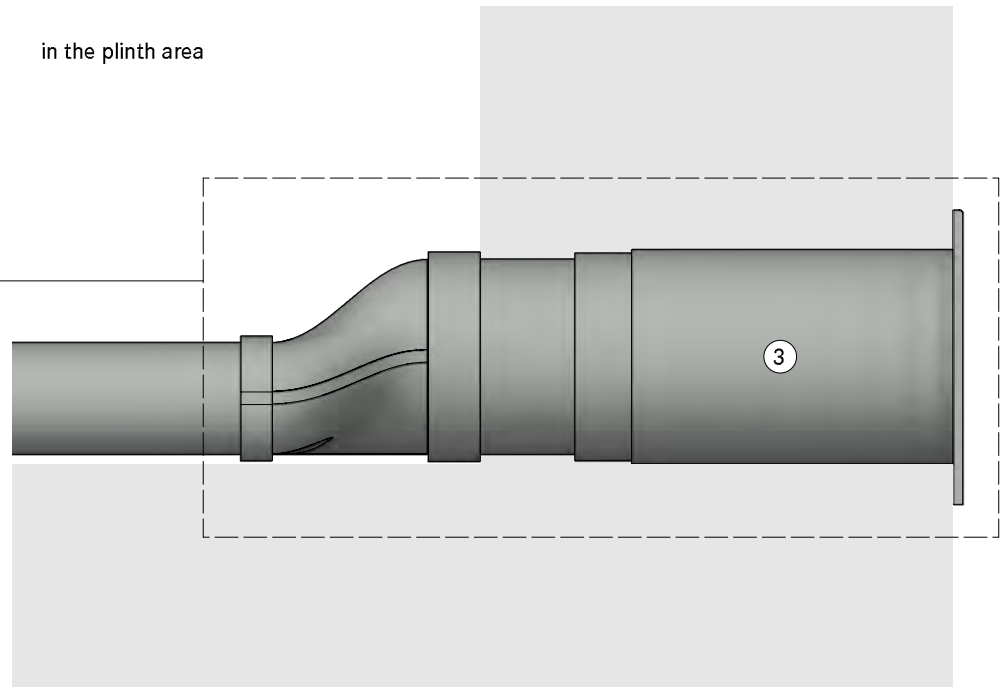


1. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
2. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract



Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
<b>Item BORA Ecotube</b>		
4	EFBV90	90° bend flat vertical
2	EFV	duct connection flat
1	UEBF	3box wall sleeve
3	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

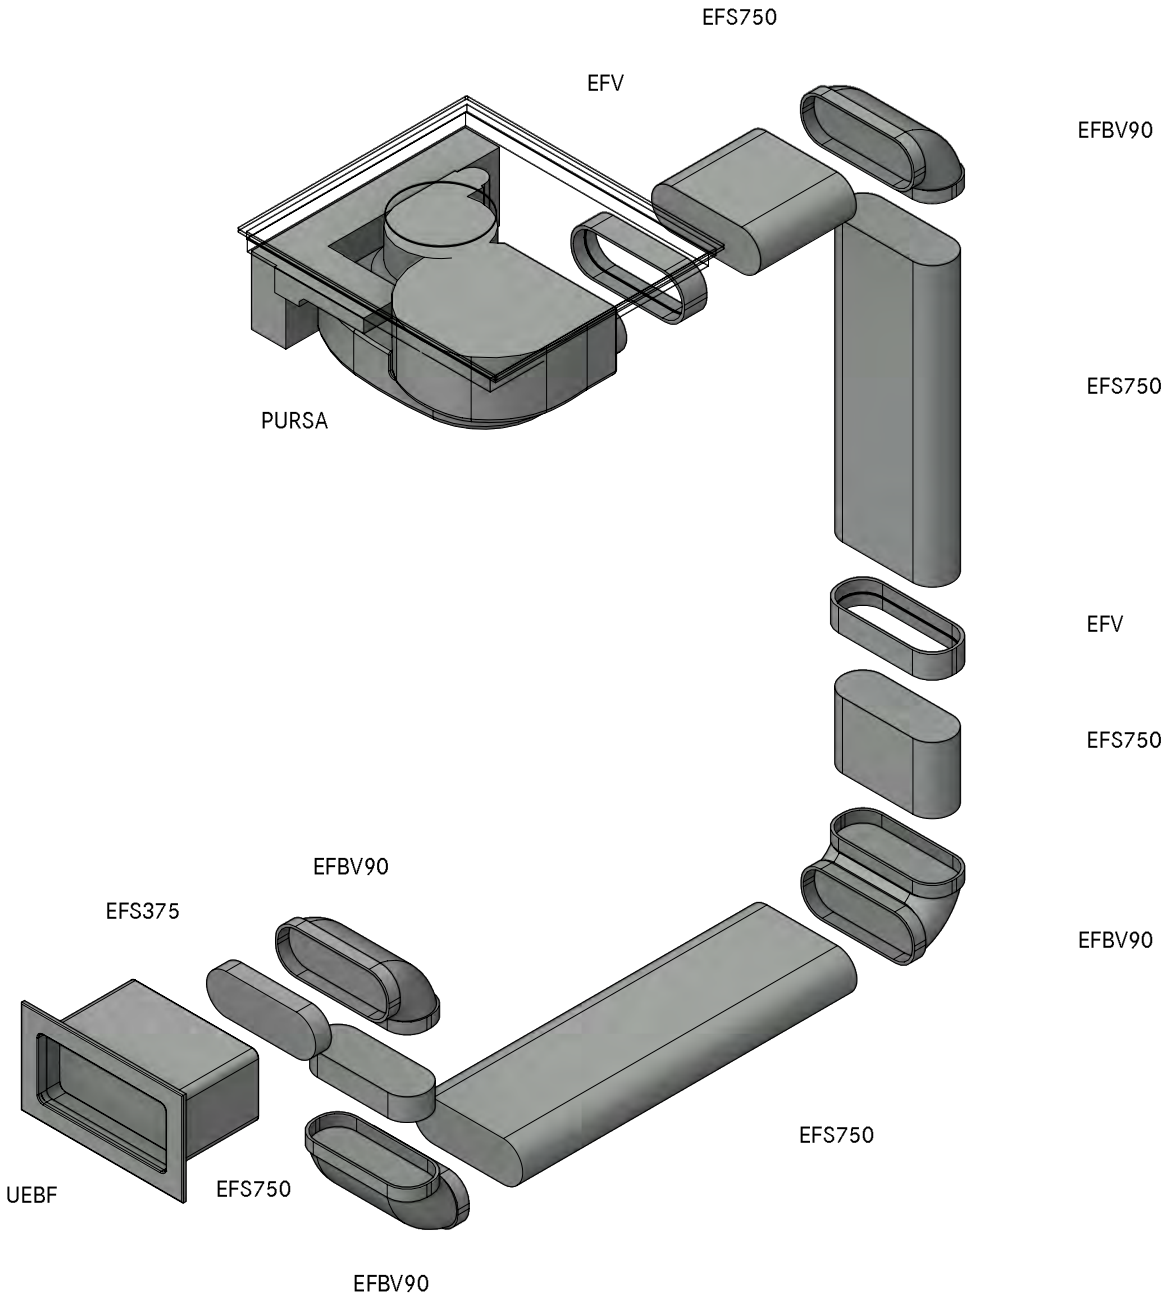



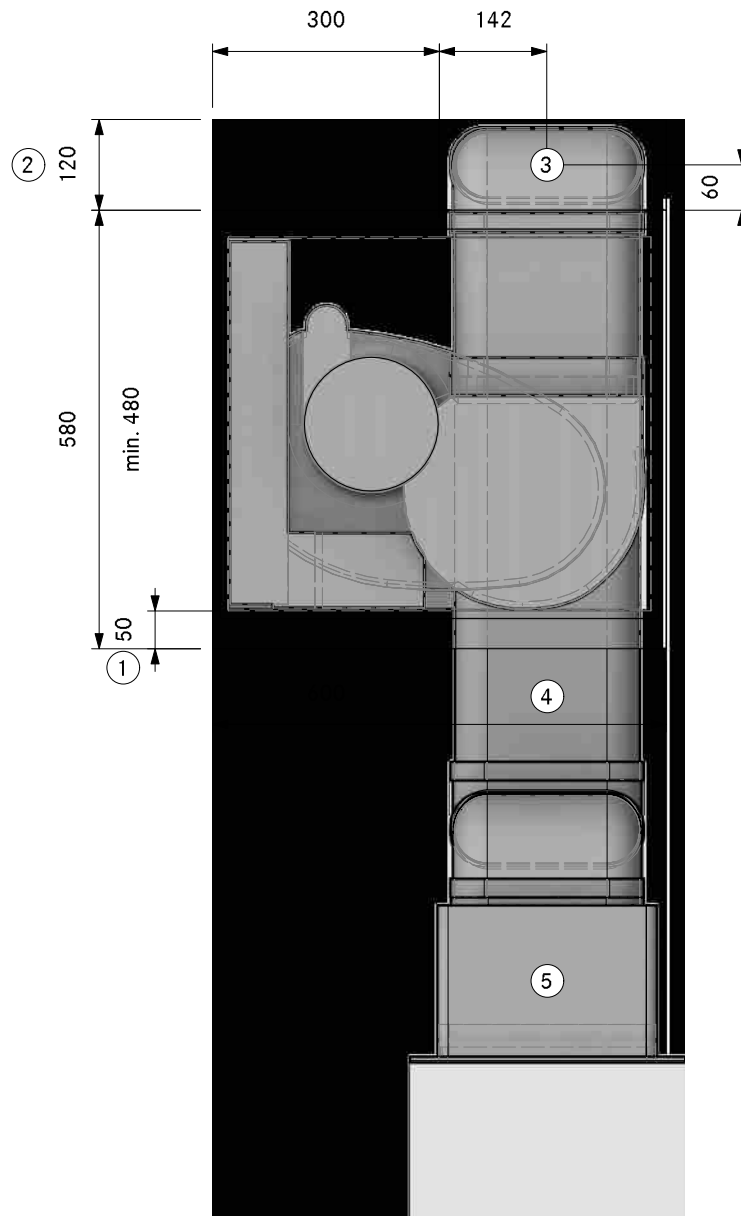

- |  |   |   |
|--|---|---|
| <p>①. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.</p> <p>②. Min. space required</p> | <p>③. Connection point Ecotube</p> <p>④. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required</p> | <p>⑤. Hole size 310 x 155mm<br/>Wall vent must be able to fully open for air to extract</p> |
|--|---|---|


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA30330  
SPure Floor front swan neck UEBF

LAYOUT

SA

Version, 1.0

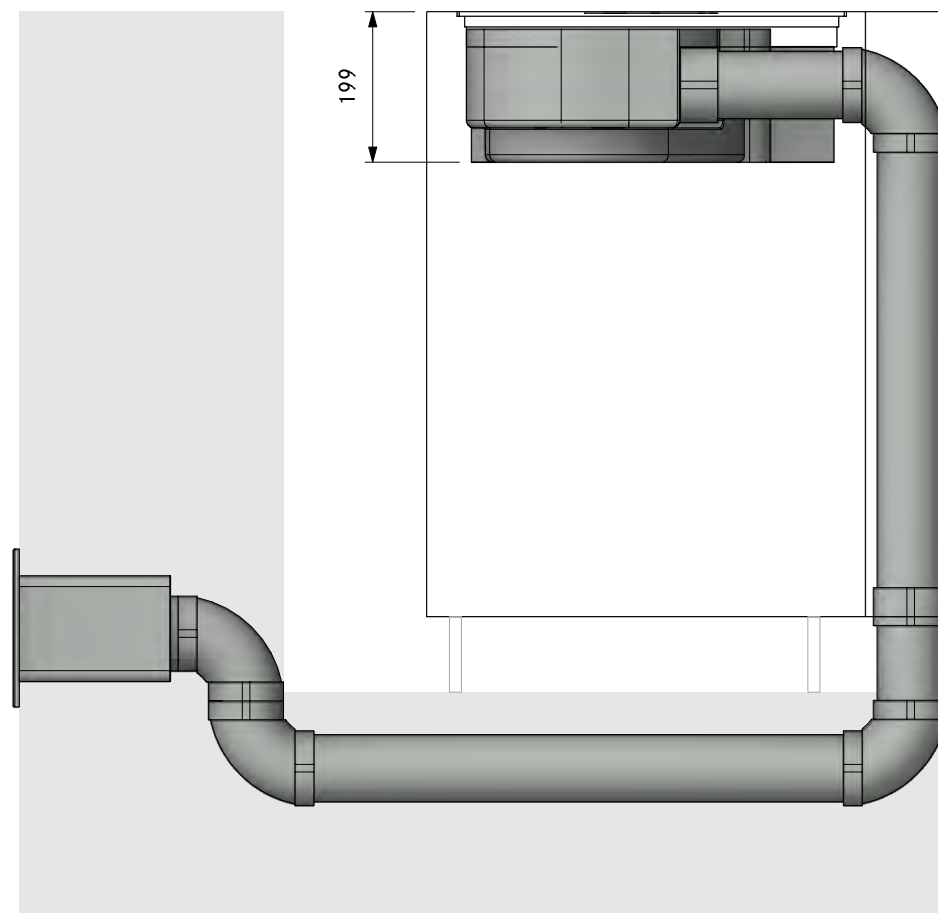


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA30330**  
**SPure Floor front swan neck UEBF**

LAYOUT

FA

Version, 1.0

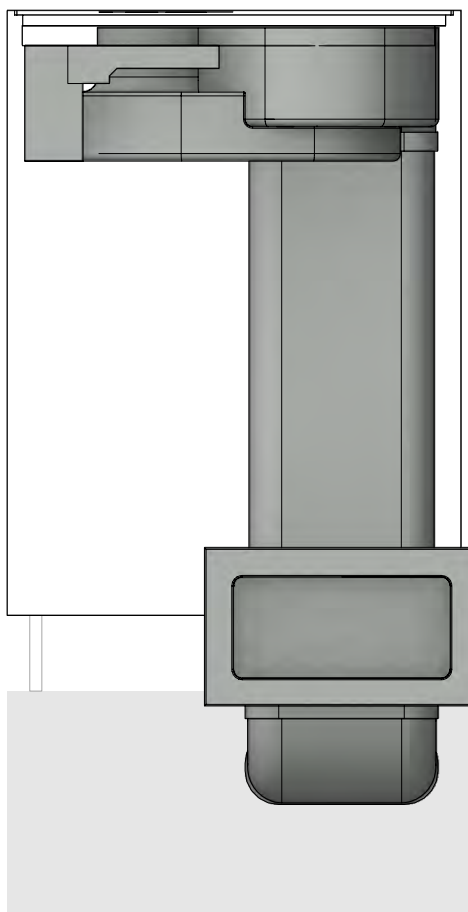

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


SPA30330  
SPure Floor front swan neck UEBF

Version, 1.0



LAYOUT


Detail

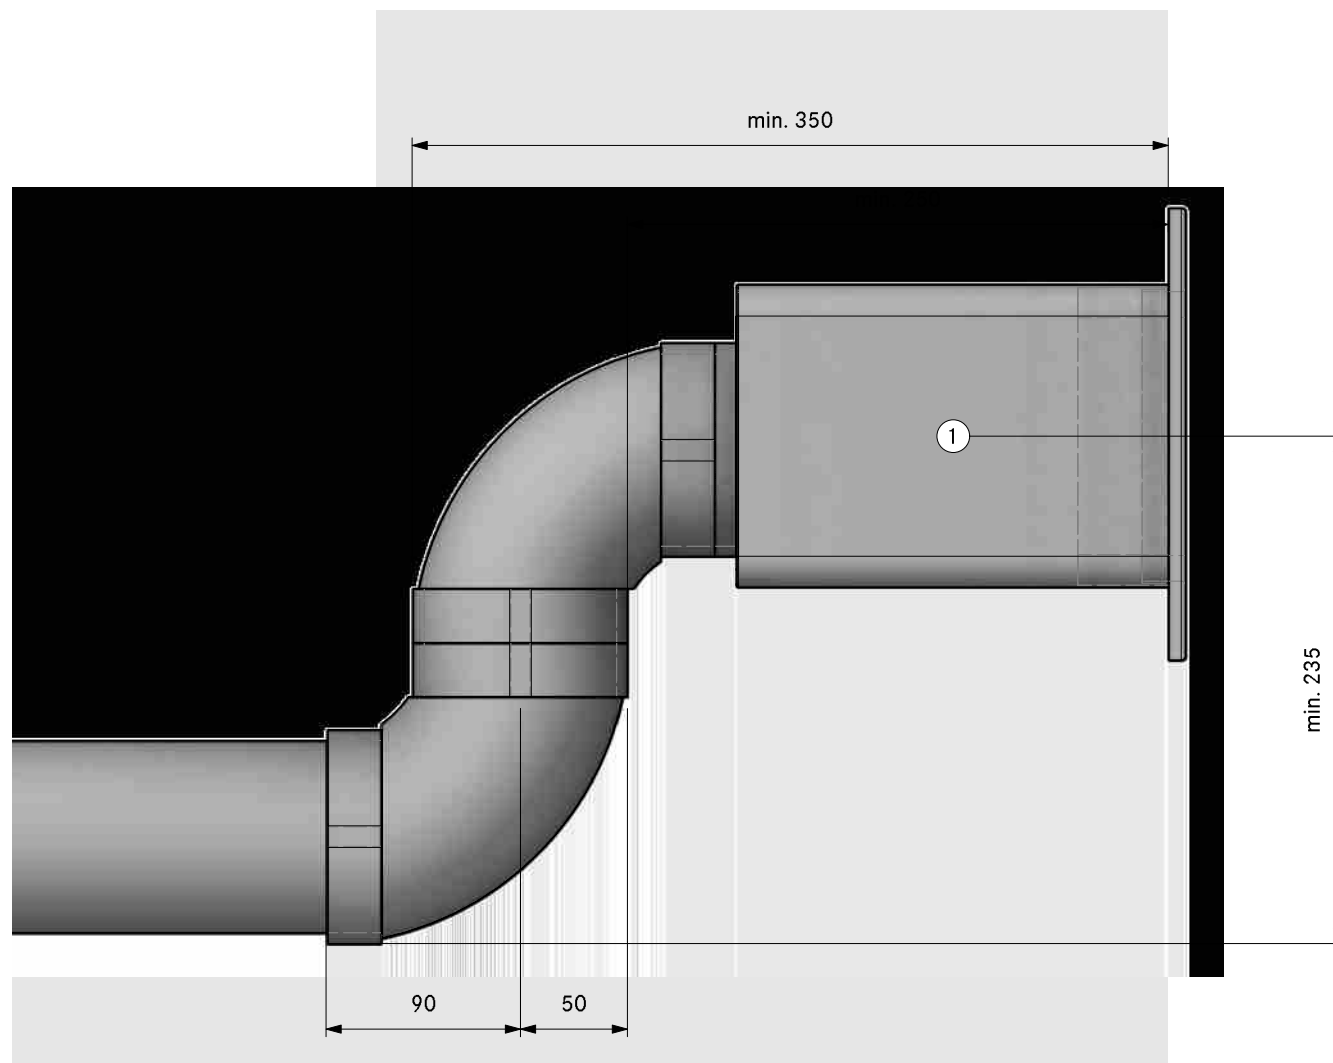

- ①. Hole size 310 x 155mm  
Wall vent must be able to fully  
open for air to extract



Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
3	EFBV90	90° bend flat vertical
1	EFR90	transition flat round 90°
2	EFV	duct connection flat
1	ERV	duct connection round
1	UEBR	3box wall sleeve round
3	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

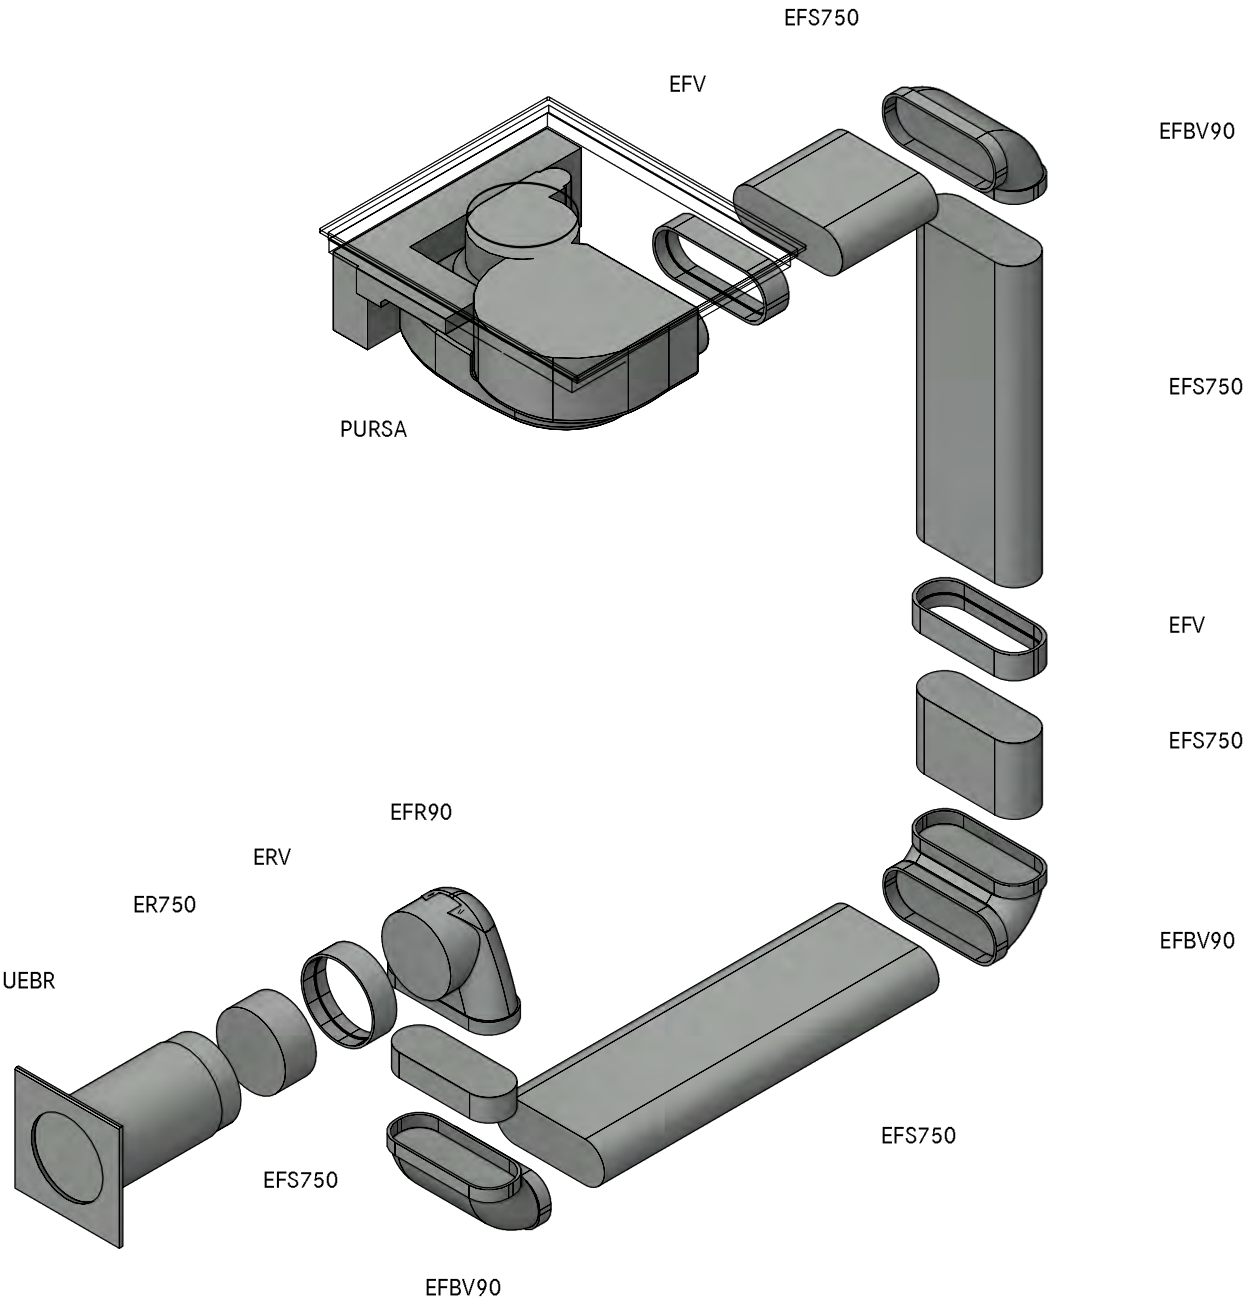


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA30340  
SPure Floor front swan neck UEBR

LAYOUT

GR HK

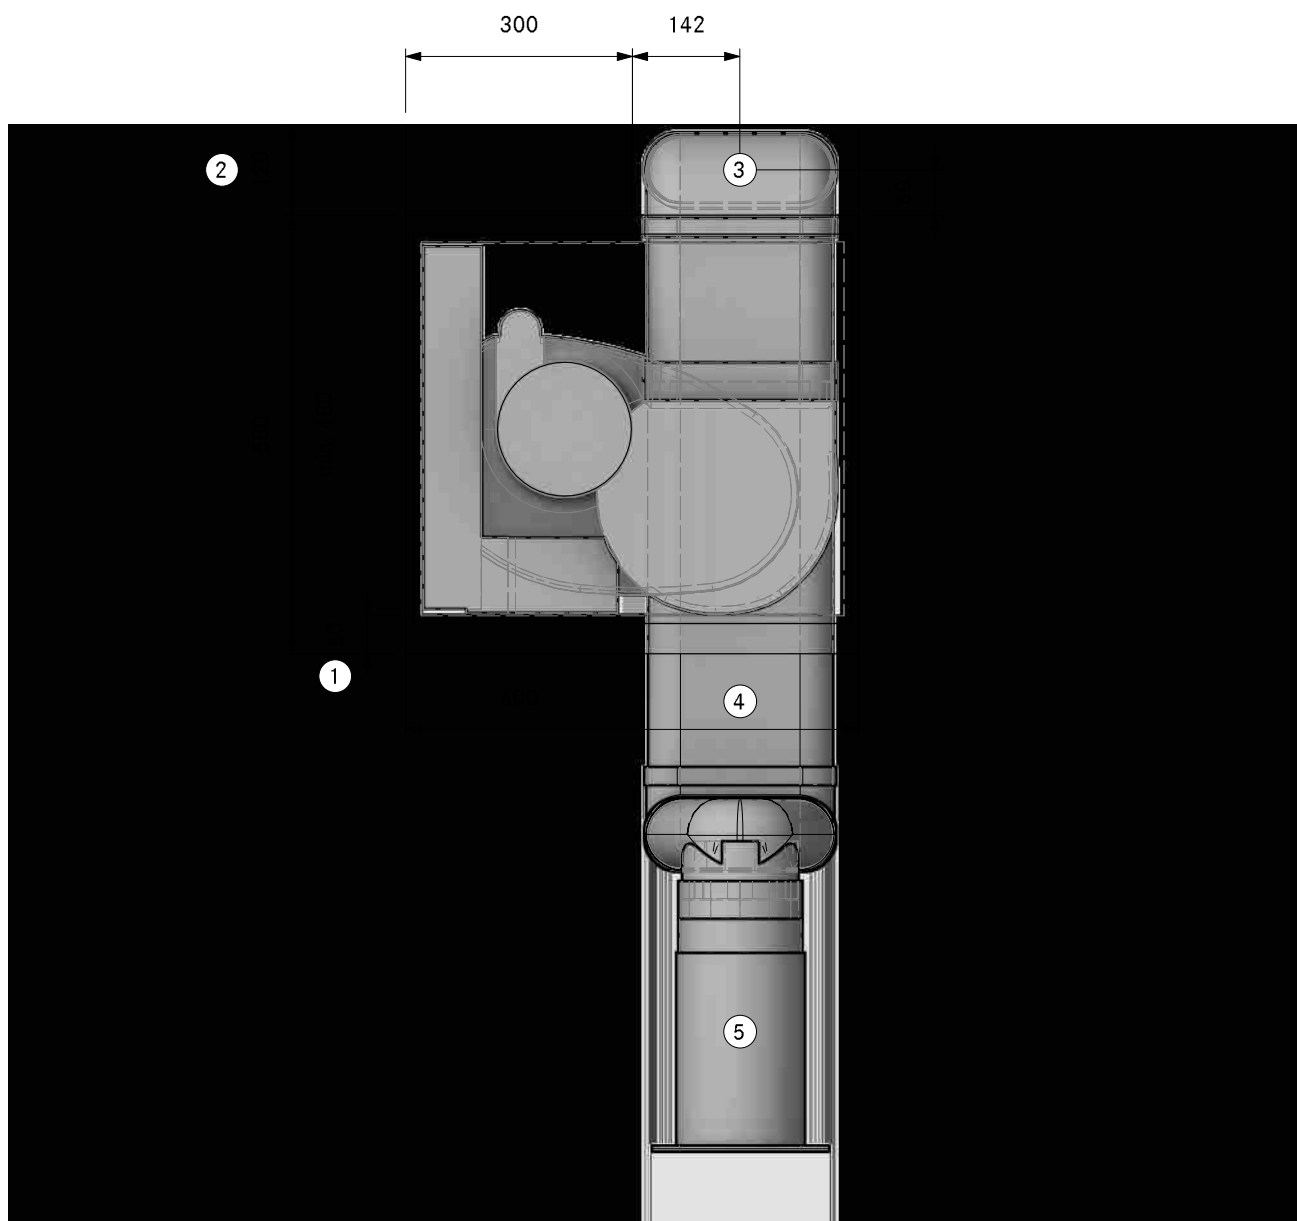

- ①. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- ②. Min. space required
- ③. Connection point Ecotube
- ④. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
- ⑤. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA30340**  
**SPure Floor front swan neck UEBR**

LAYOUT

**SA**

Version, 1.0

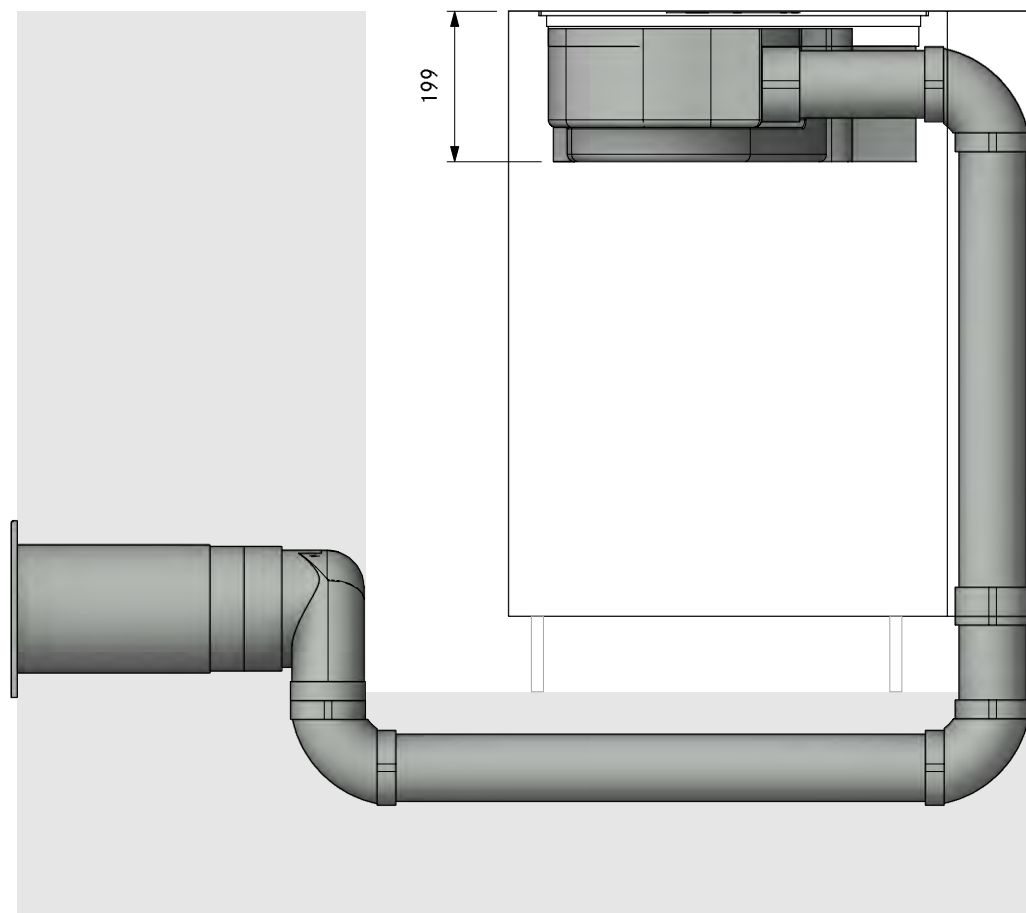



MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


**SPA30340**  
**SPure Floor front swan neck UEBR**

Version, 1.0



LAYOUT

FA

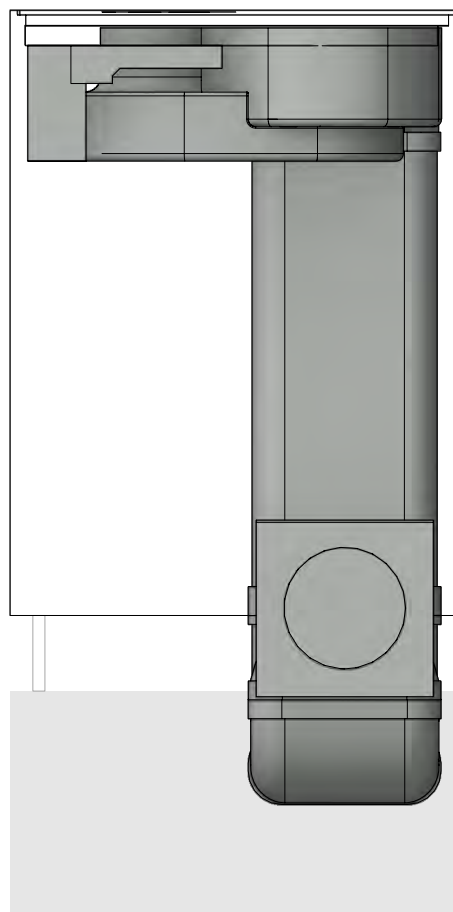

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


SPA30340  
SPure Floor front swan neck UEBR

Version, 1.0




LAYOUT

Detail

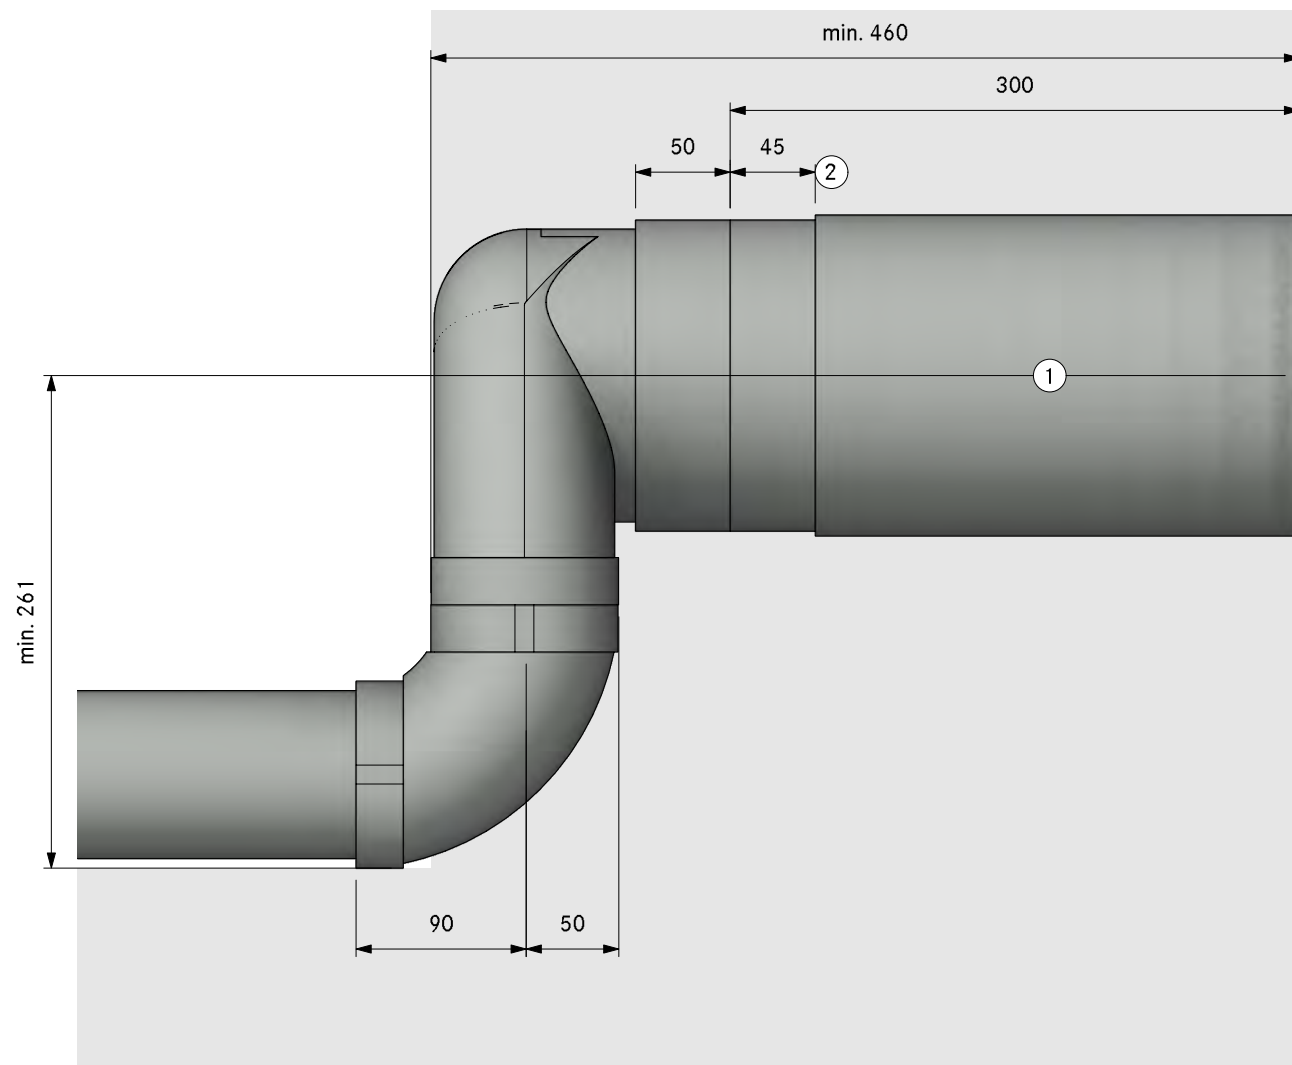


- ①. Hole size min. Ø180mm.  
Wall vent must be able to fully  
open for air to extract
- ②. Bushing length 45mm (can be  
shortened by 20mm)



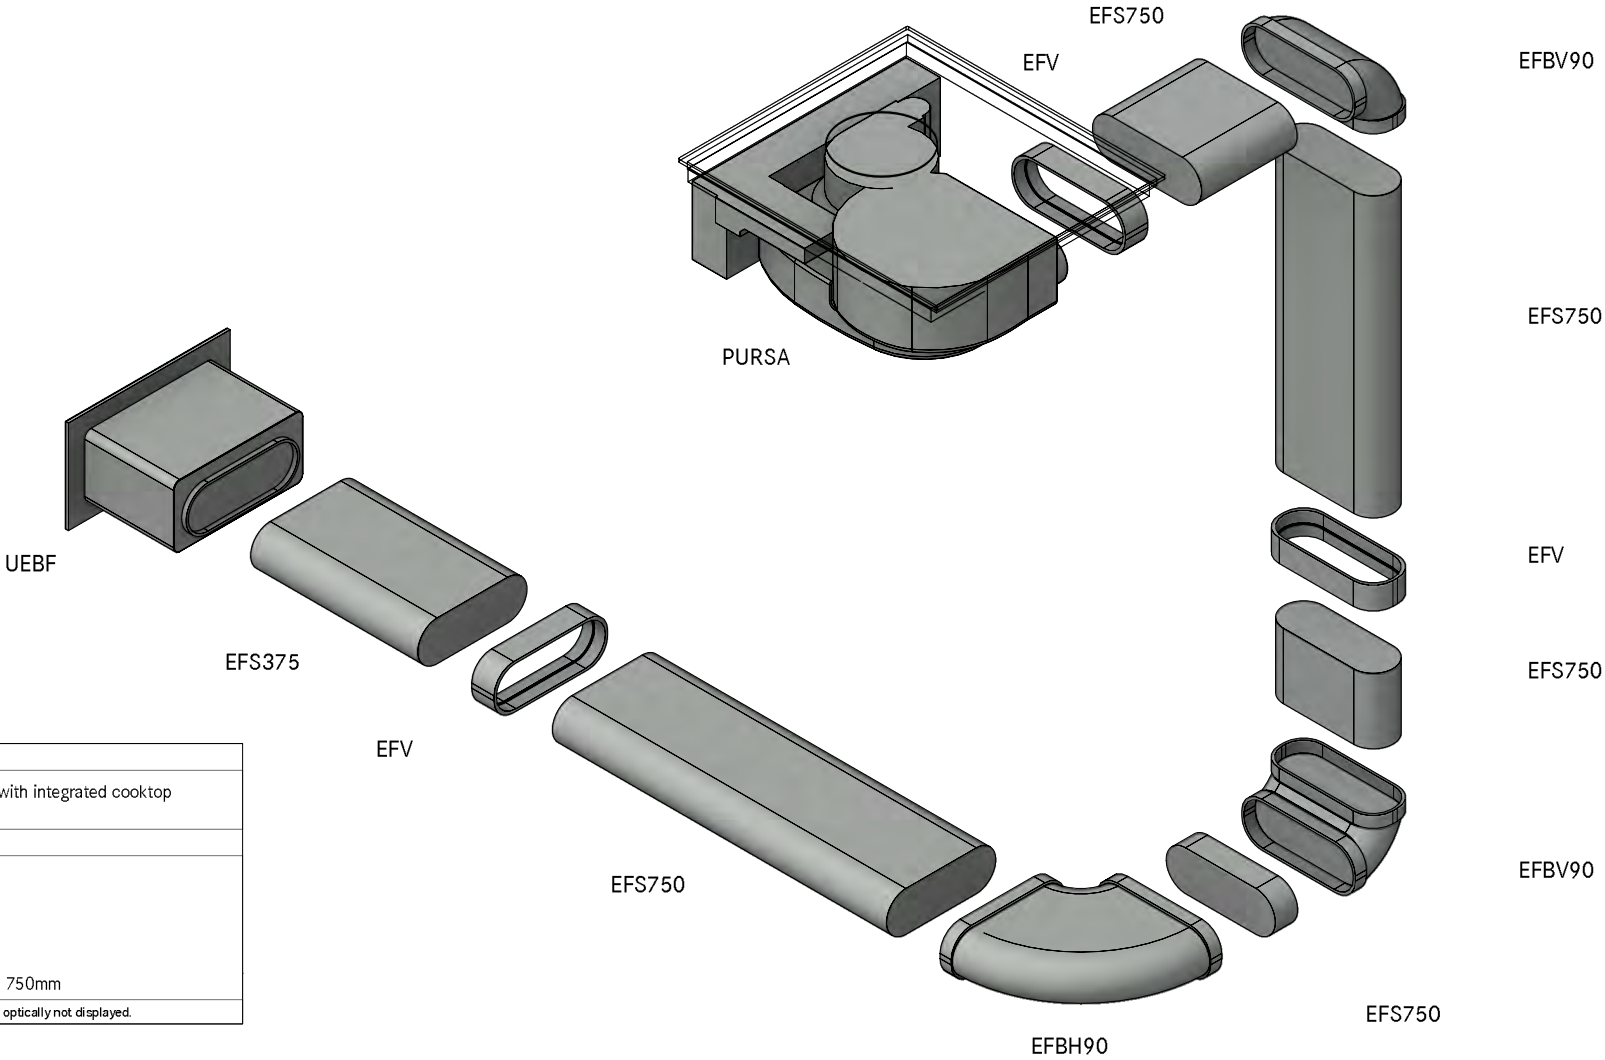

Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
1	EFBH90	90° bend flat horizontal
2	EFBV90	90° bend flat vertical
3	EFV	duct connection flat
1	UEBF	3box wall sleeve
3	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

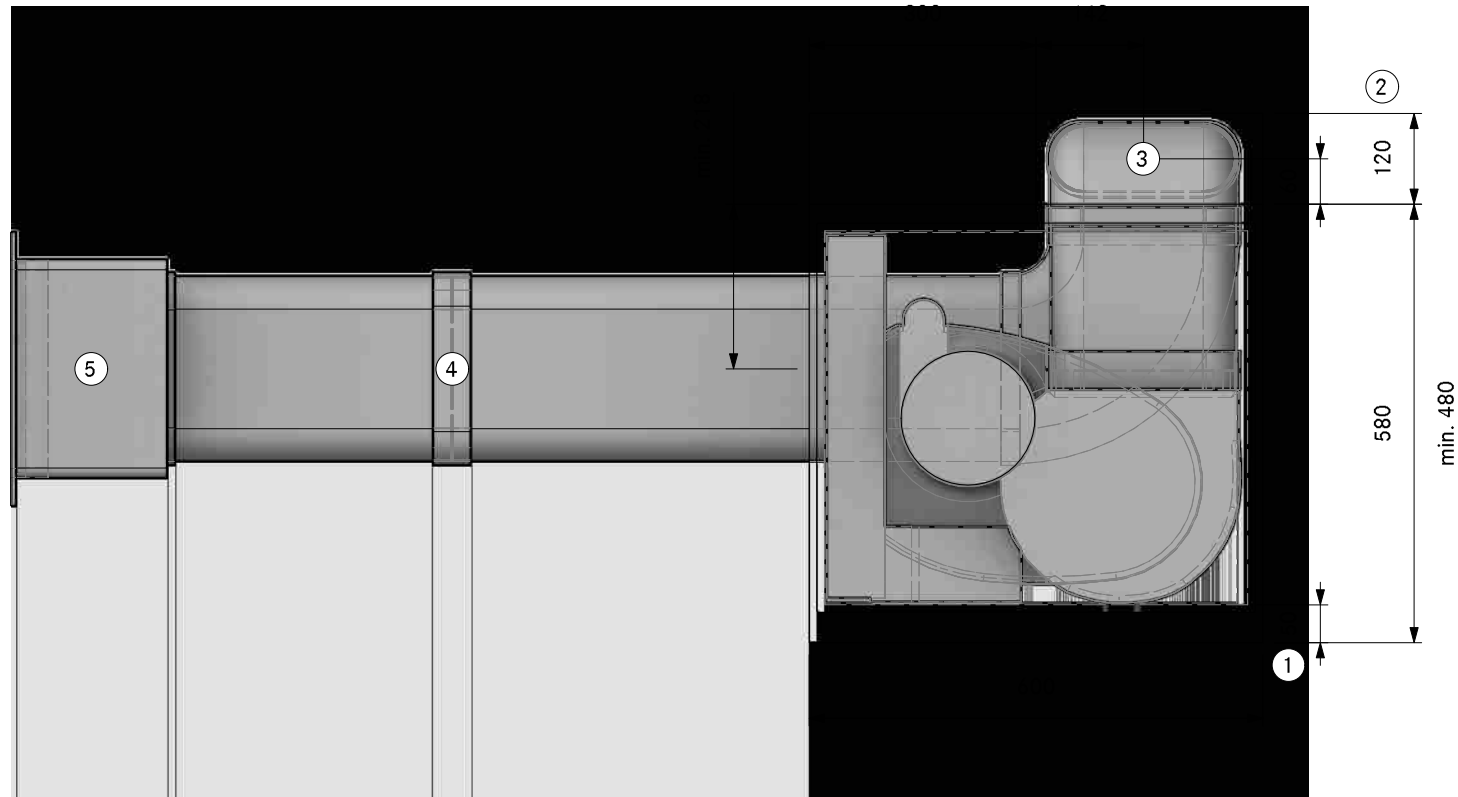

①. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.

②. Min. space required

③. Connection point Ecotube


④. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN 18560-2, a screed reinforcement layer is required

⑤. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

**SPA304 10**  
**SPure Floor left UEBF**  
**SA**

Version, 1.0

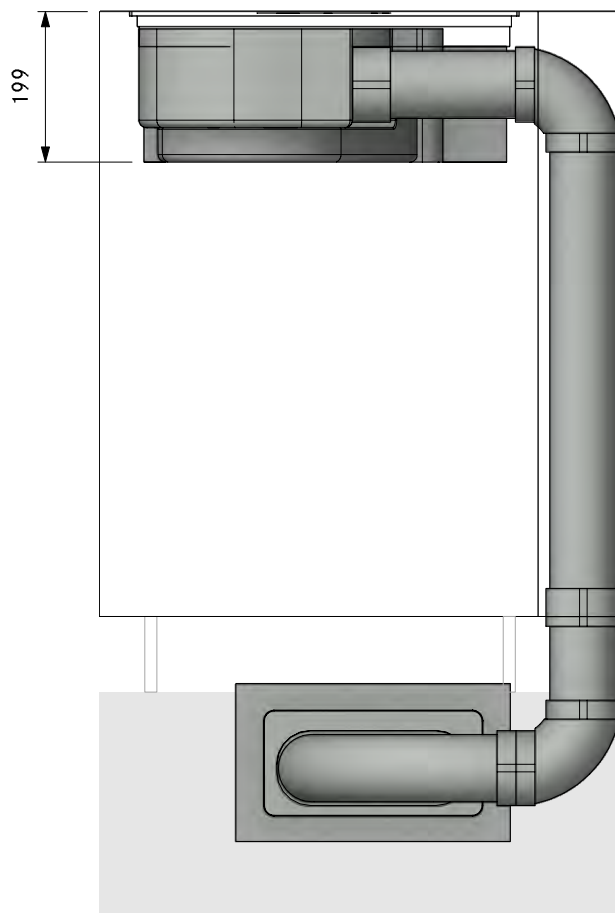


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA304 10**  
**SPure Floor left UEBF**

LAYOUT

FA

Version, 1.0

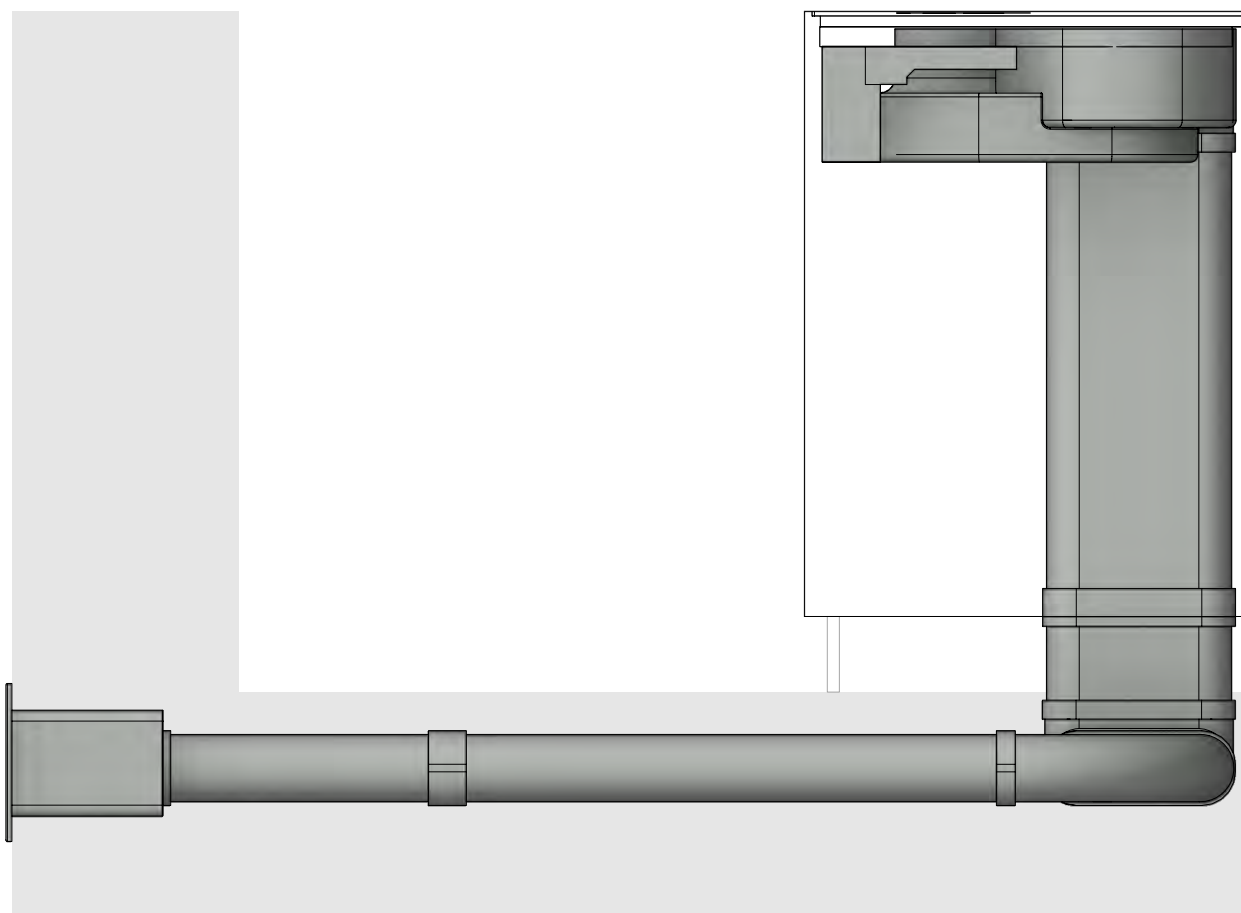


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA304 10  
SPure Floor left UEBF

LAYOUT


Detail


Version, 1.0

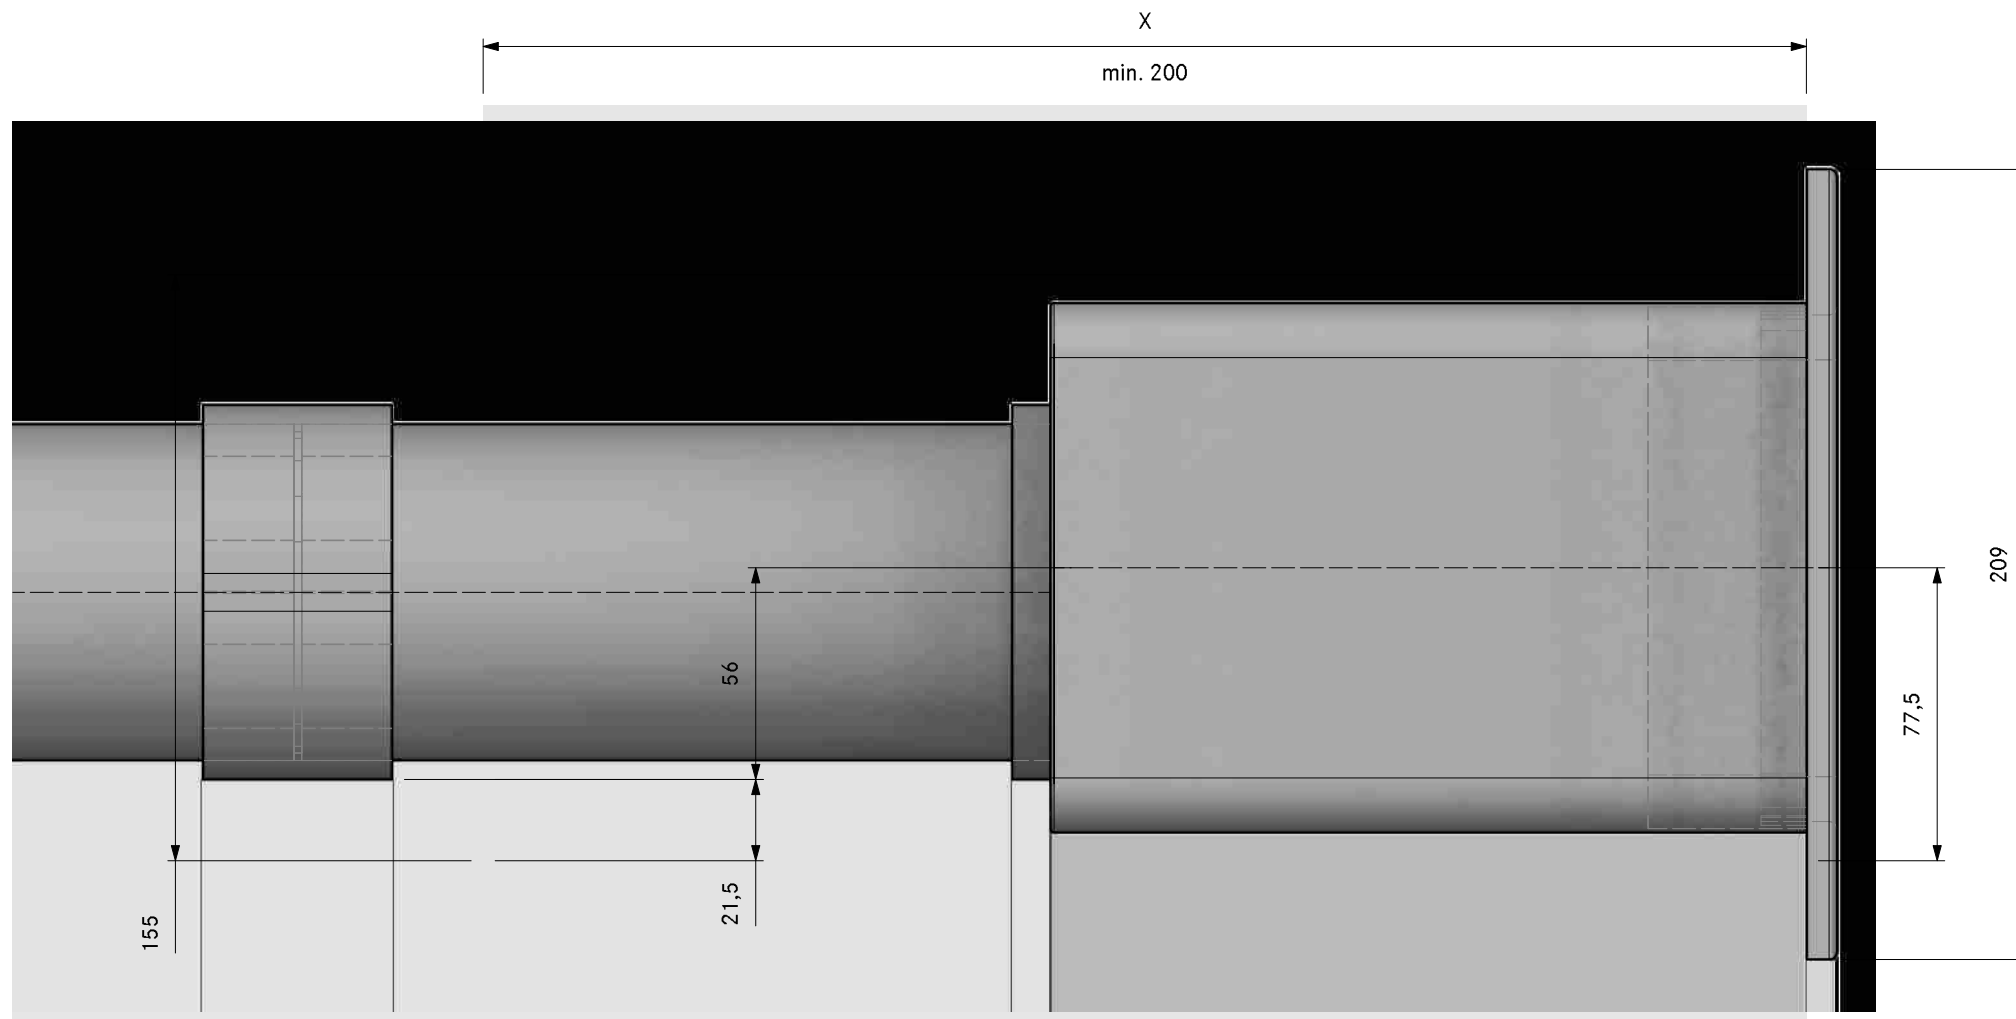





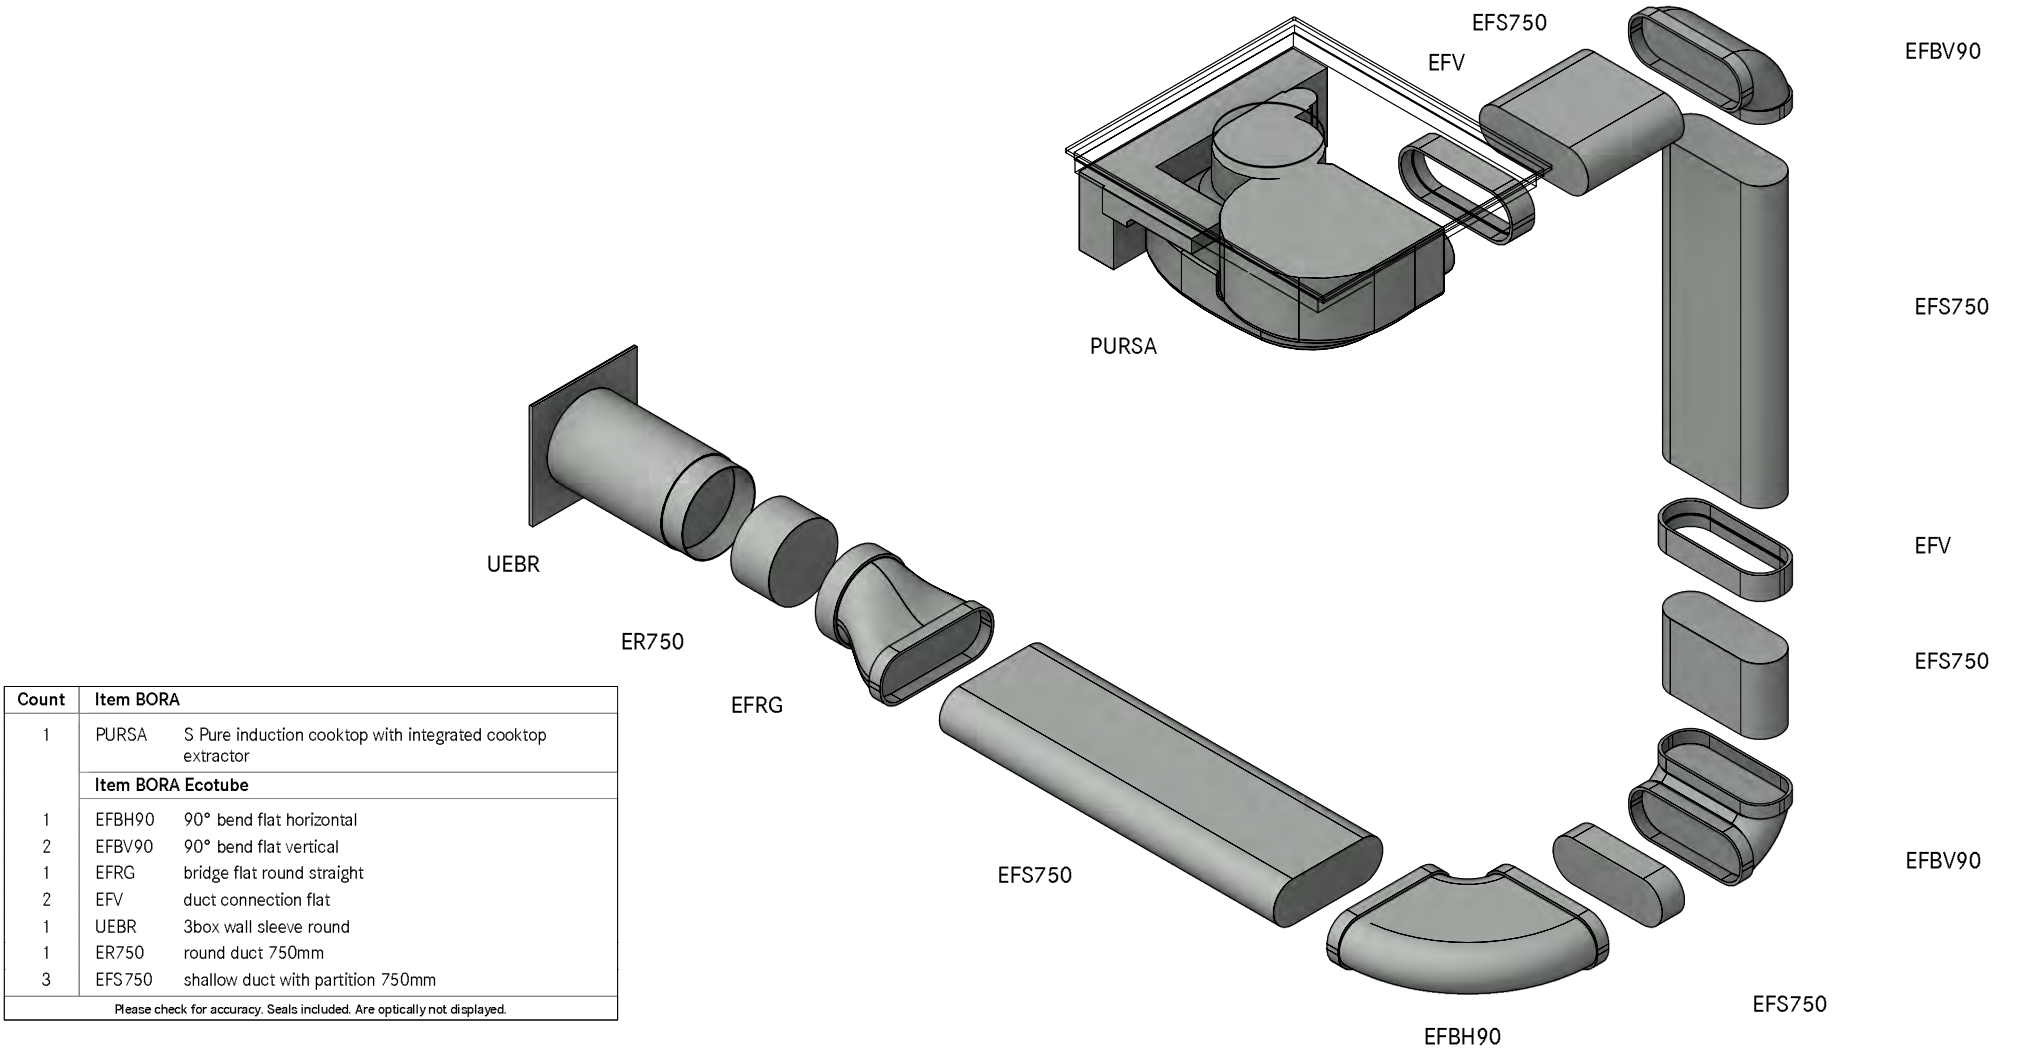

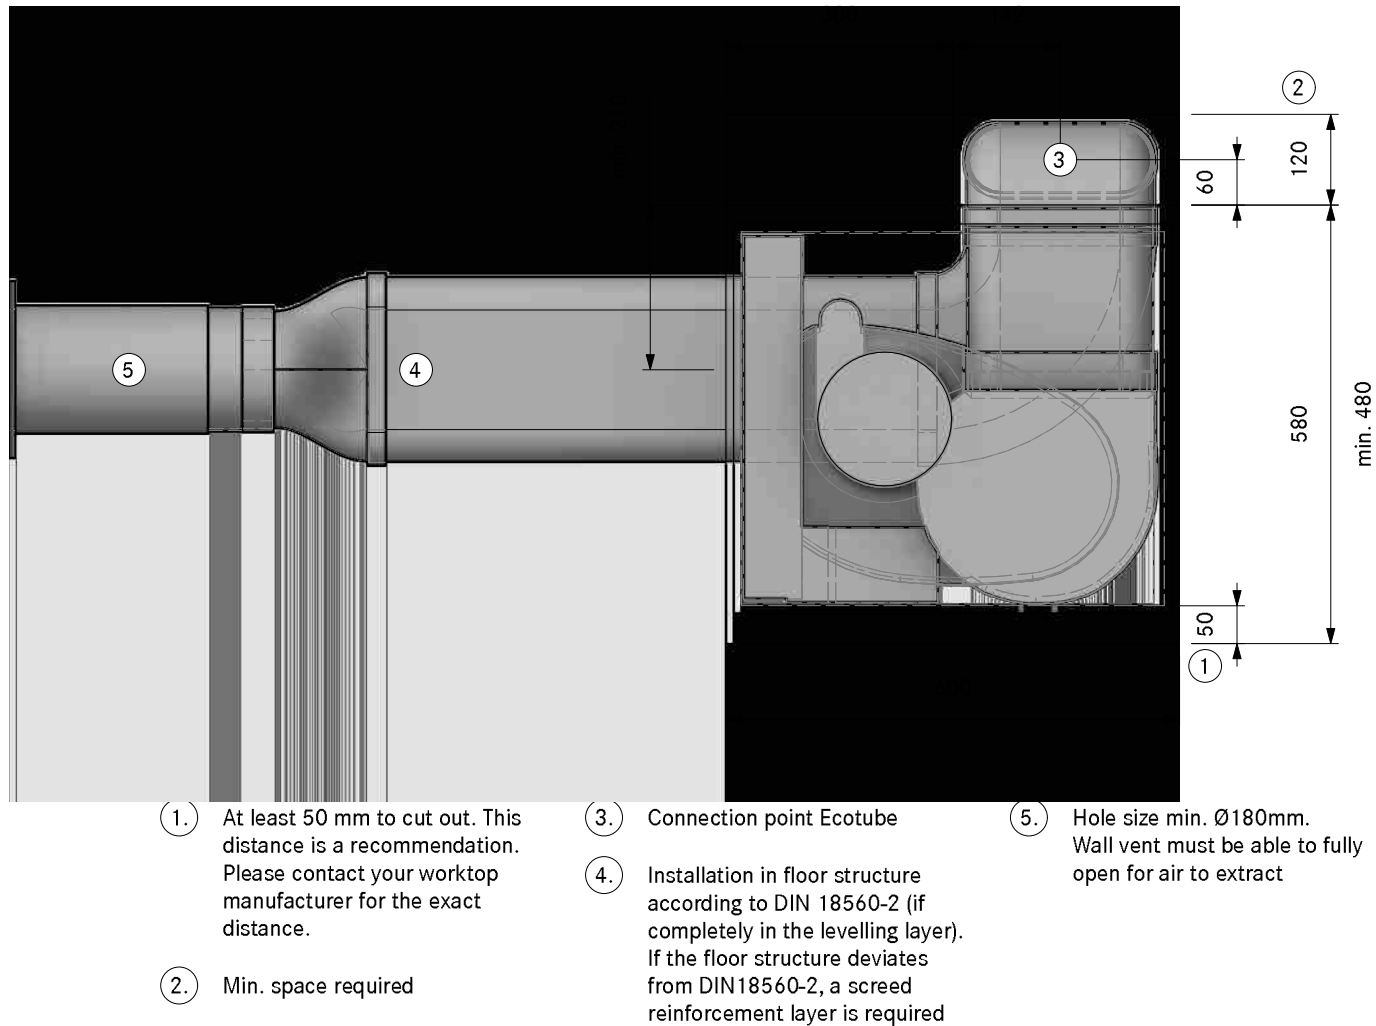


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA30420**  
**SPure Floor left UEBR**

LAYOUT

**SA**

Version, 1.0

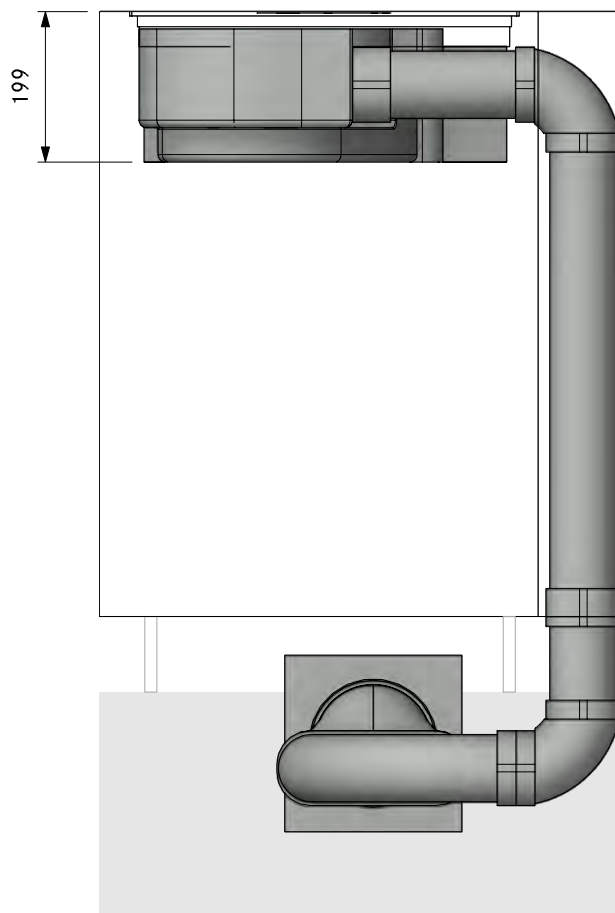


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


**SPA30420**  
**SPure Floor left UEBR**

LAYOUT


**FA**

Version, 1.0

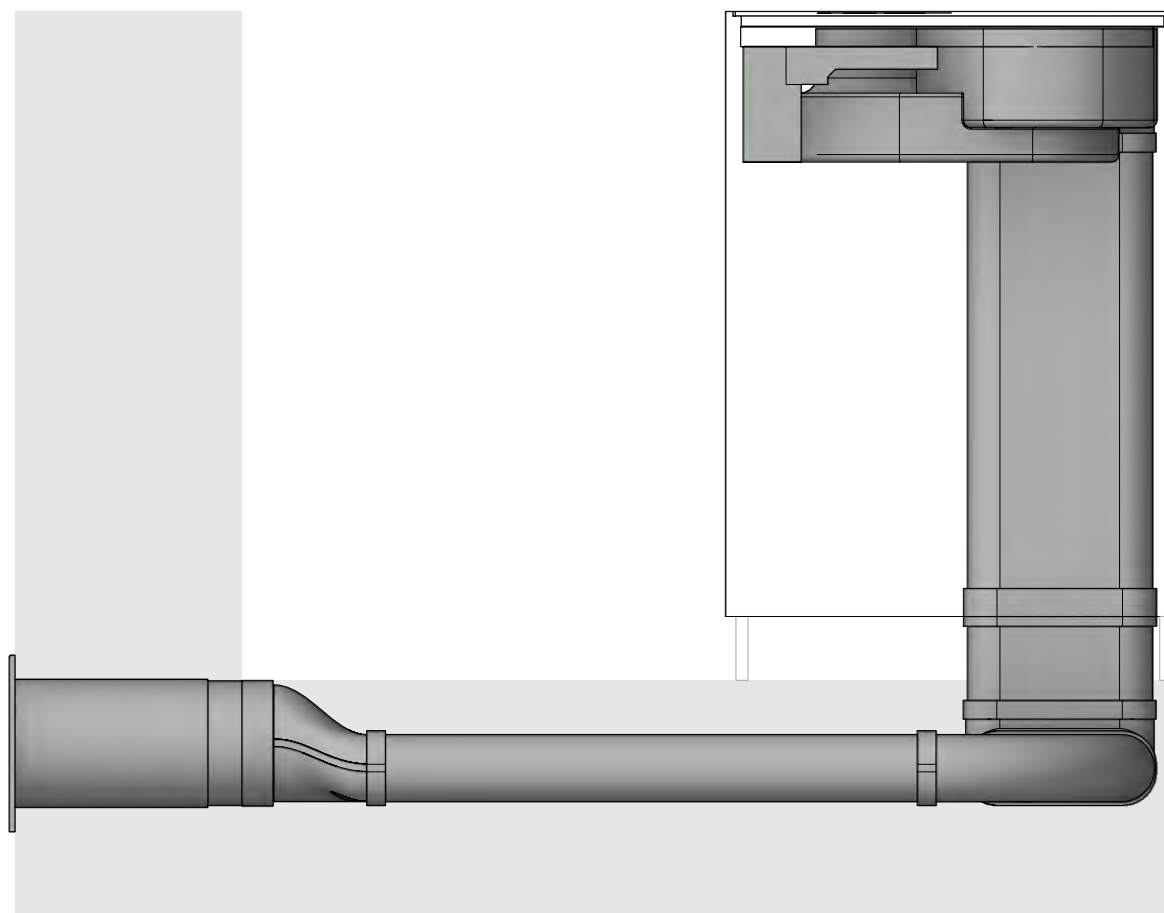

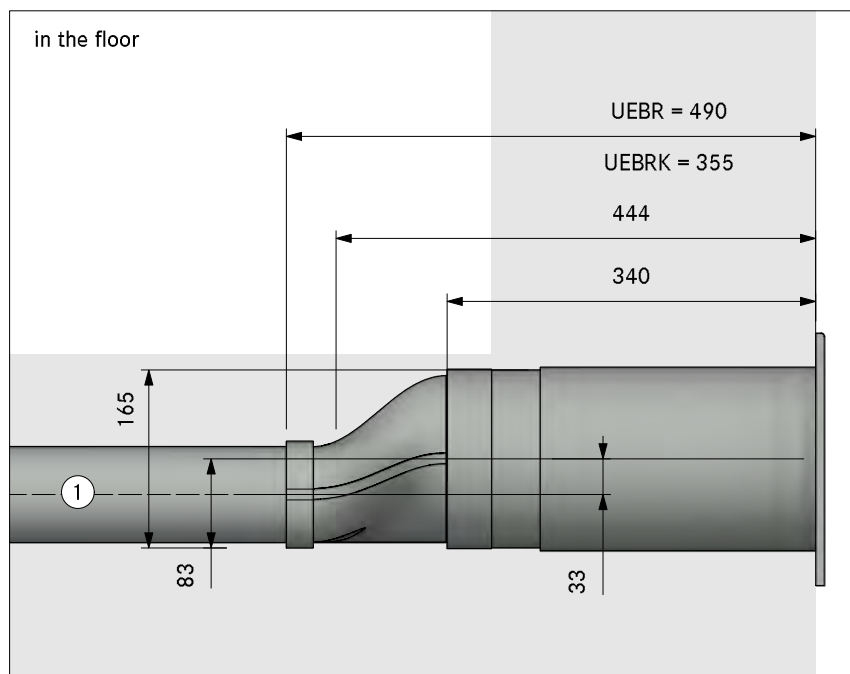


in the plinth area

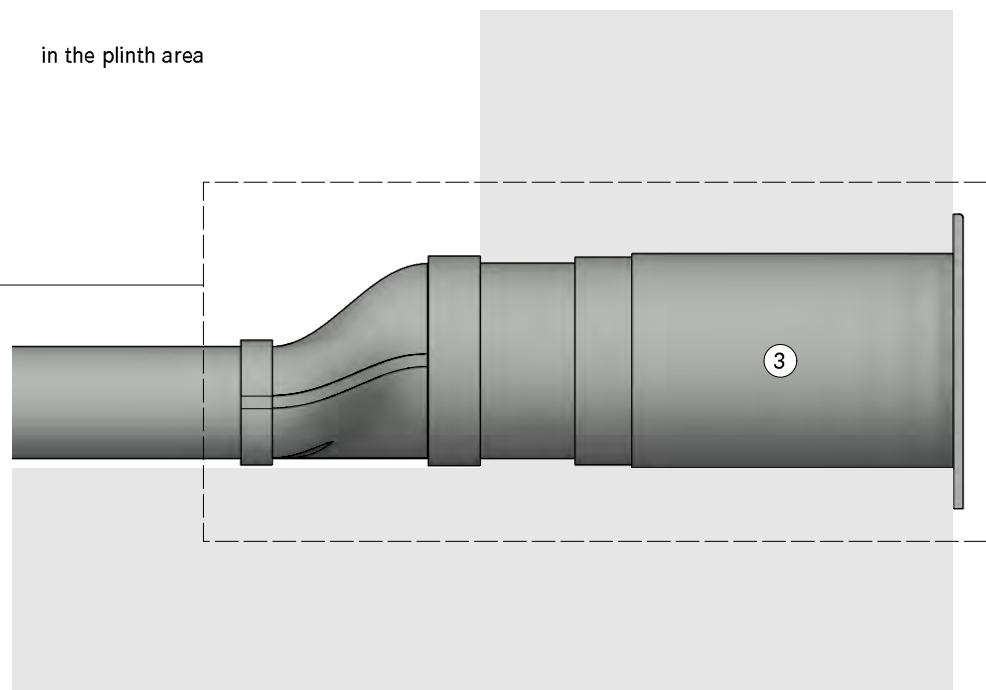


1. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
2. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract


in the cellar

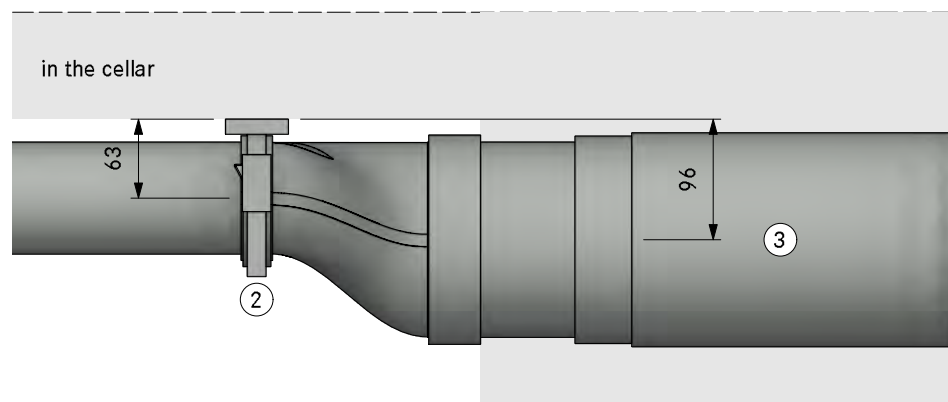



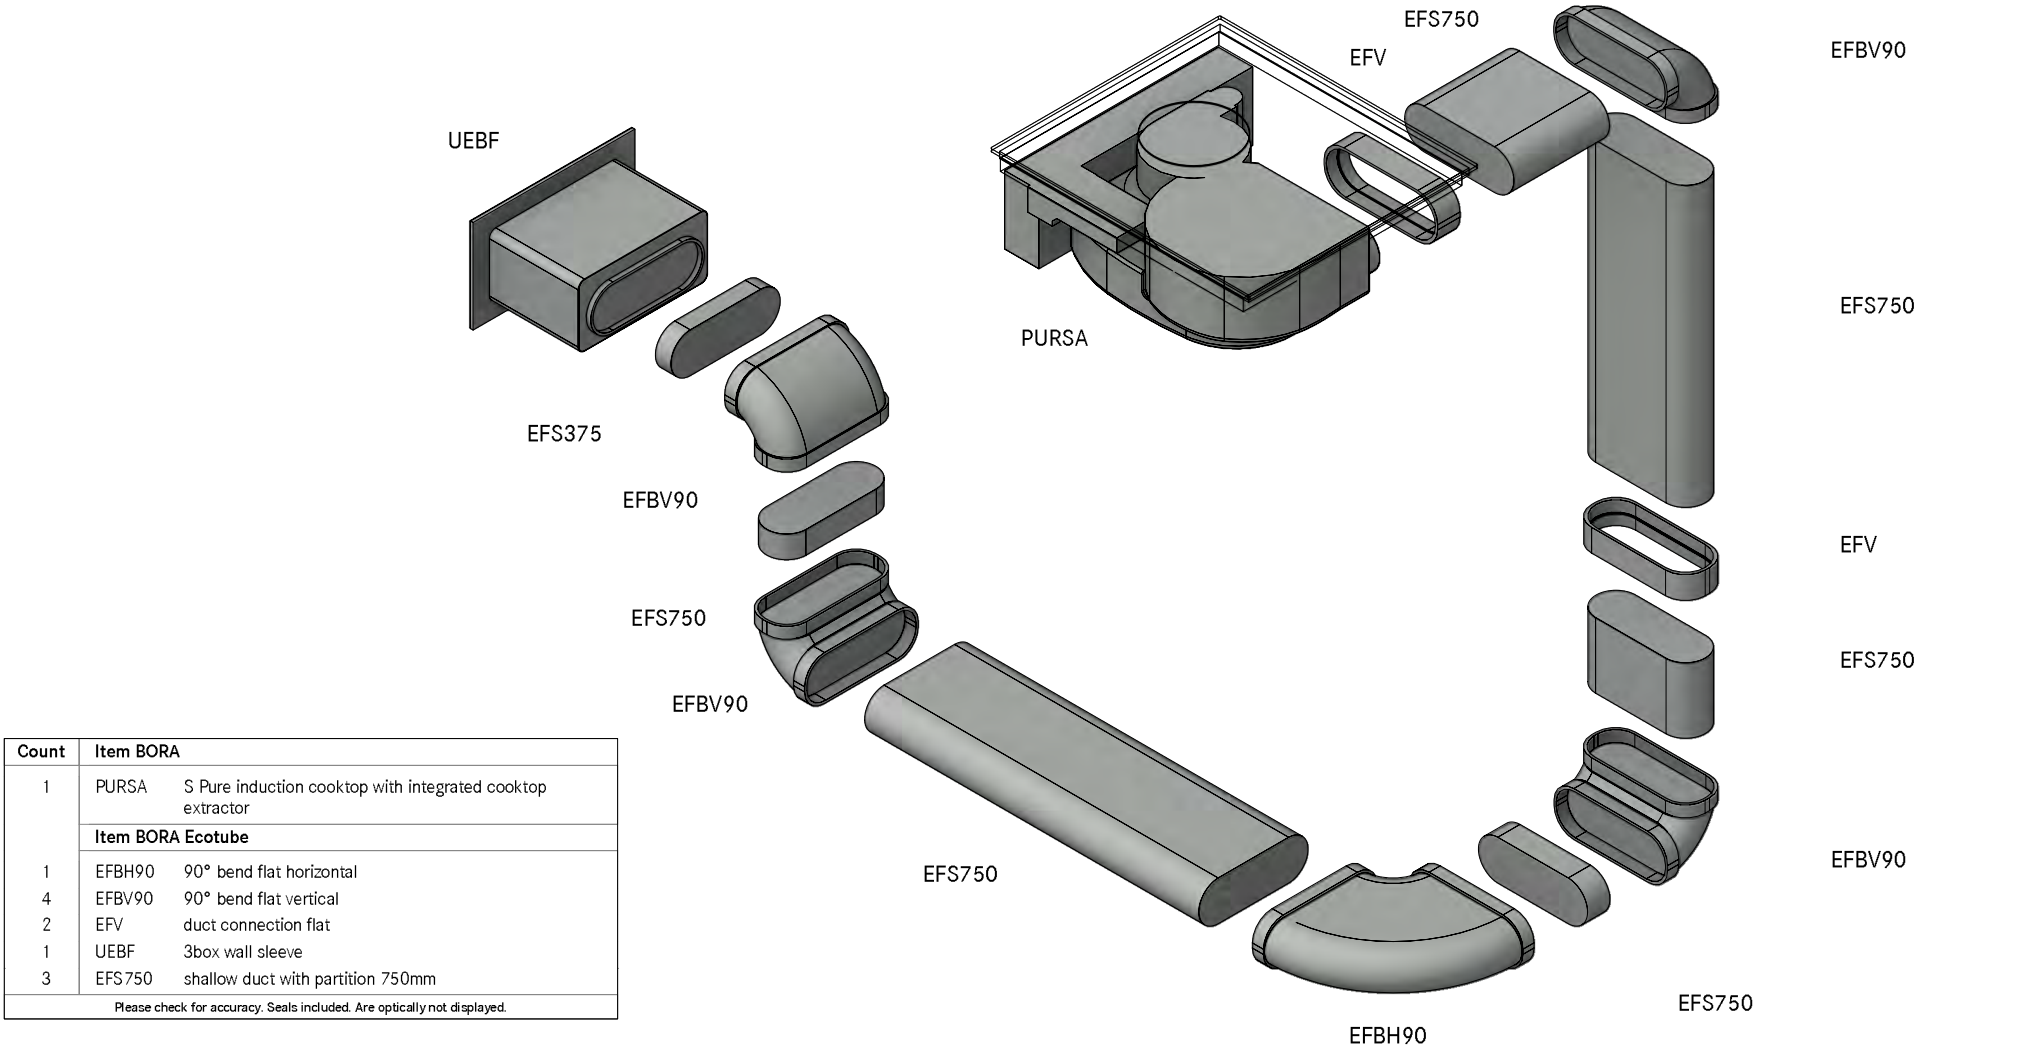



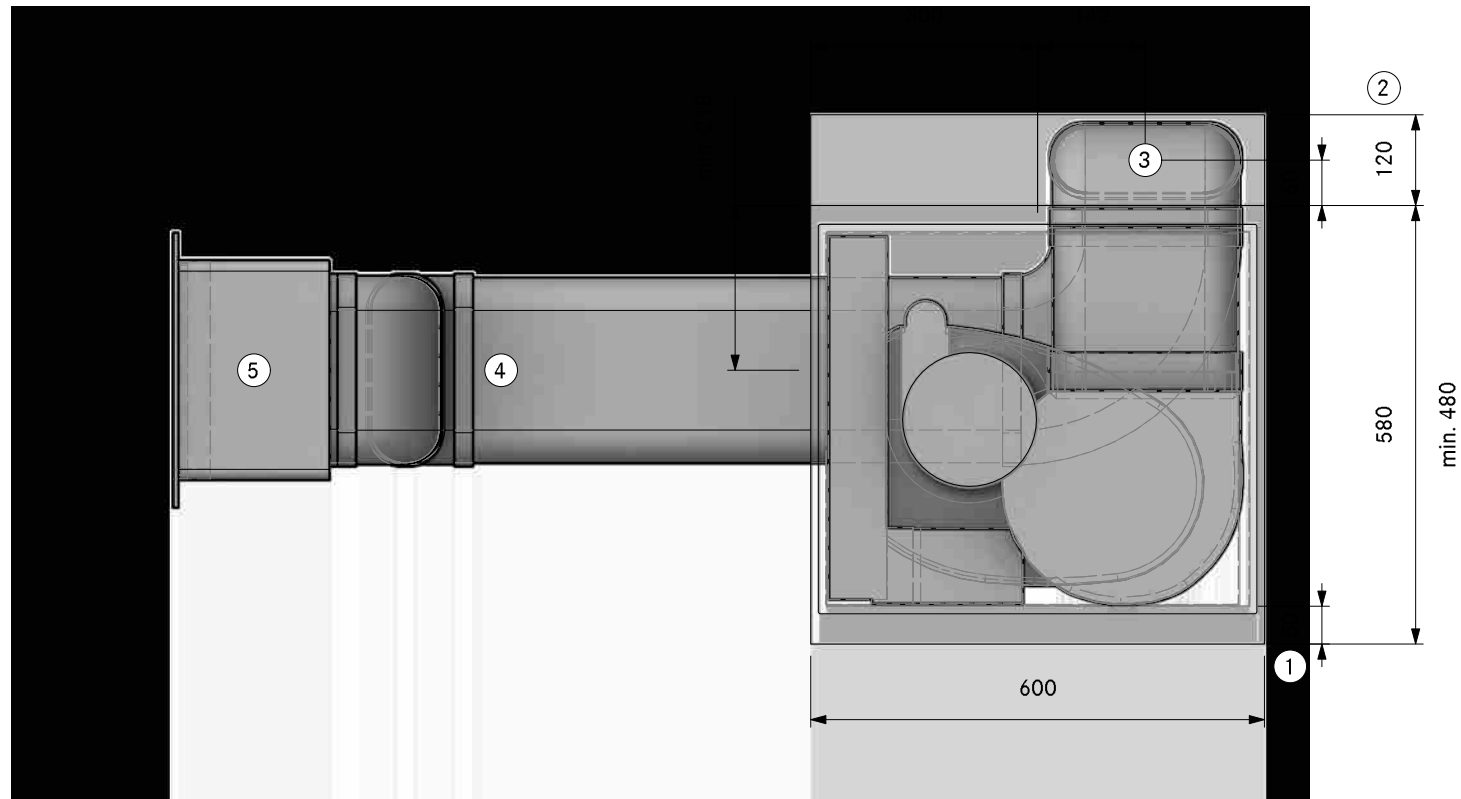

①. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.

②. Min. space required

③. Connection point Ecotube

④. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required

⑤. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA30430**  
**SPure Floor left swan neck UEBF**

LAYOUT

**SA**

Version, 1.0

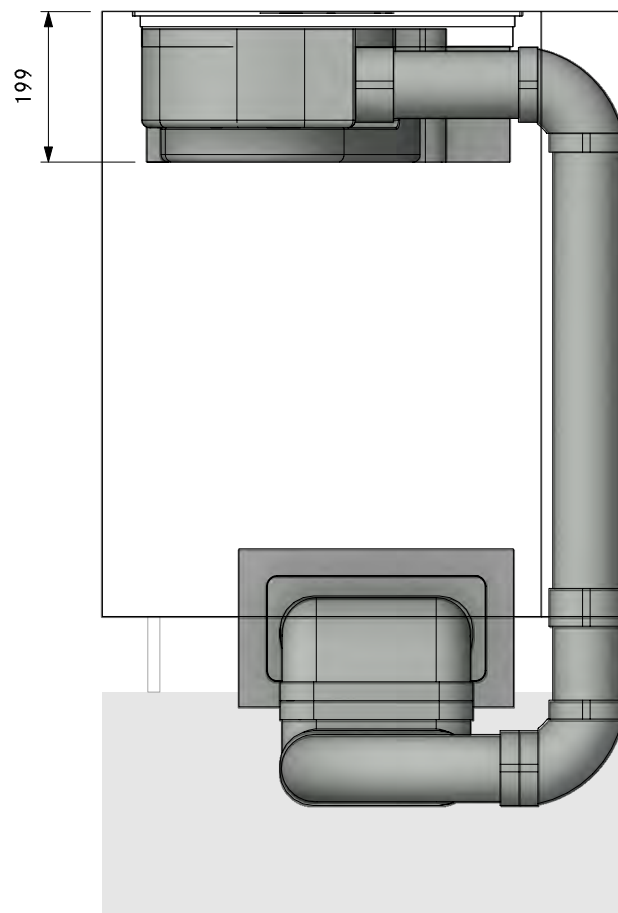

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


**SPA30430**  
**SPure Floor left swan neck UEBF**

Version, 1.0



LAYOUT

FA

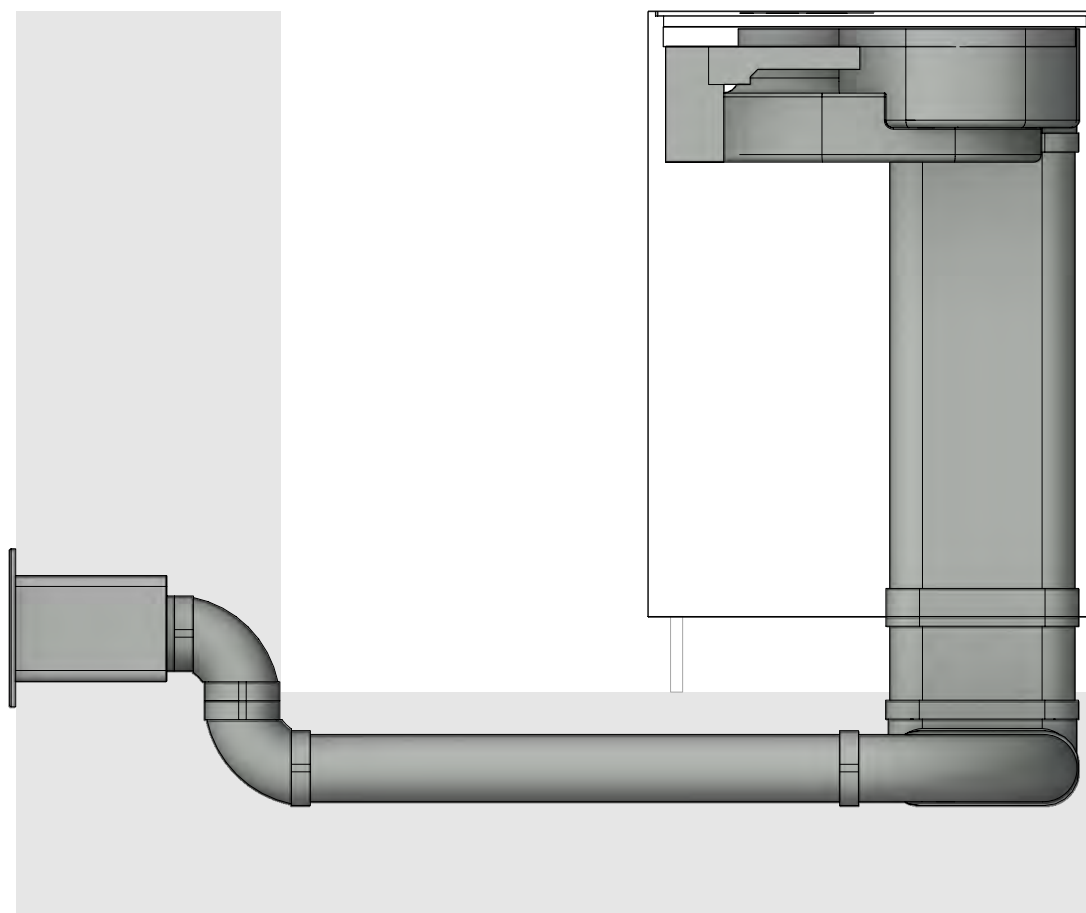

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


SPA30430  
SPure Floor left swan neck UEBF

Version, 1.0




LAYOUT

Detail

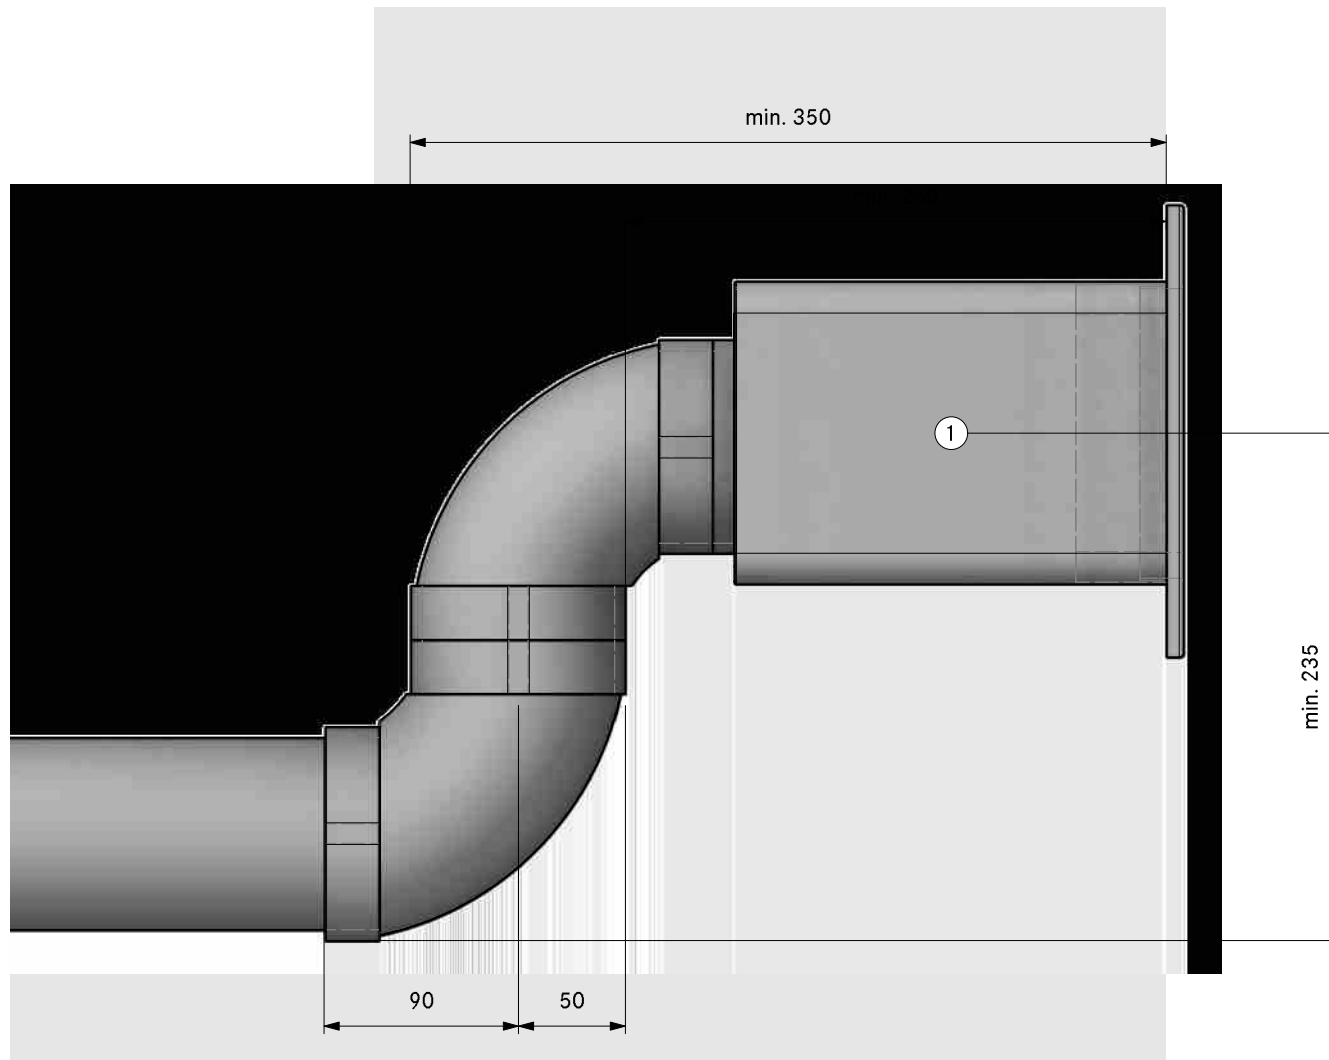


- ①. Hole size 310 x 155mm  
Wall vent must be able to fully  
open for air to extract



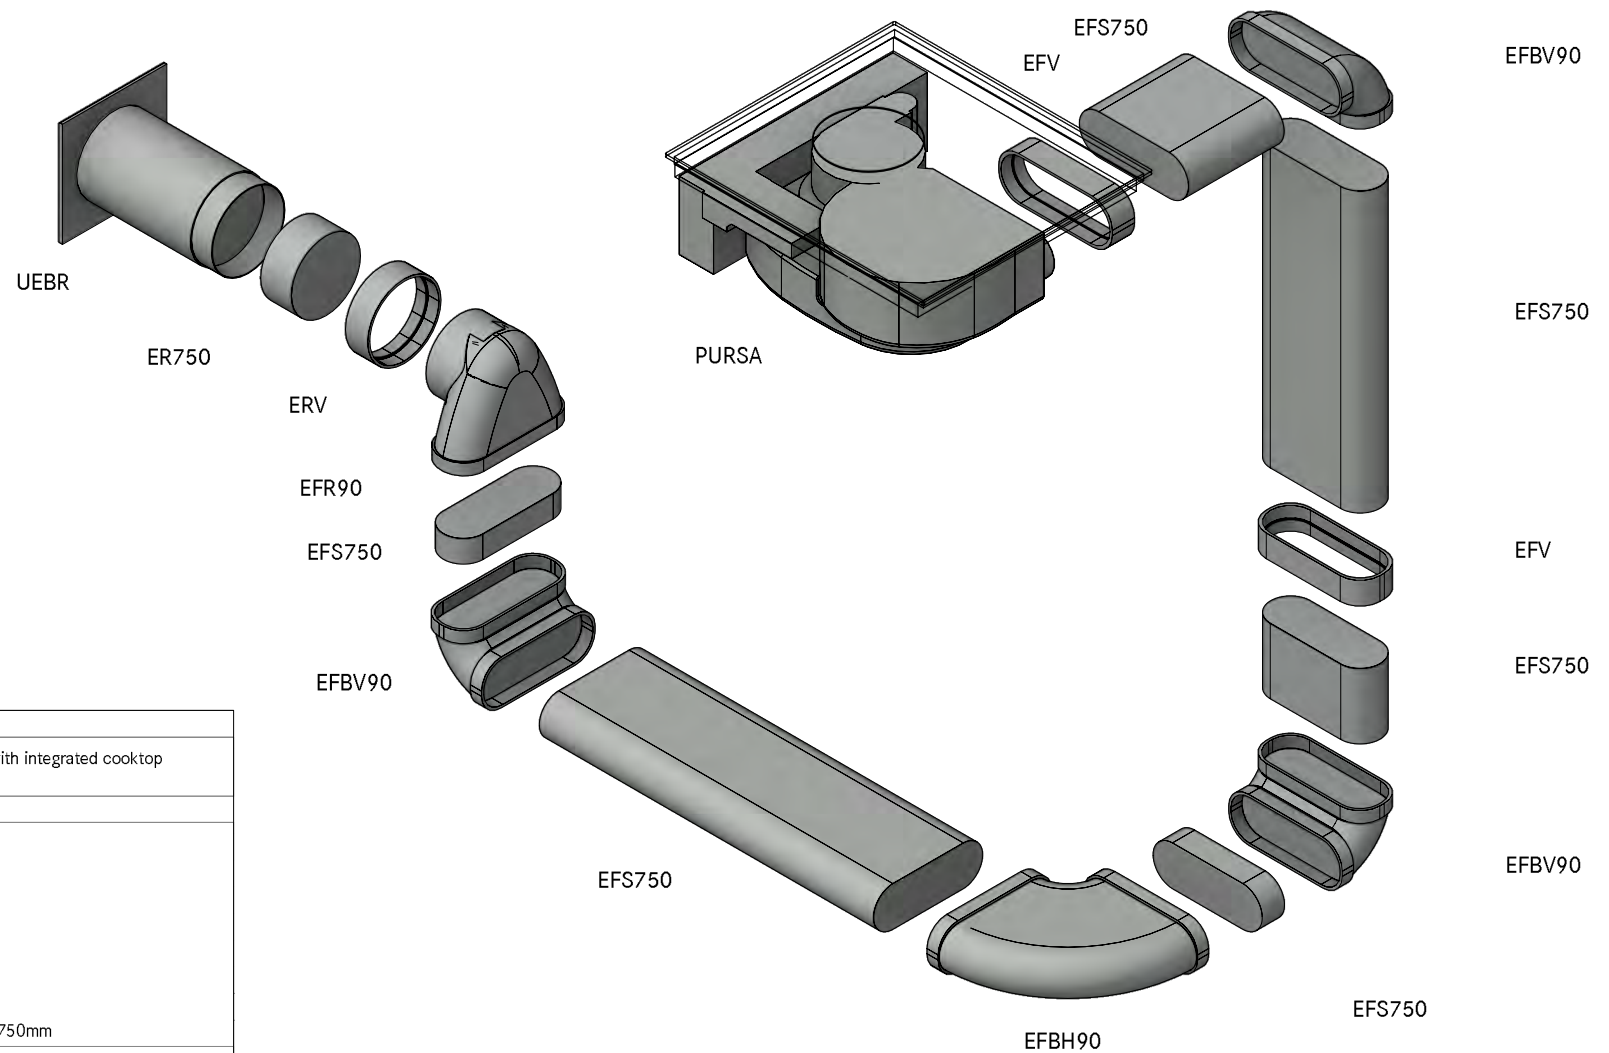

Count	Item BORA
1	PURSA S Pure induction cooktop with integrated cooktop extractor
	<b>Item BORA Ecotube</b>
1	EFBH90 90° bend flat horizontal
3	EFBV90 90° bend flat vertical
1	EFR90 transition flat round 90°
2	EFV duct connection flat
1	ERV duct connection round
1	UEBR 3box wall sleeve round
1	ER750 round duct 750mm
3	EF5750 shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.	

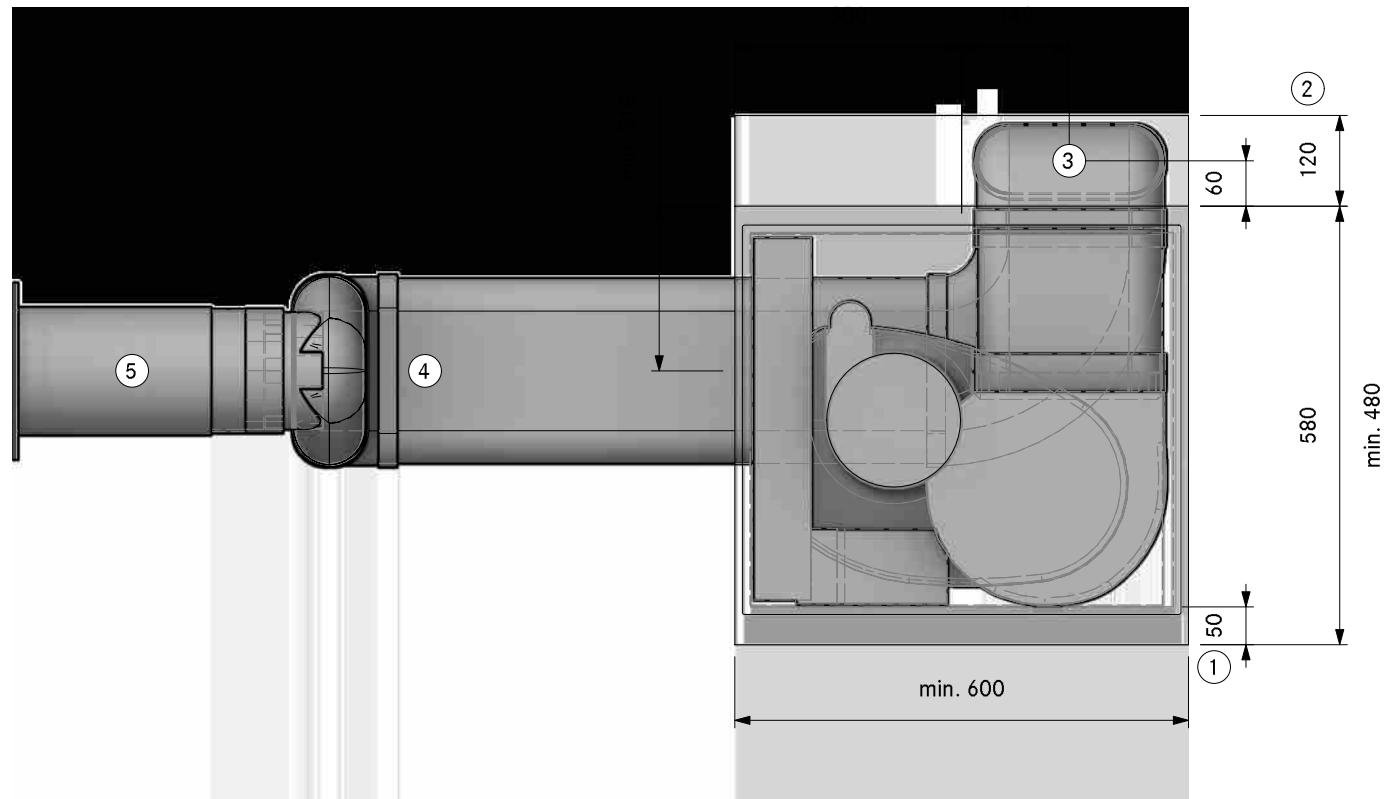

①. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.

②. Min. space required

③. Connection point Ecotube

④. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required

⑤. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA30440**  
**SPure Floor left swan neck UEBR**

LAYOUT

**SA**

Version, 1.0

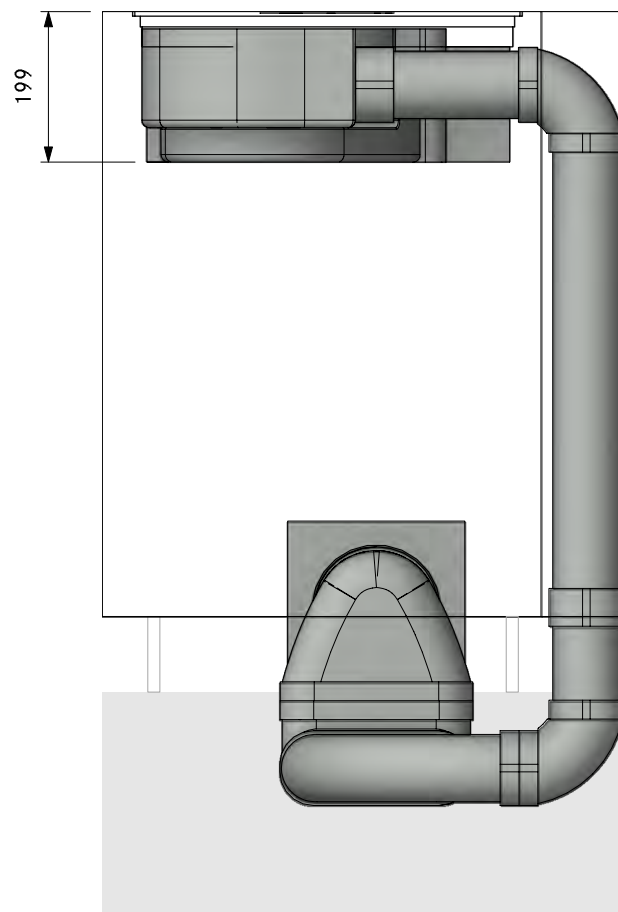




MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA30440**  
**SPure Floor left swan neck UEBR**

LAYOUT

FA

Version, 1.0

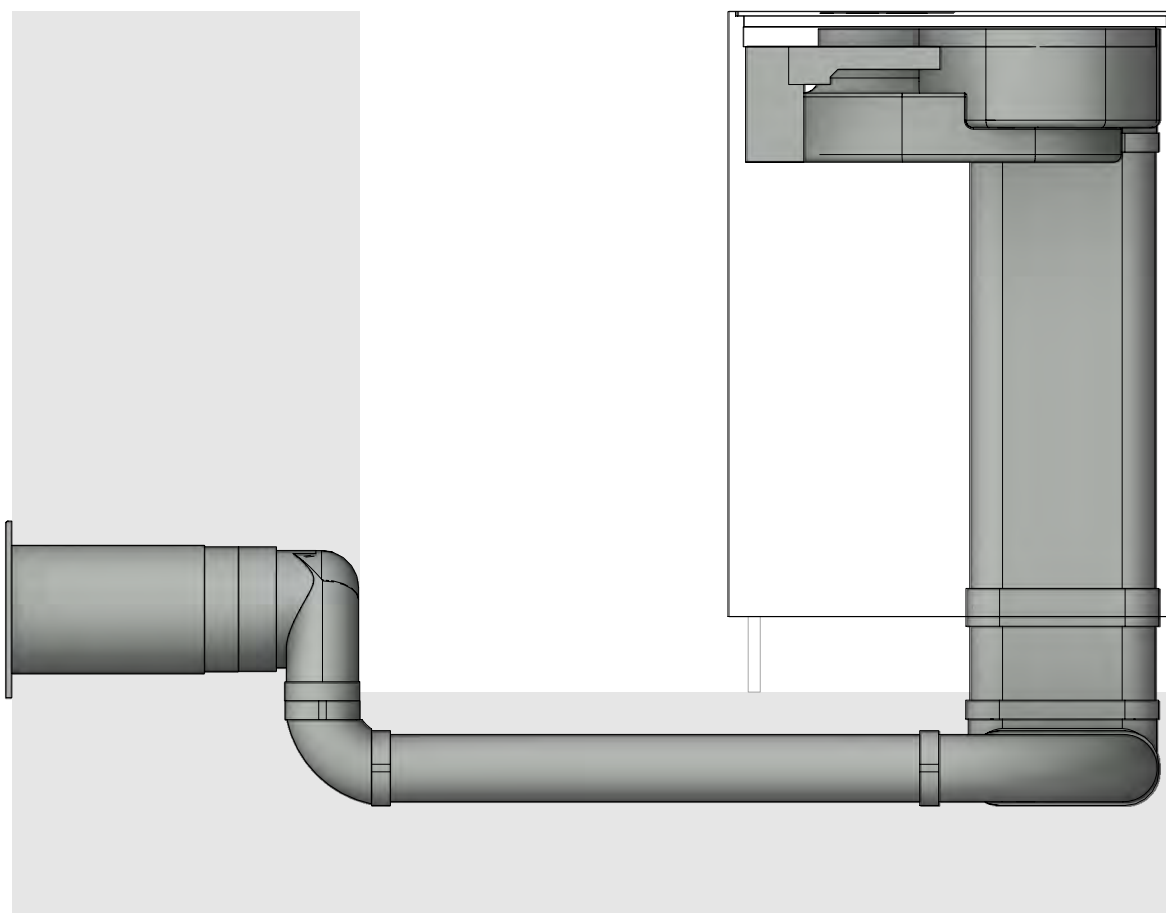

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


SPA30440  
SPure Floor left swan neck UEBR

Version, 1.0



LAYOUT


Detail

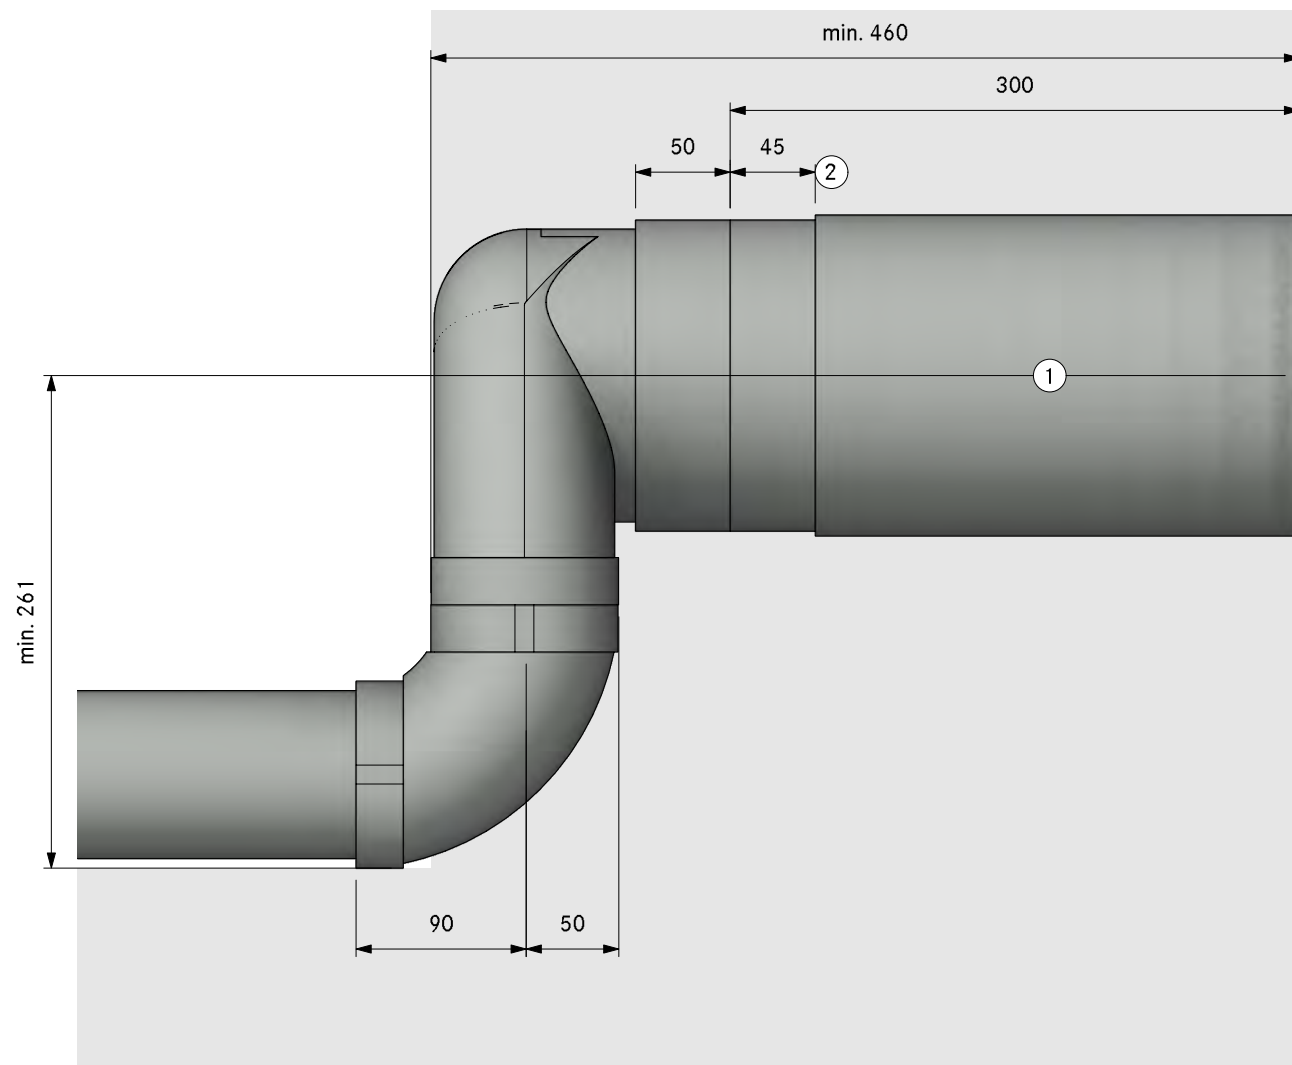

- ①. Hole size min. Ø180mm.  
Wall vent must be able to fully  
open for air to extract
- ②. Bushing length 45mm (can be  
shortened by 20mm)

# Cellar

direction of the ducting to the back . . . . .	192
direction of the ducting to the right . . . . .	204
direction of the ducting to the front. . . . .	216
direction of the ducting to the left. . . . .	228

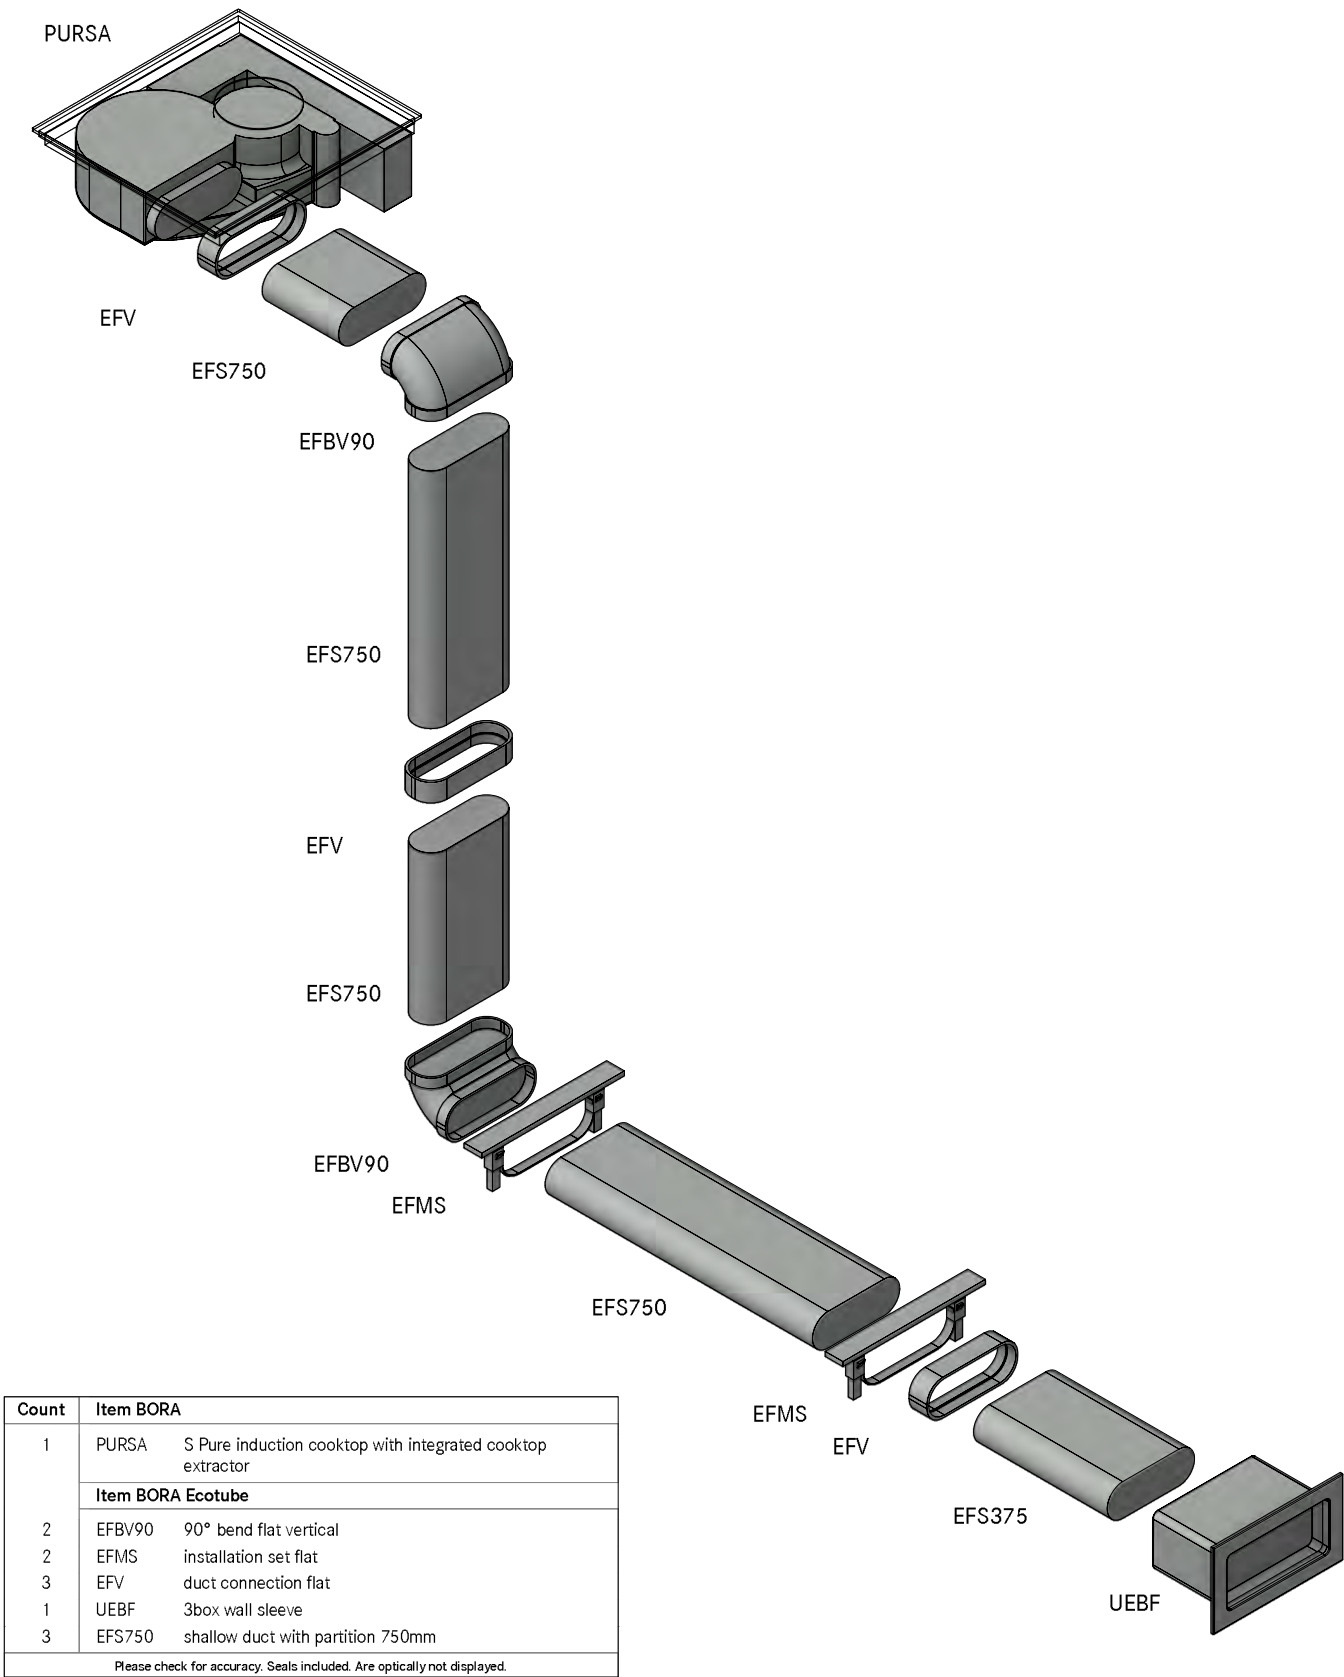


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA40110  
SPure Cellar back UEBF

LAYOUT

GR HK

- ①. At least  
distance  
Please  
manufa  
distan
- ②. Min. sp
- ③. Hole si
- ④. One mo  
length  
recomm  
connec
- ⑤. Hole si  
Wall ve  
open fo

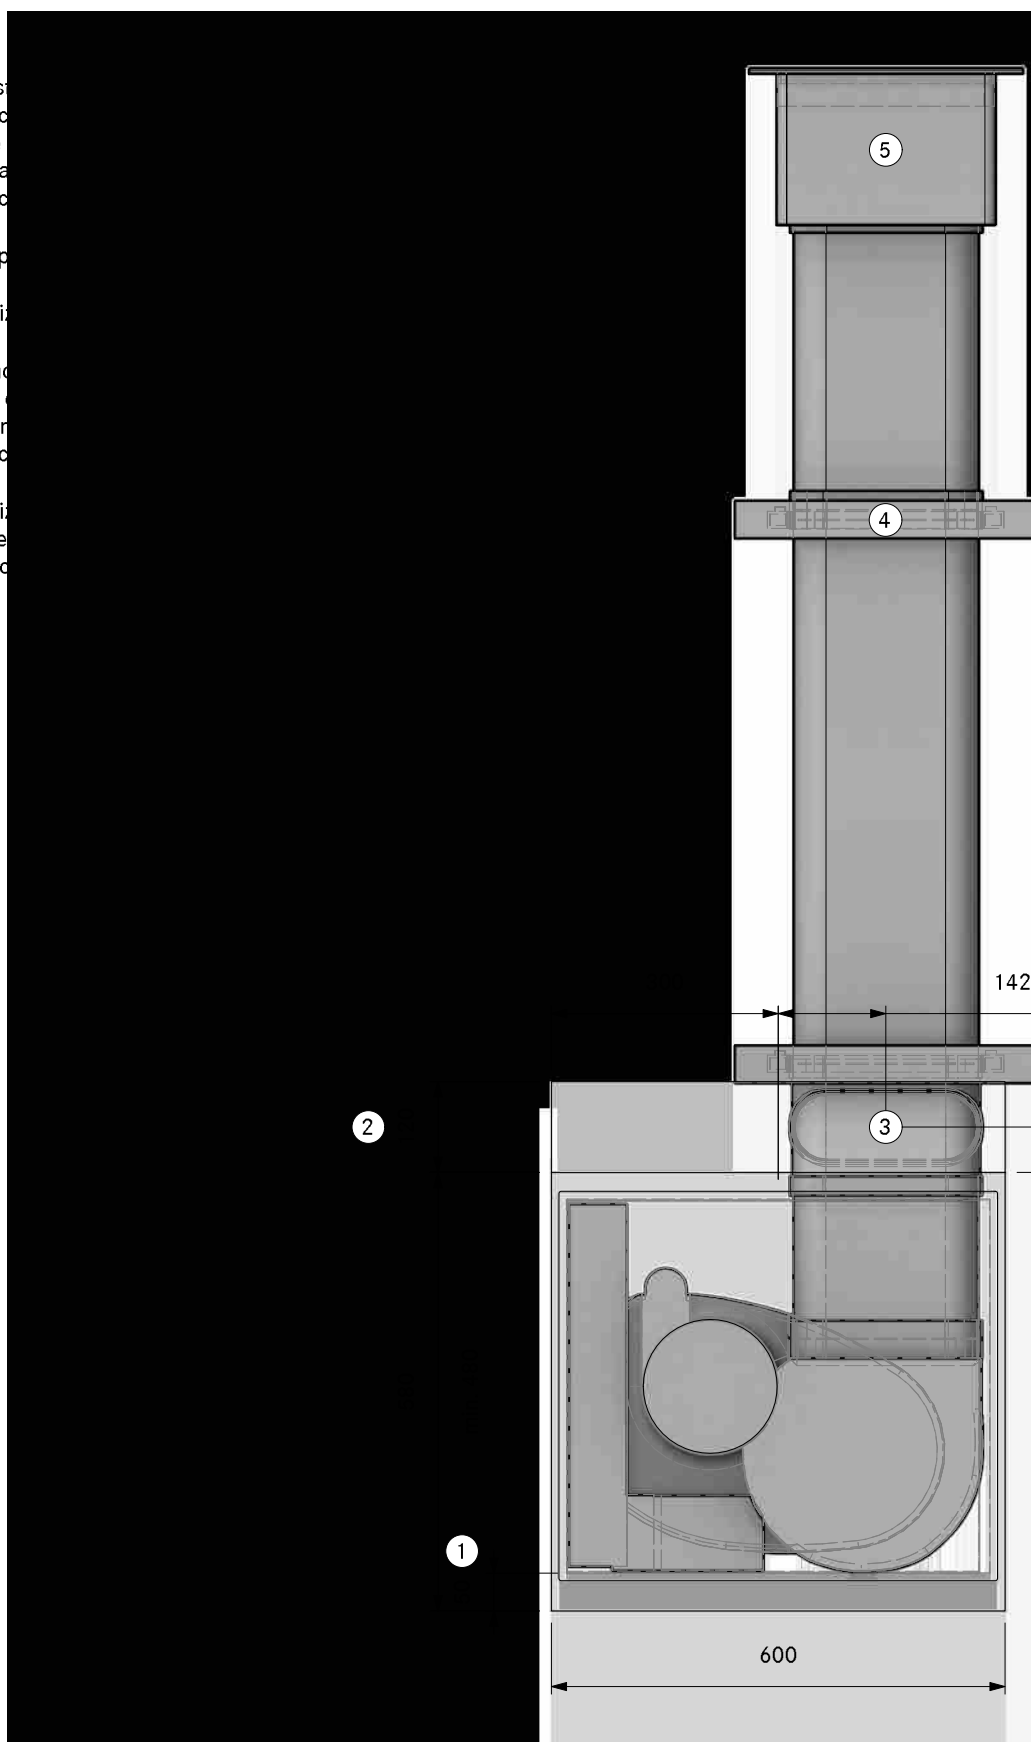


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA40110**  
**SPure Cellar back UEBF**

LAYOUT

**SA**

Version, 1.0

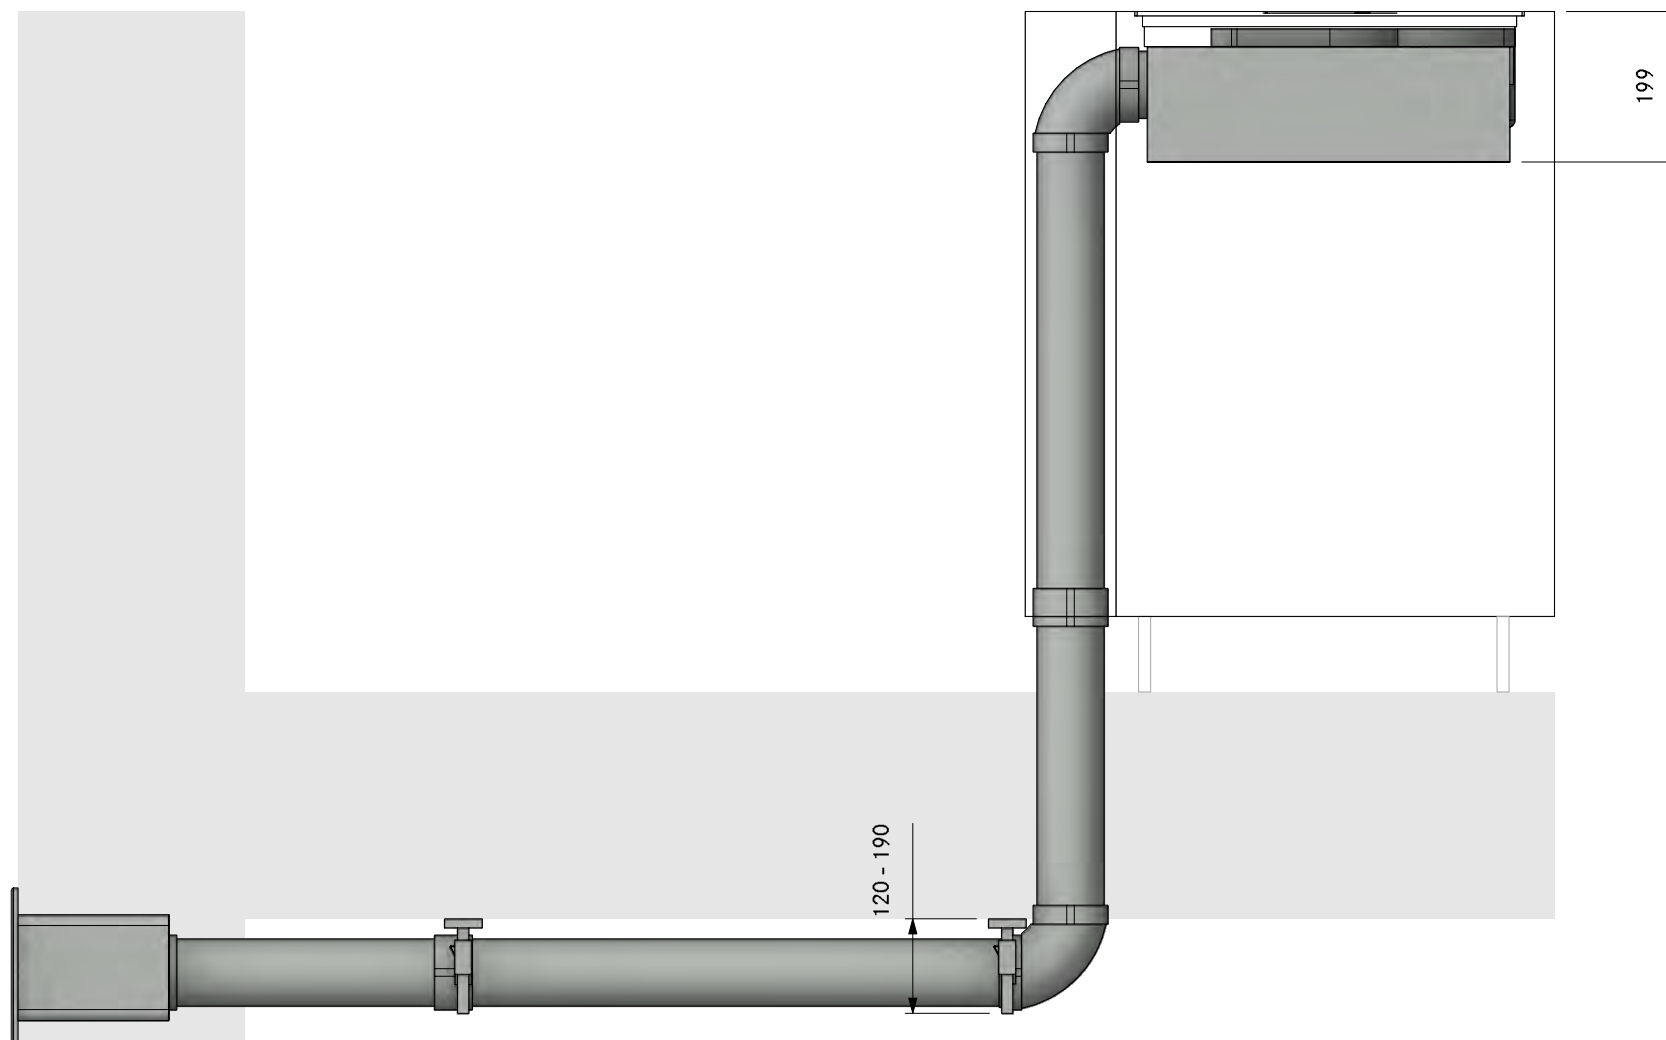


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA40110**  
**SPure Cellar back UEBF**

LAYOUT

**FA**

Version, 1.0

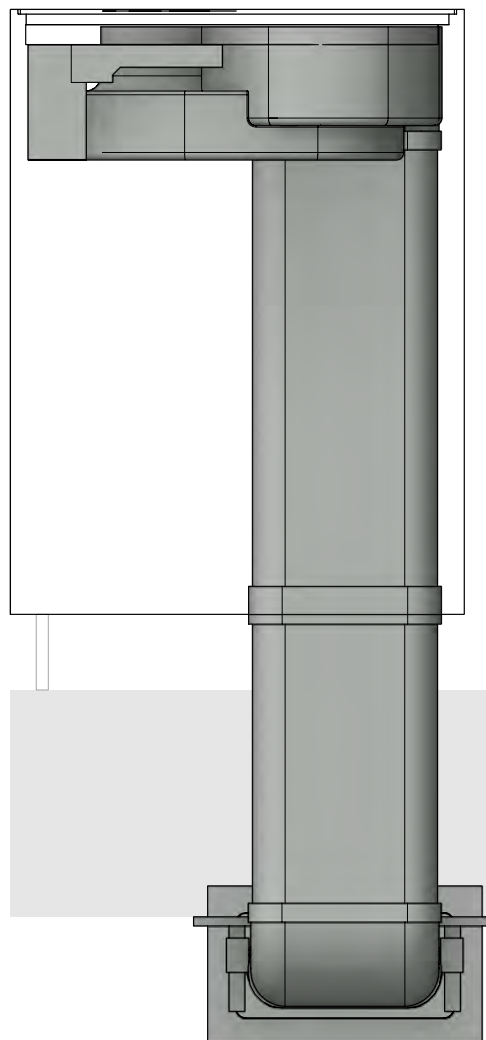


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA40110  
SPure Cellar back UEBF

LAYOUT


Detail

Version, 1.0

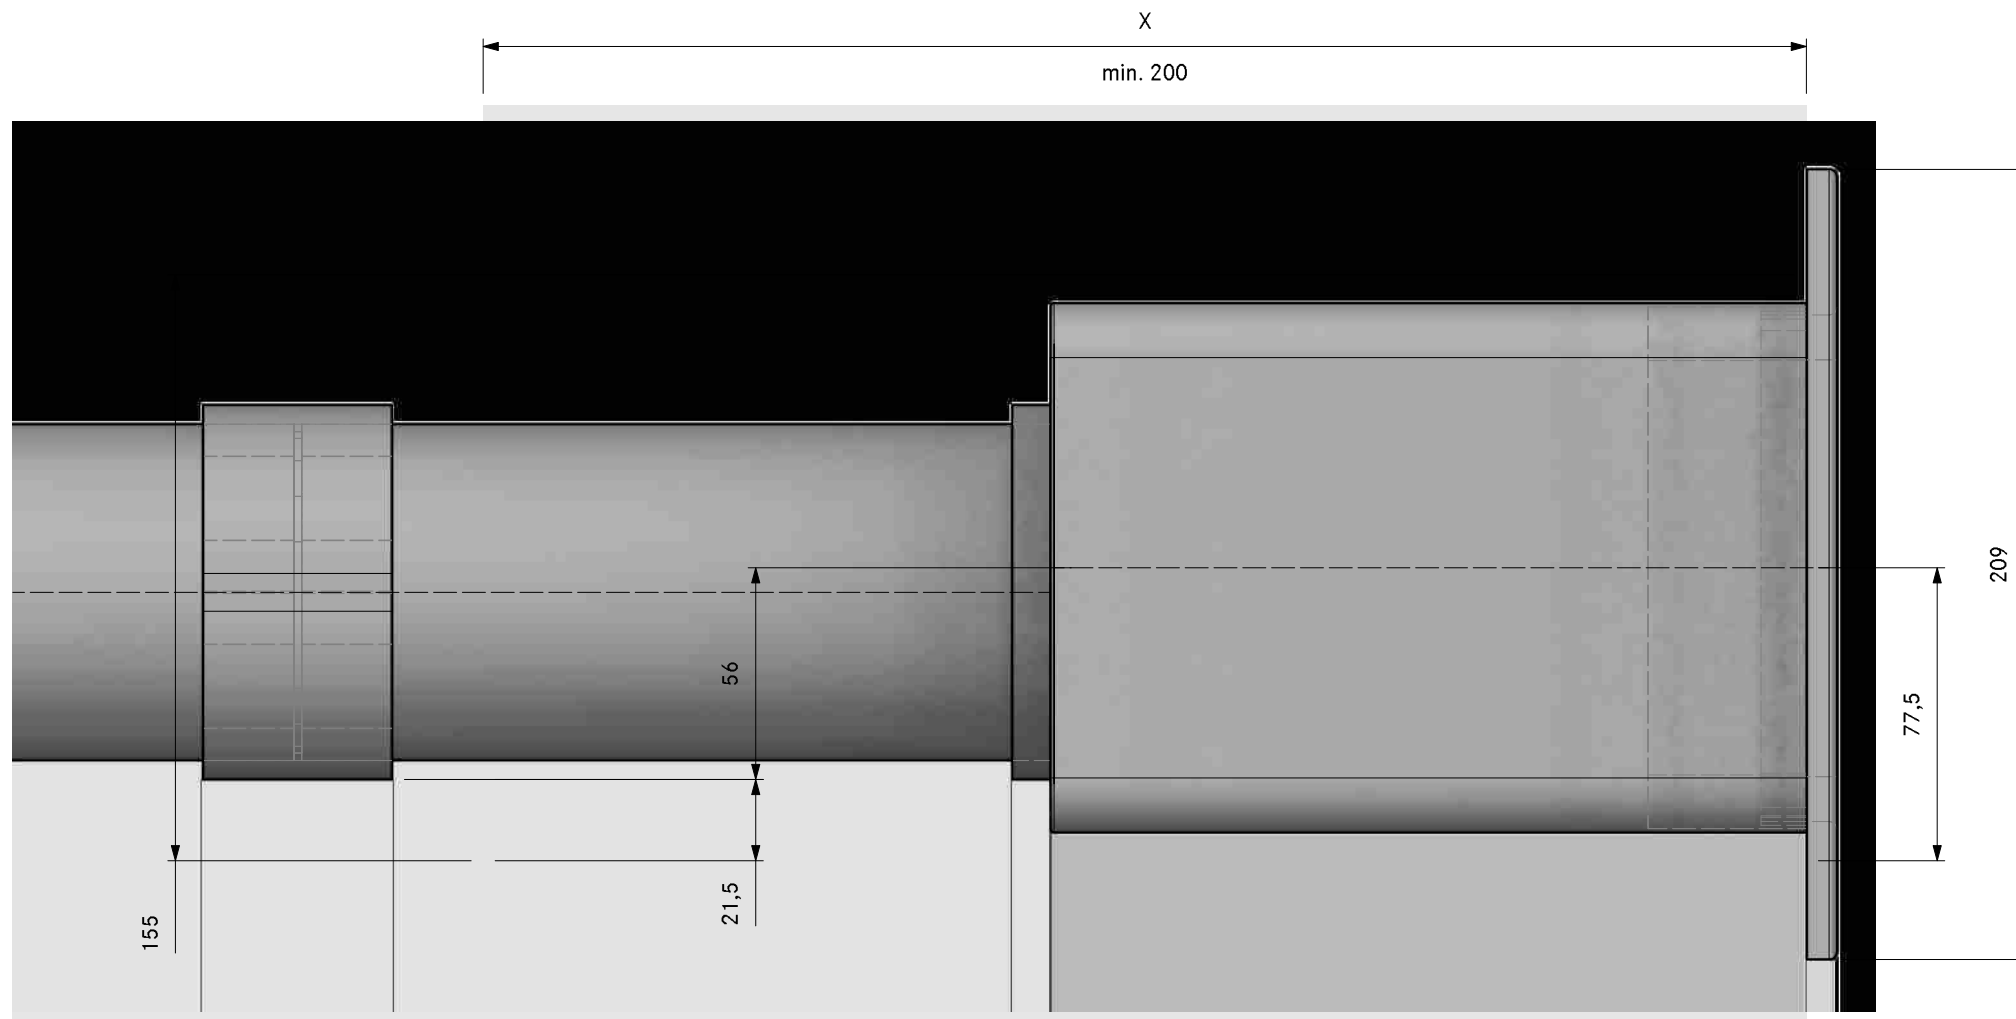





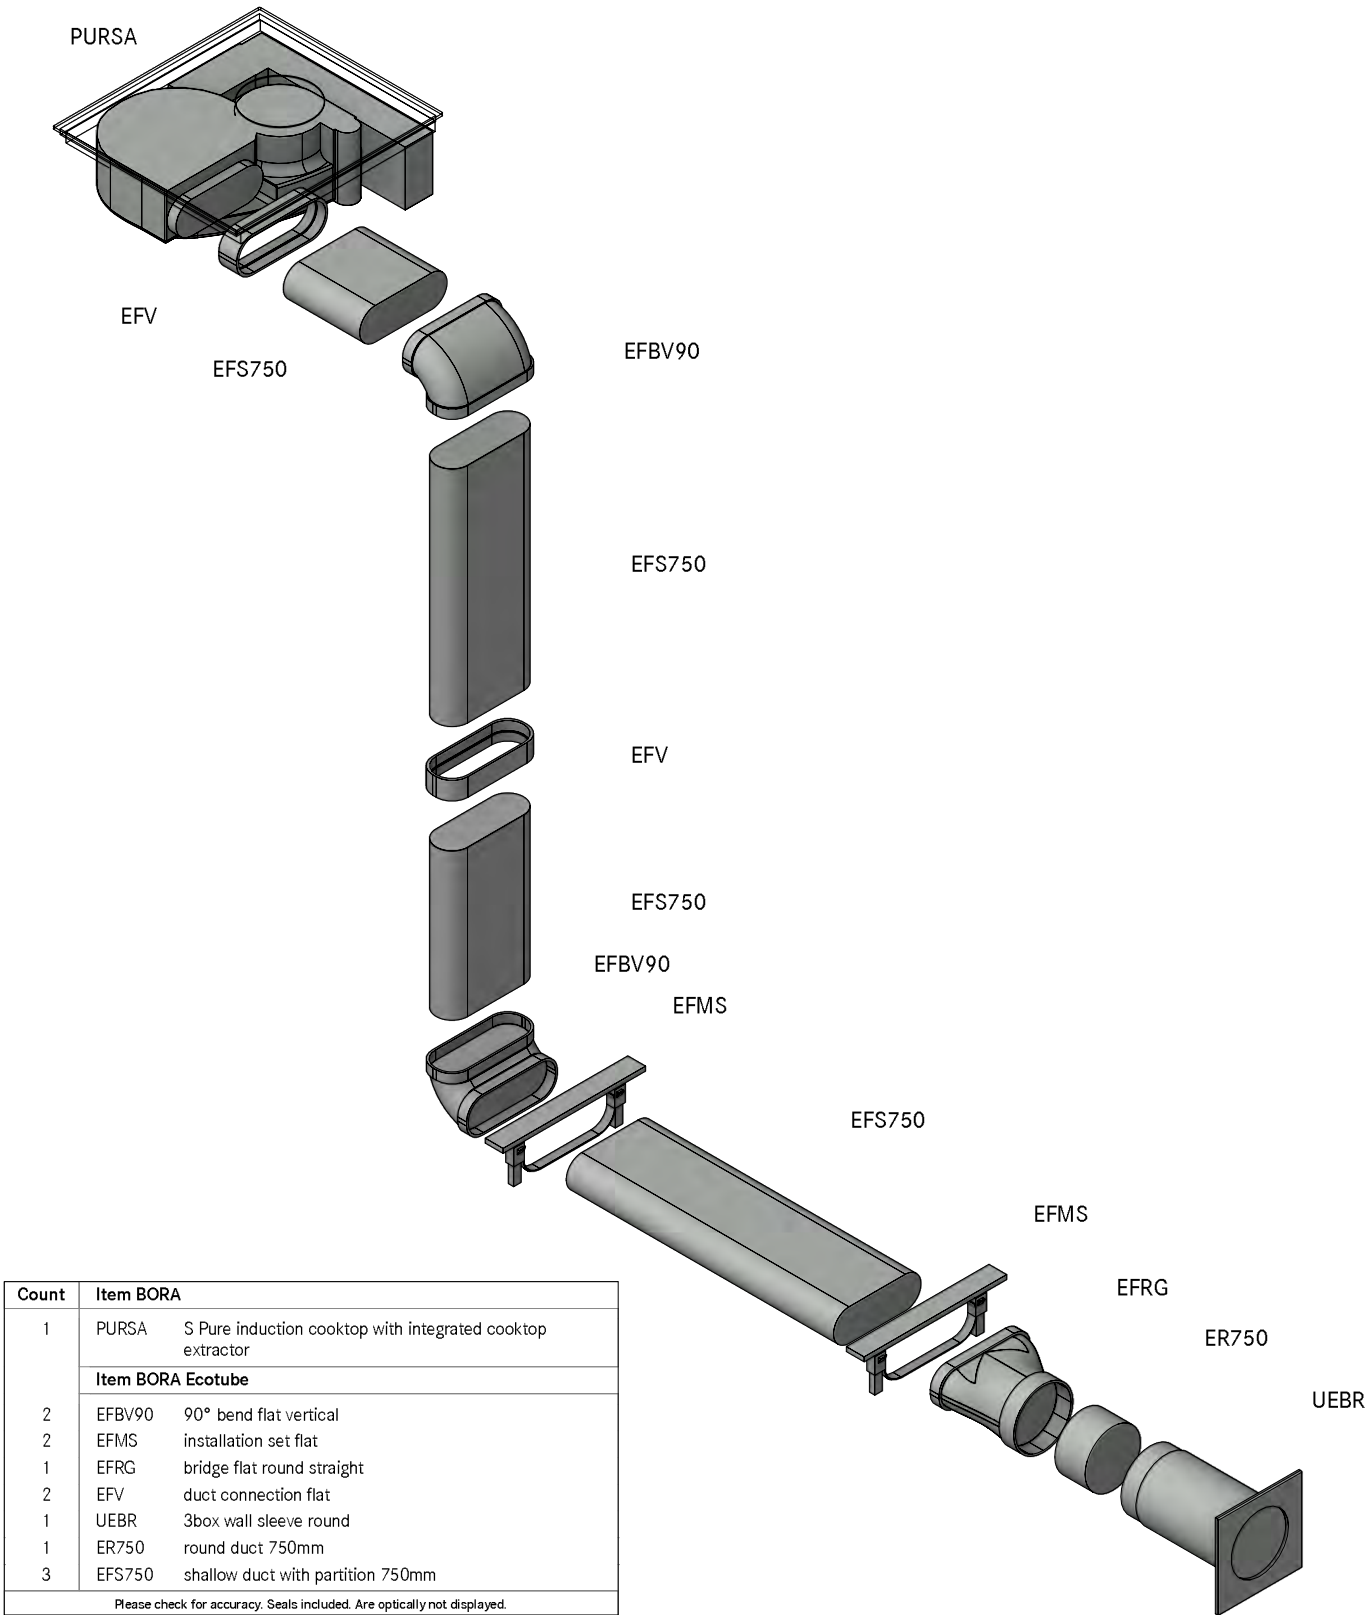

MODELPLAN

REFERENCE NUMBER

COMPOSITION


LAYOUT

SPA40120

SPA40120

G

- ① At least 50 mm to cut distance is a recommended. Please contact your wall manufacturer for the exact distance.
- ② Min. space required
- ③ Hole size at least 110 mm
- ④ One mounting bracket length of Ecotube is recommended, position connection sleeve
- ⑤ Hole size min. Ø180mm. Wall vent must be able to open for air to extract

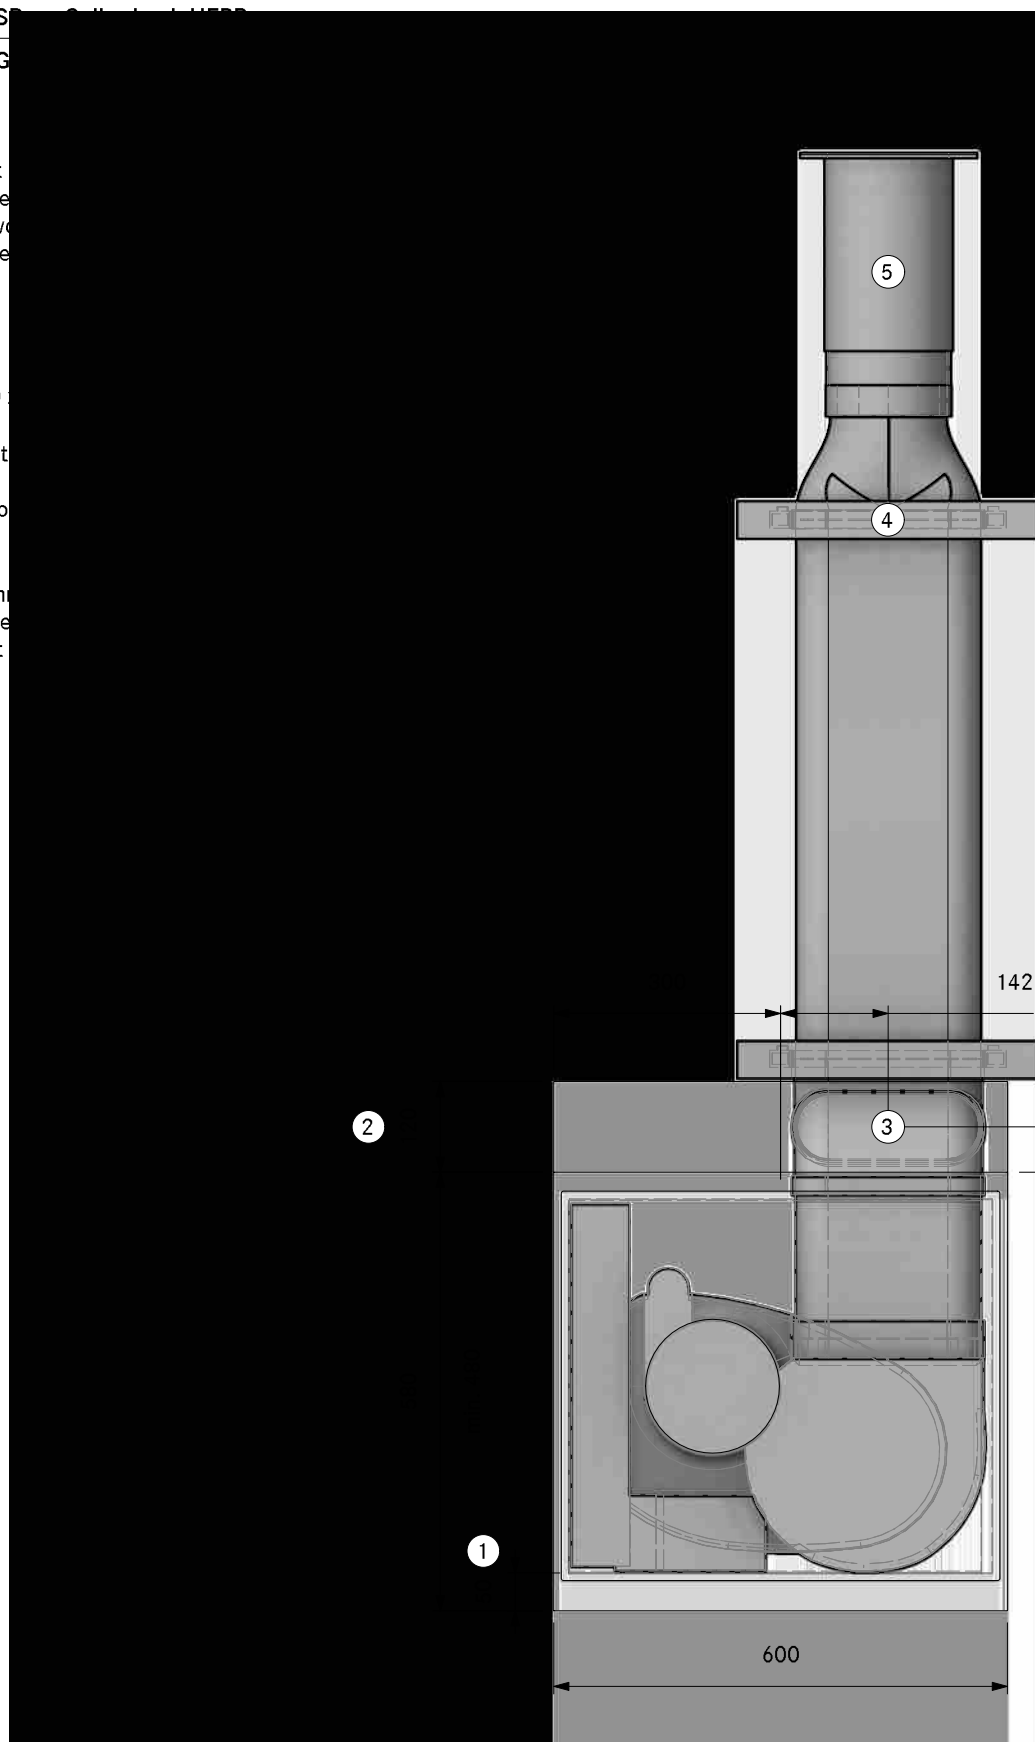

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


**SPA40120**  
**SPure Cellar back UEBR**

Version, 1.0



LAYOUT

**SA**

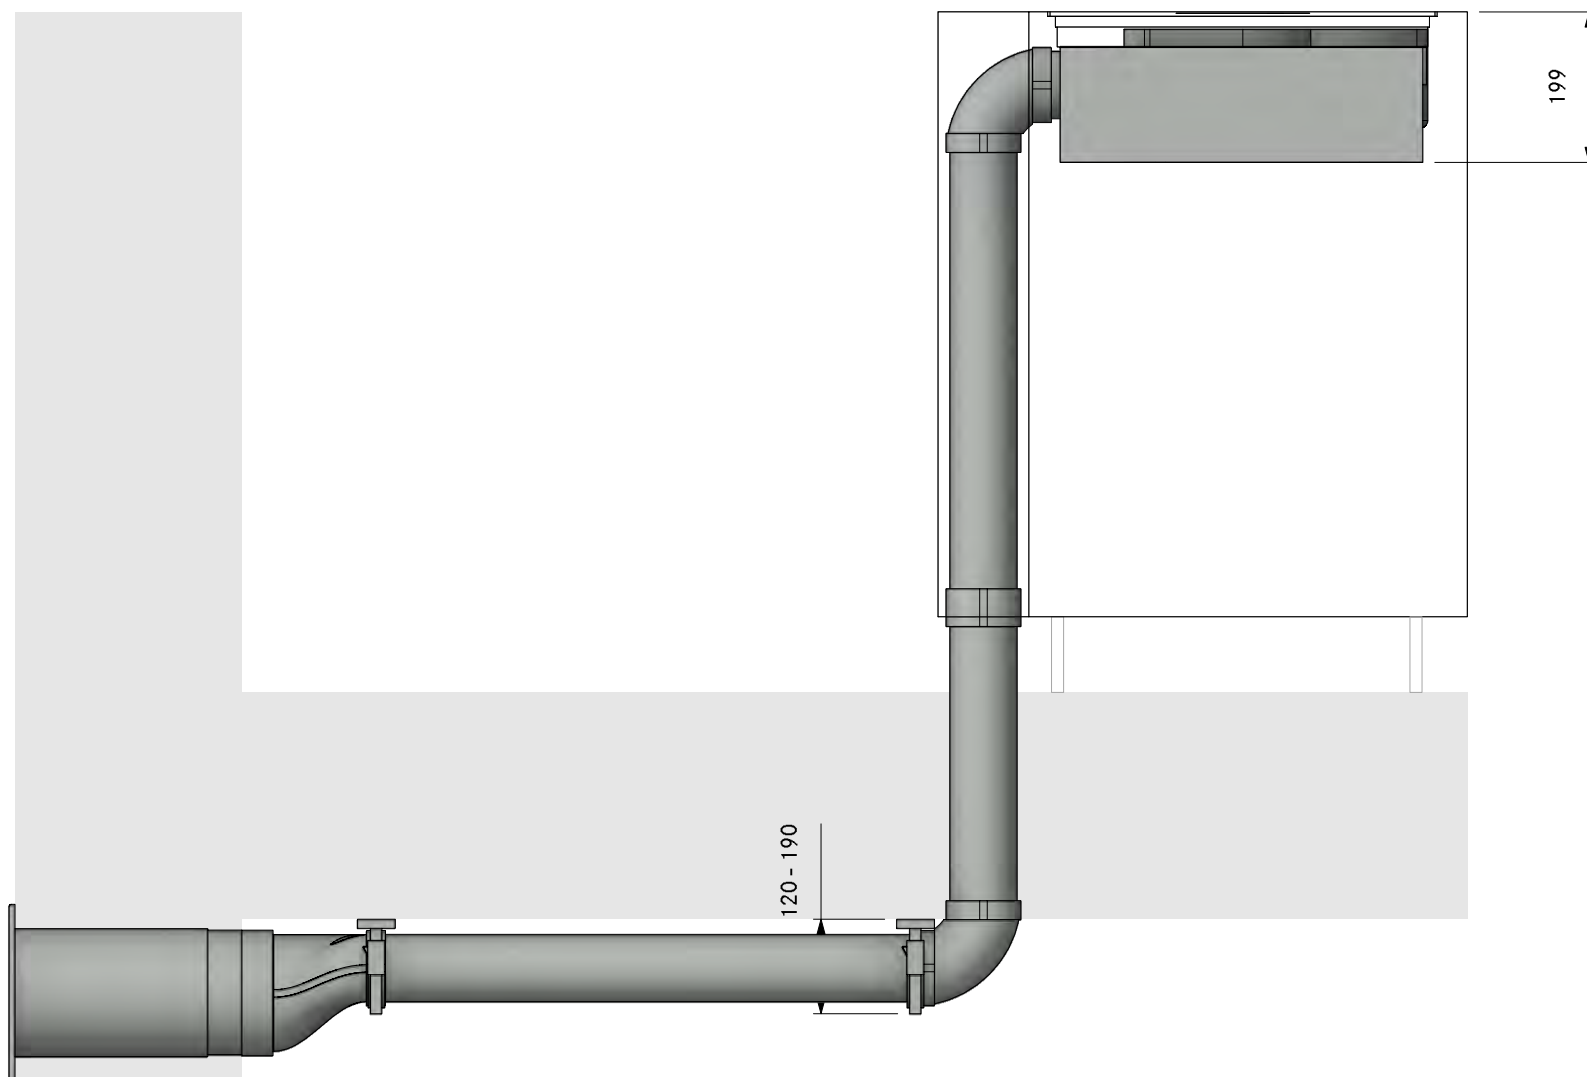


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA40120**  
**SPure Cellar back UEBR**

LAYOUT


FA

Version, 1.0

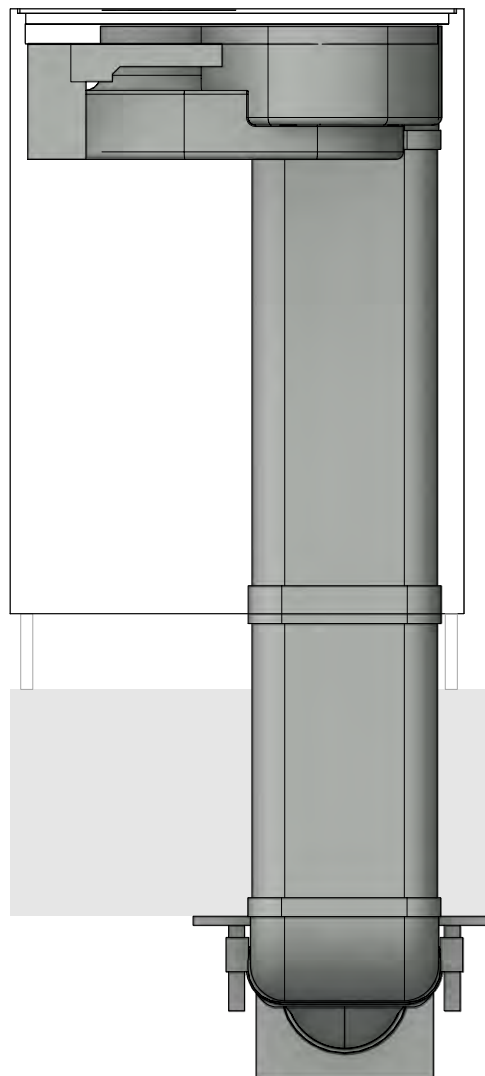


LAYOUT


Detail

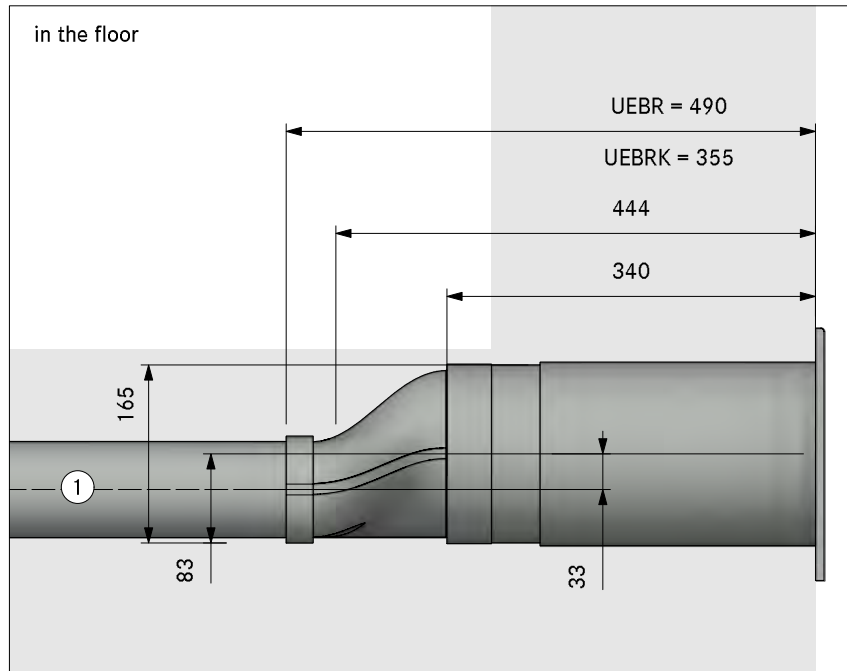

in the plinth area

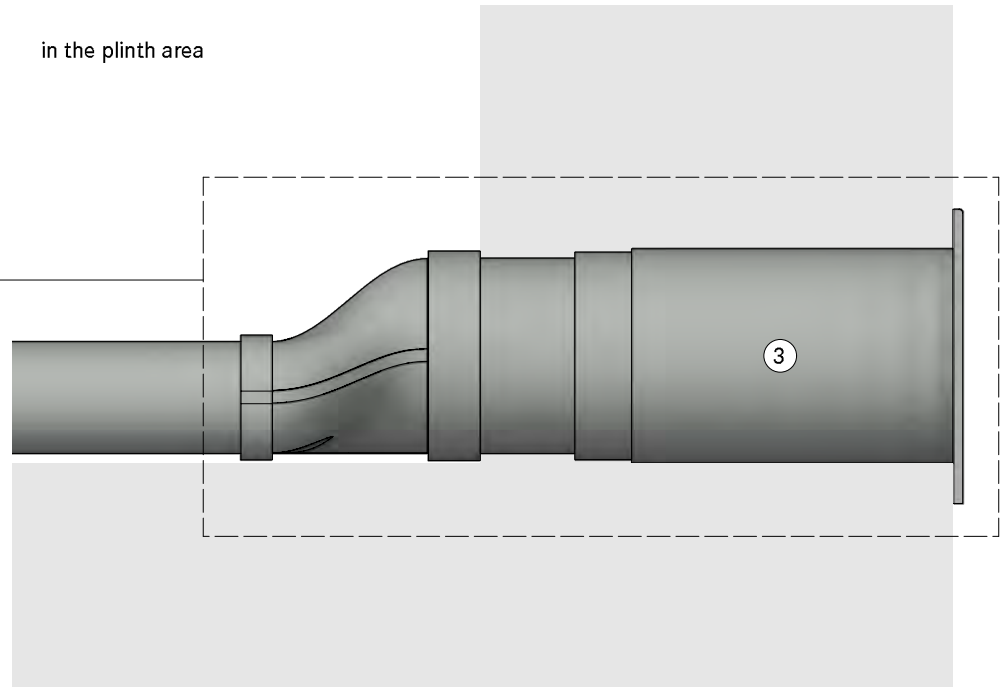


in the cellar

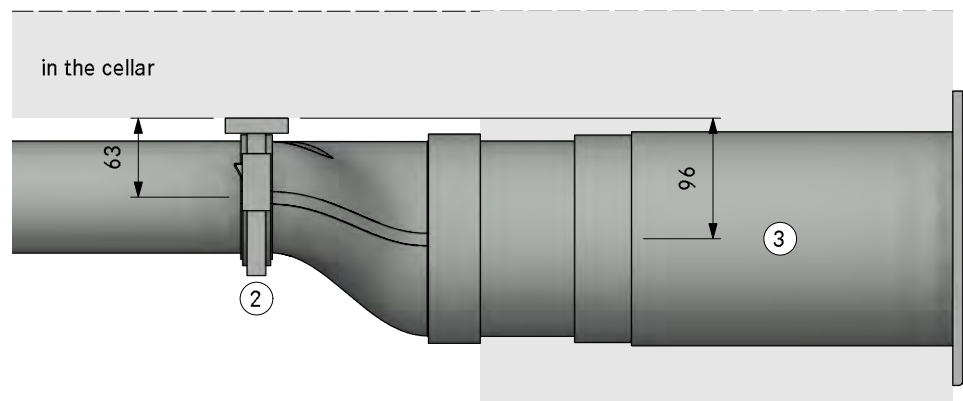


- ①. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
- ②. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
- ③. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract



Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
1	EFBH90	90° bend flat horizontal
2	EFBV90	90° bend flat vertical
2	EFMS	installation set flat
3	EFV	duct connection flat
1	UEBF	3box wall sleeve
3	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

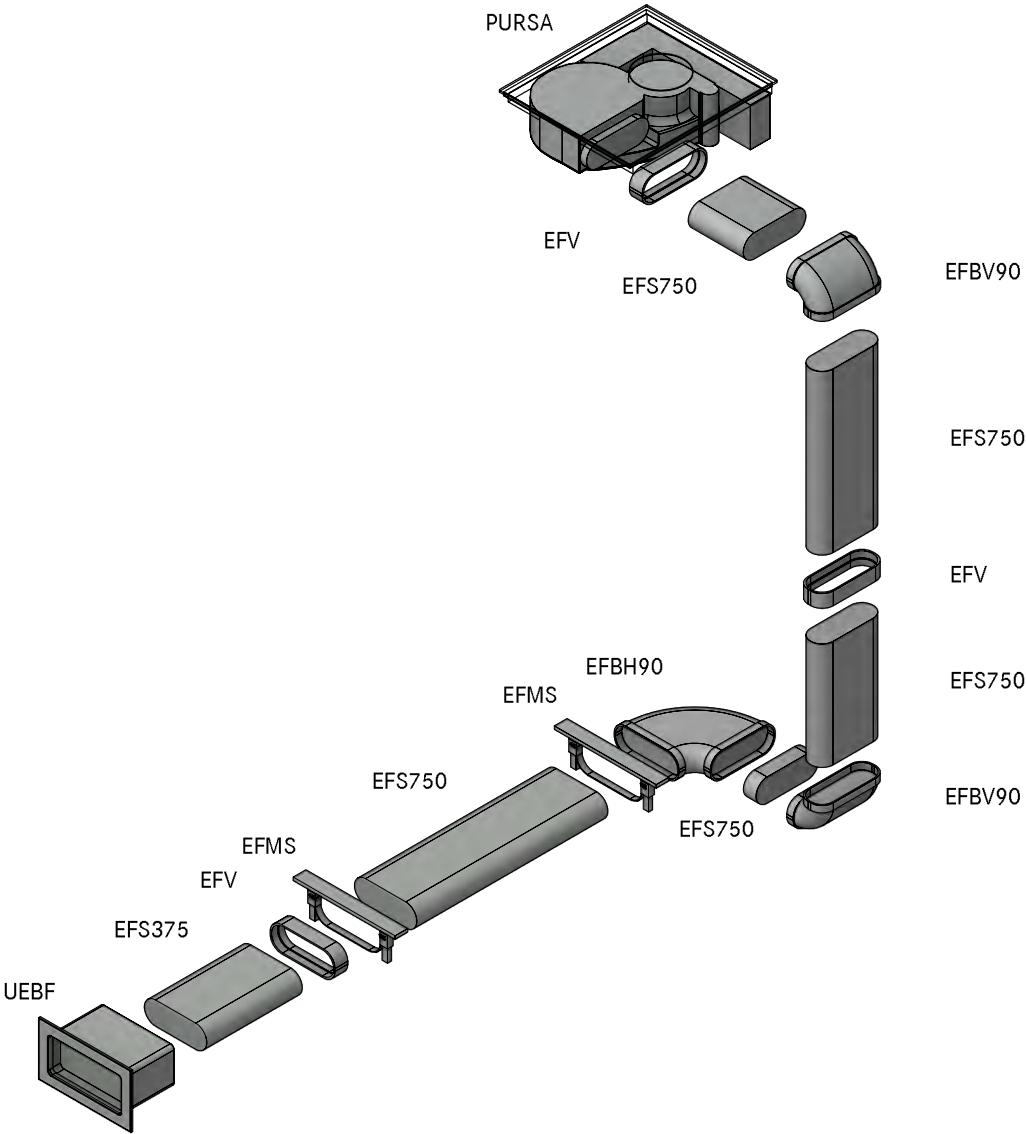



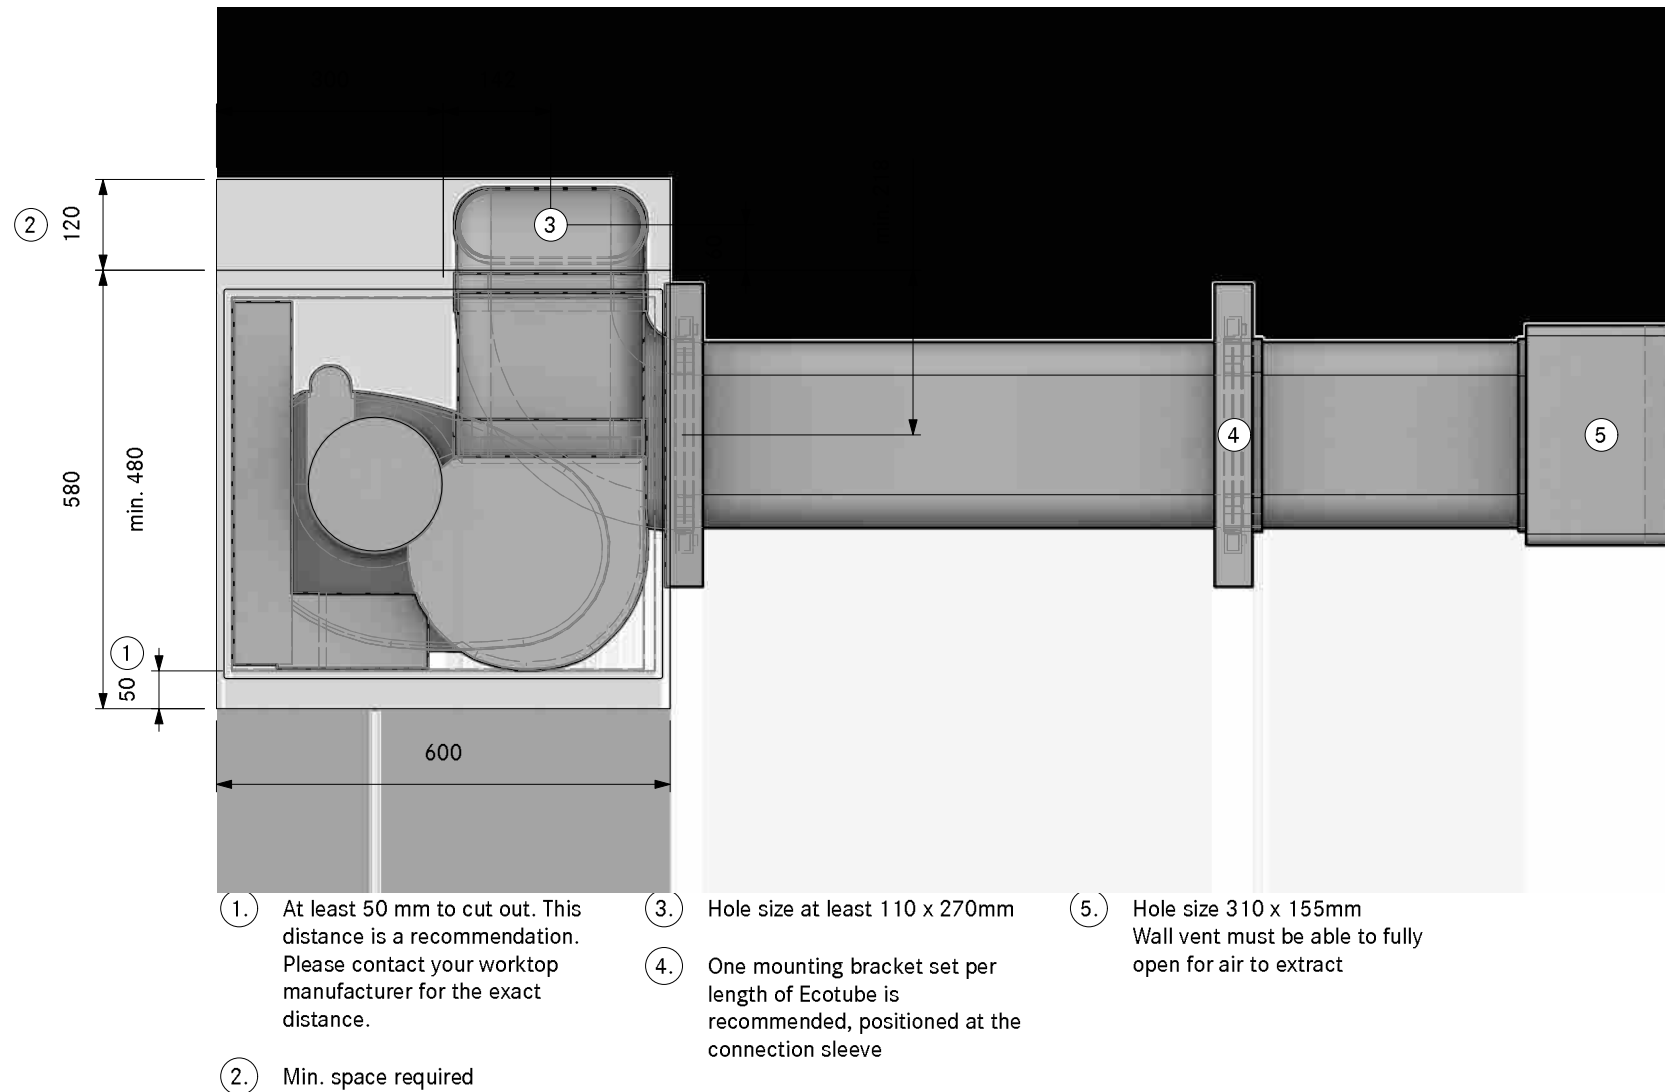


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA40210**  
**SPure Cellar right UEBF**

LAYOUT

**SA**

Version, 1.0

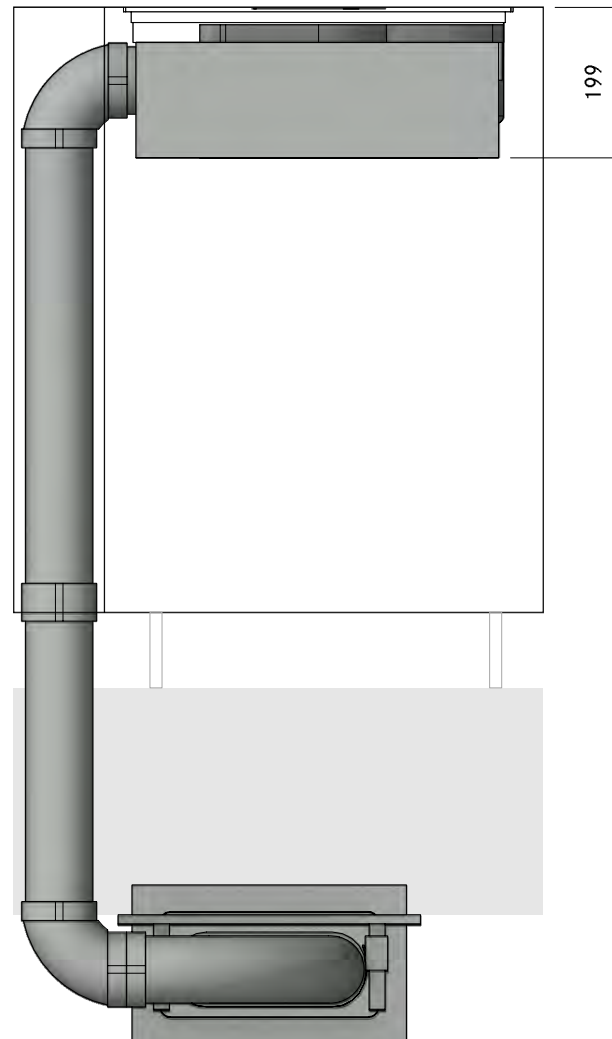


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA40210  
SPure Cellar right UEBF

LAYOUT

FA

Version, 1.0

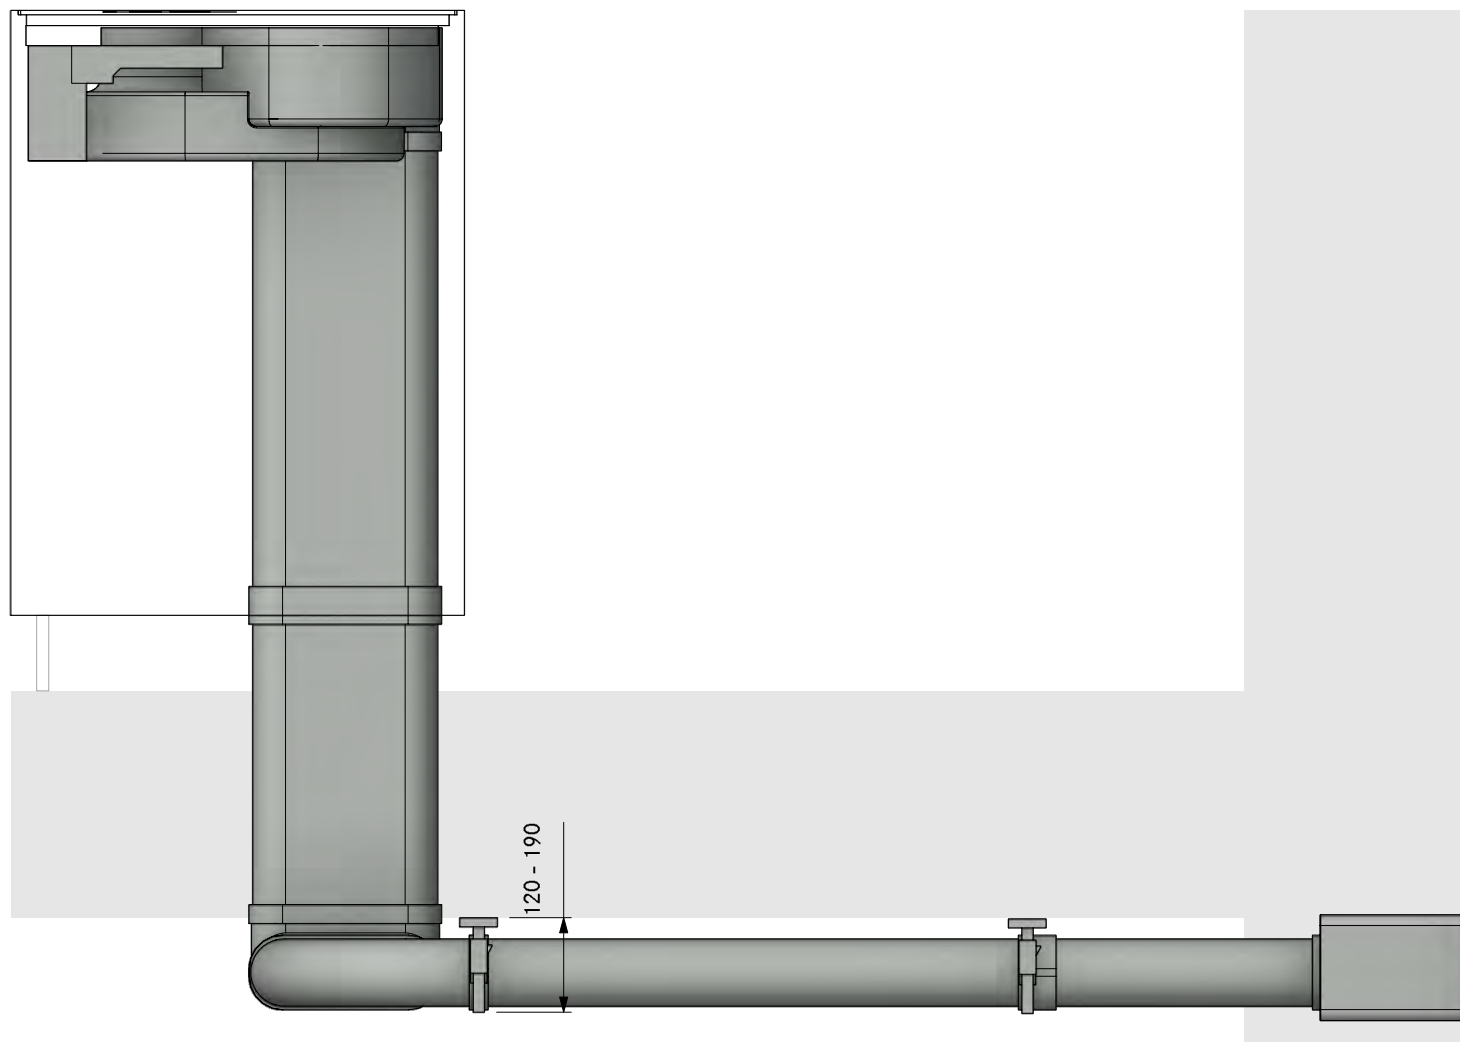


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA40210  
SPure Cellar right UEBF

LAYOUT


Detail


Version, 1.0

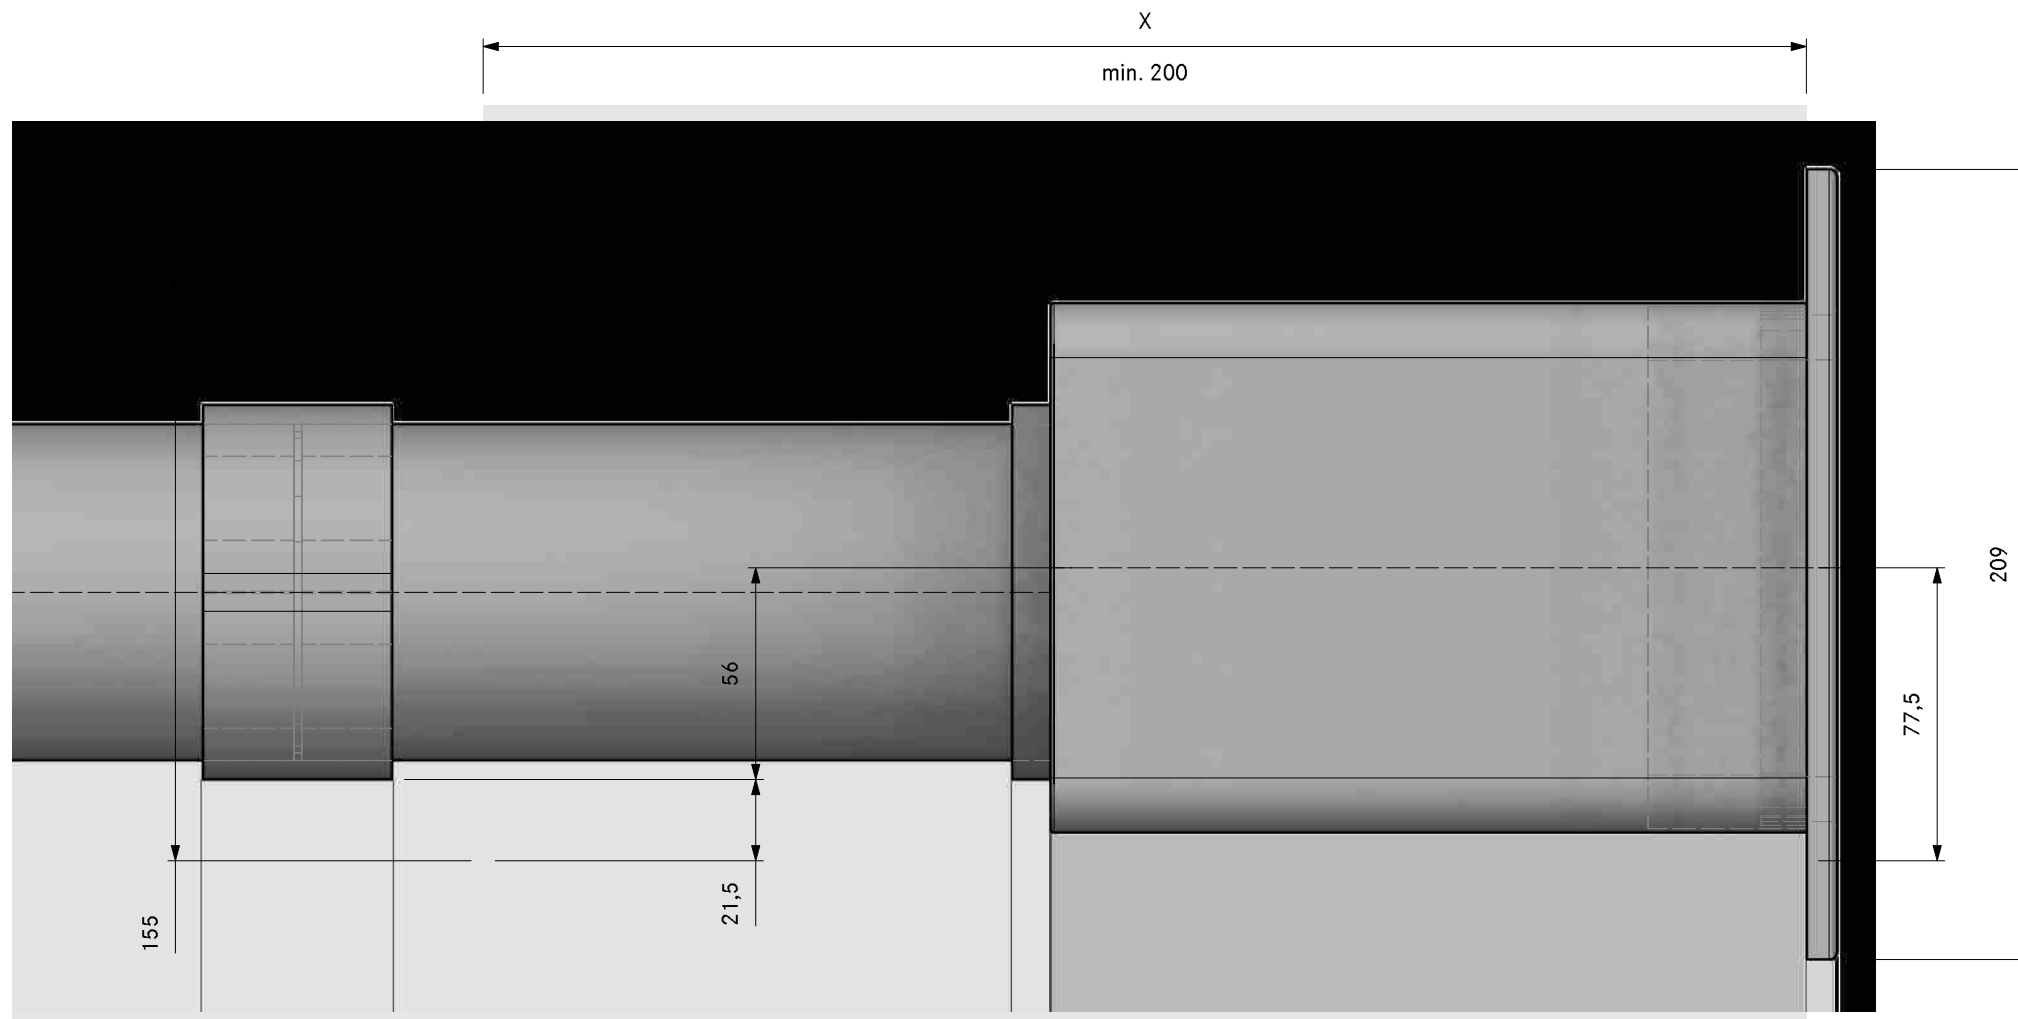



Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
1	EFBH90	90° bend flat horizontal
2	EFBV90	90° bend flat vertical
2	EFMS	installation set flat
1	EFRG	bridge flat round straight
2	EFV	duct connection flat
1	UEBR	3box wall sleeve round
1	ER750	round duct 750mm
3	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

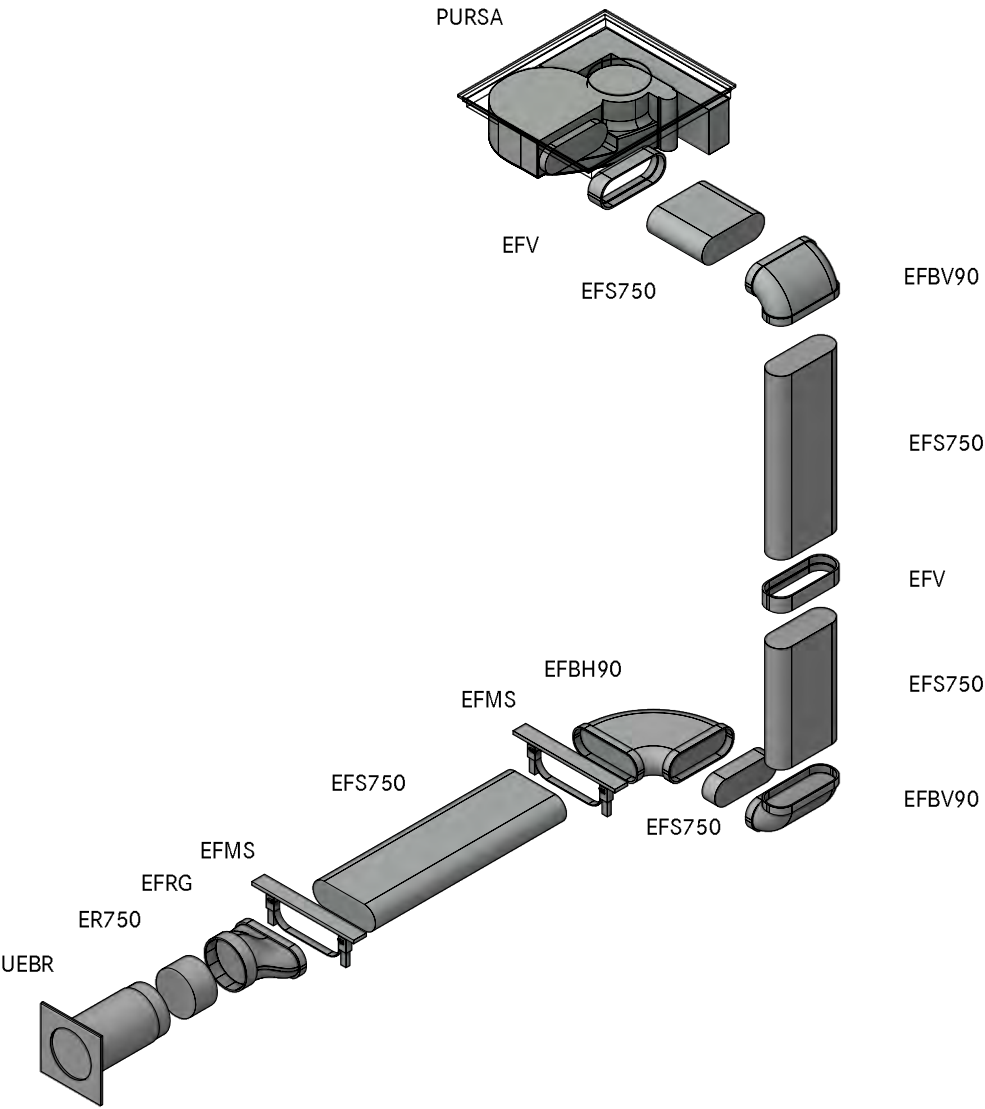

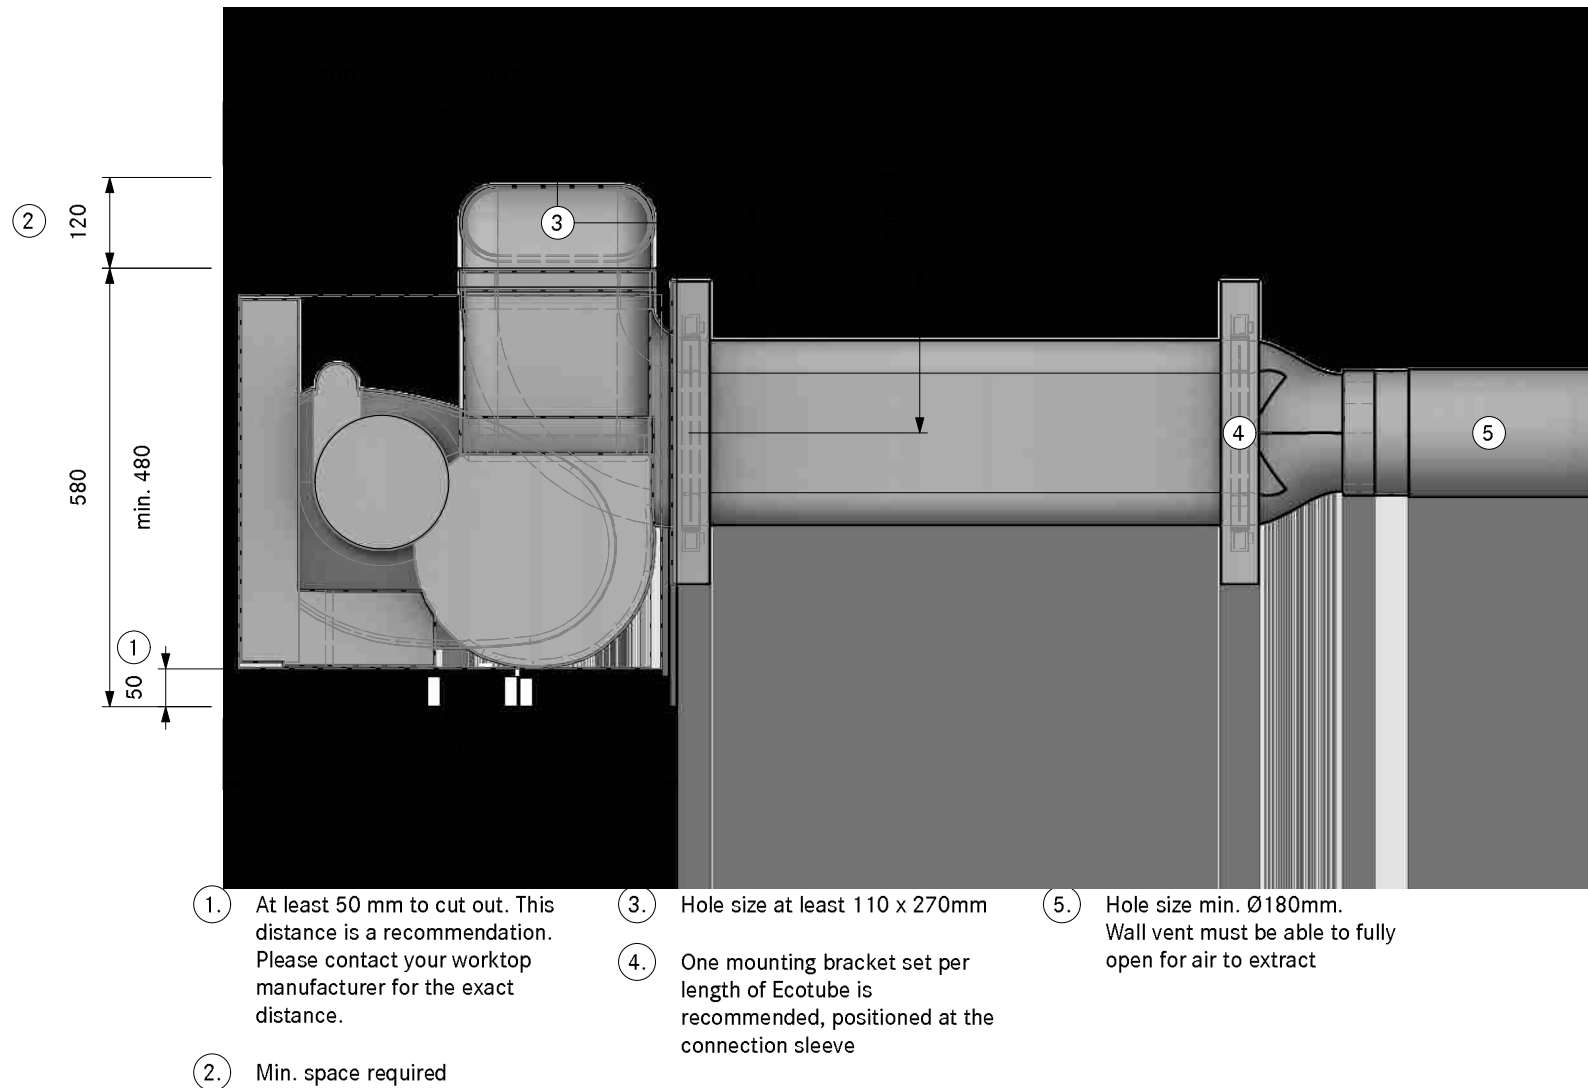


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA40220  
SPure Cellar right UEBR

LAYOUT

SA

Version, 1.0

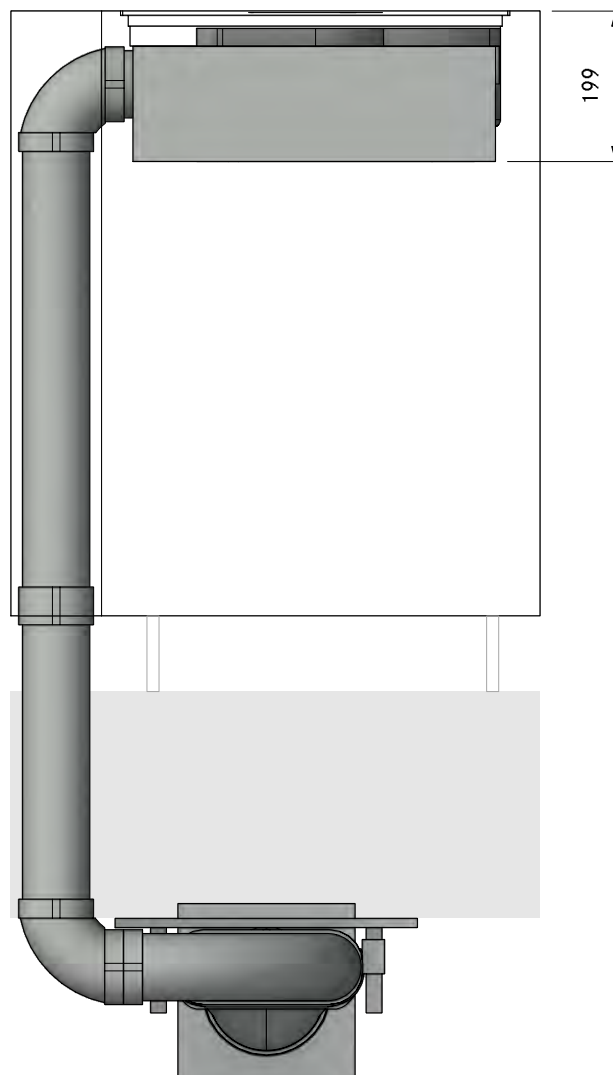



MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


SPA40220  
SPure Cellar right UEBR


Version, 1.0




LAYOUT

FA

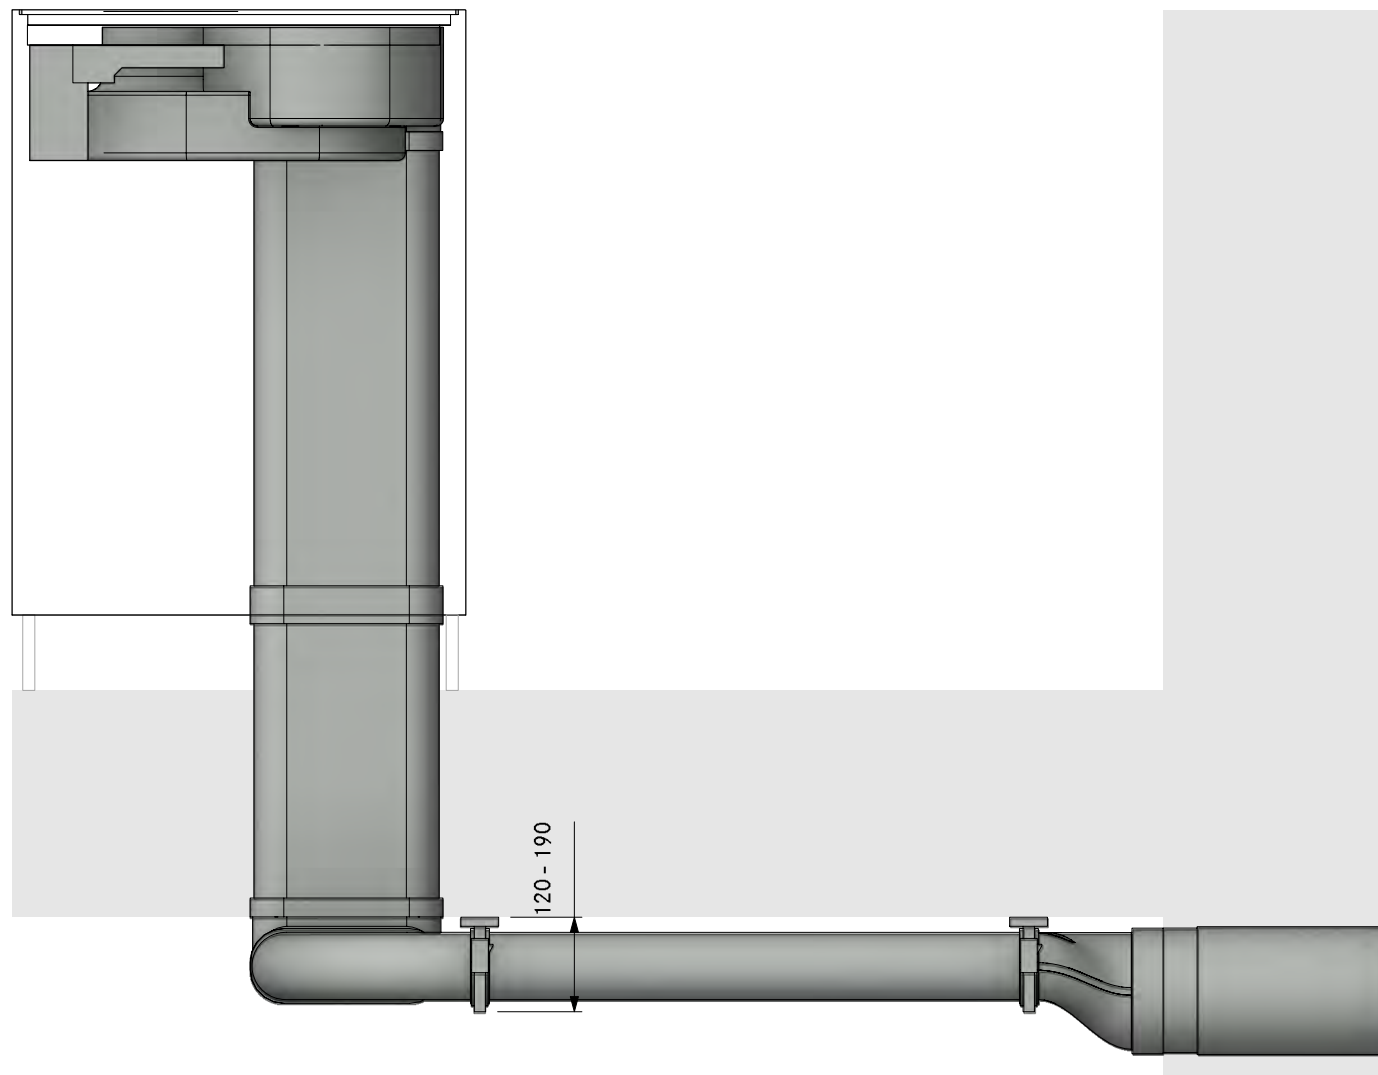

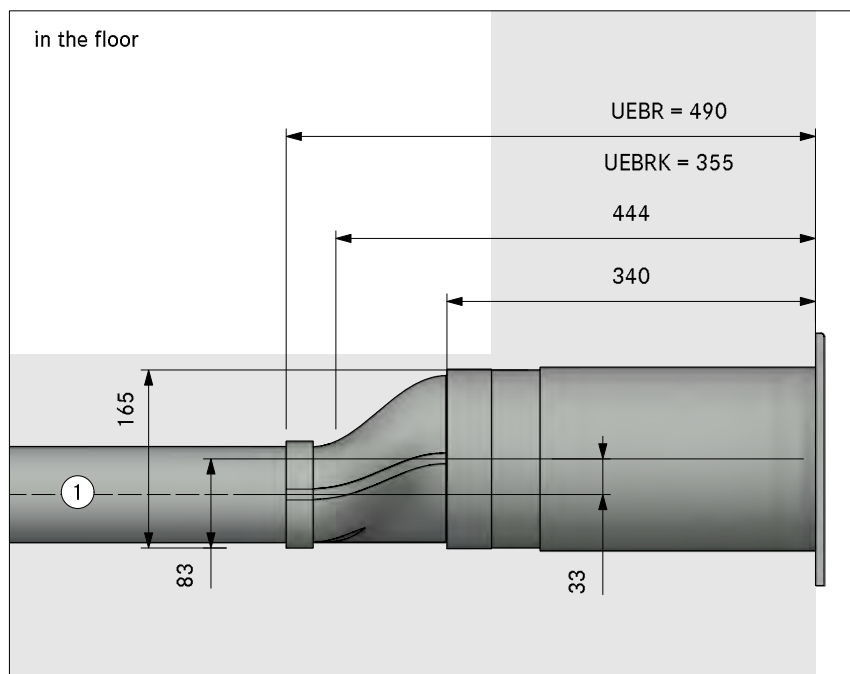


in the plinth area

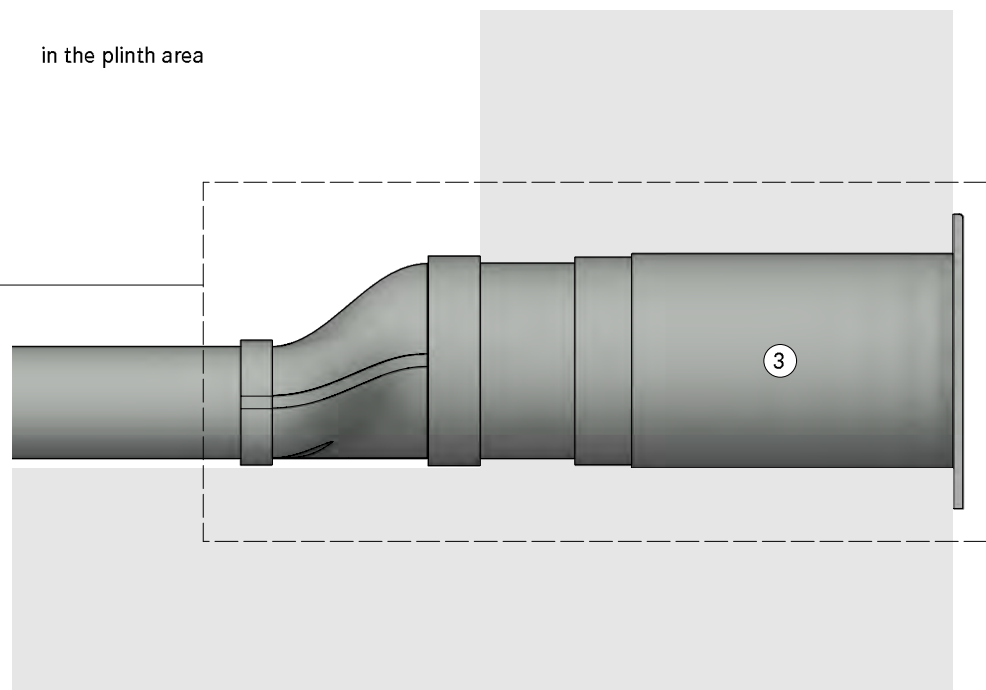

1. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
2. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

in the cellar

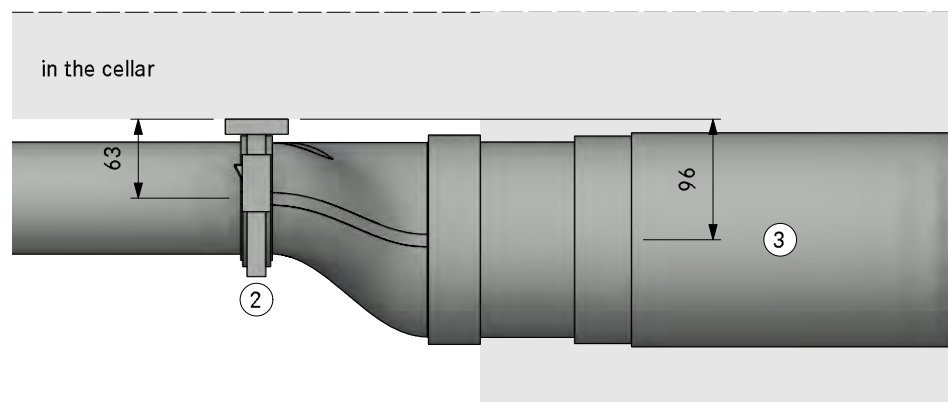





MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA40310  
SPure Cellar front UEBF

LAYOUT 3D HK

Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
<b>Item BORA Ecotube</b>		
2	EFBV90	90° bend flat vertical
2	EFMS	installation set flat
3	EFV	duct connection flat
1	UEBF	3box wall sleeve
3	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		

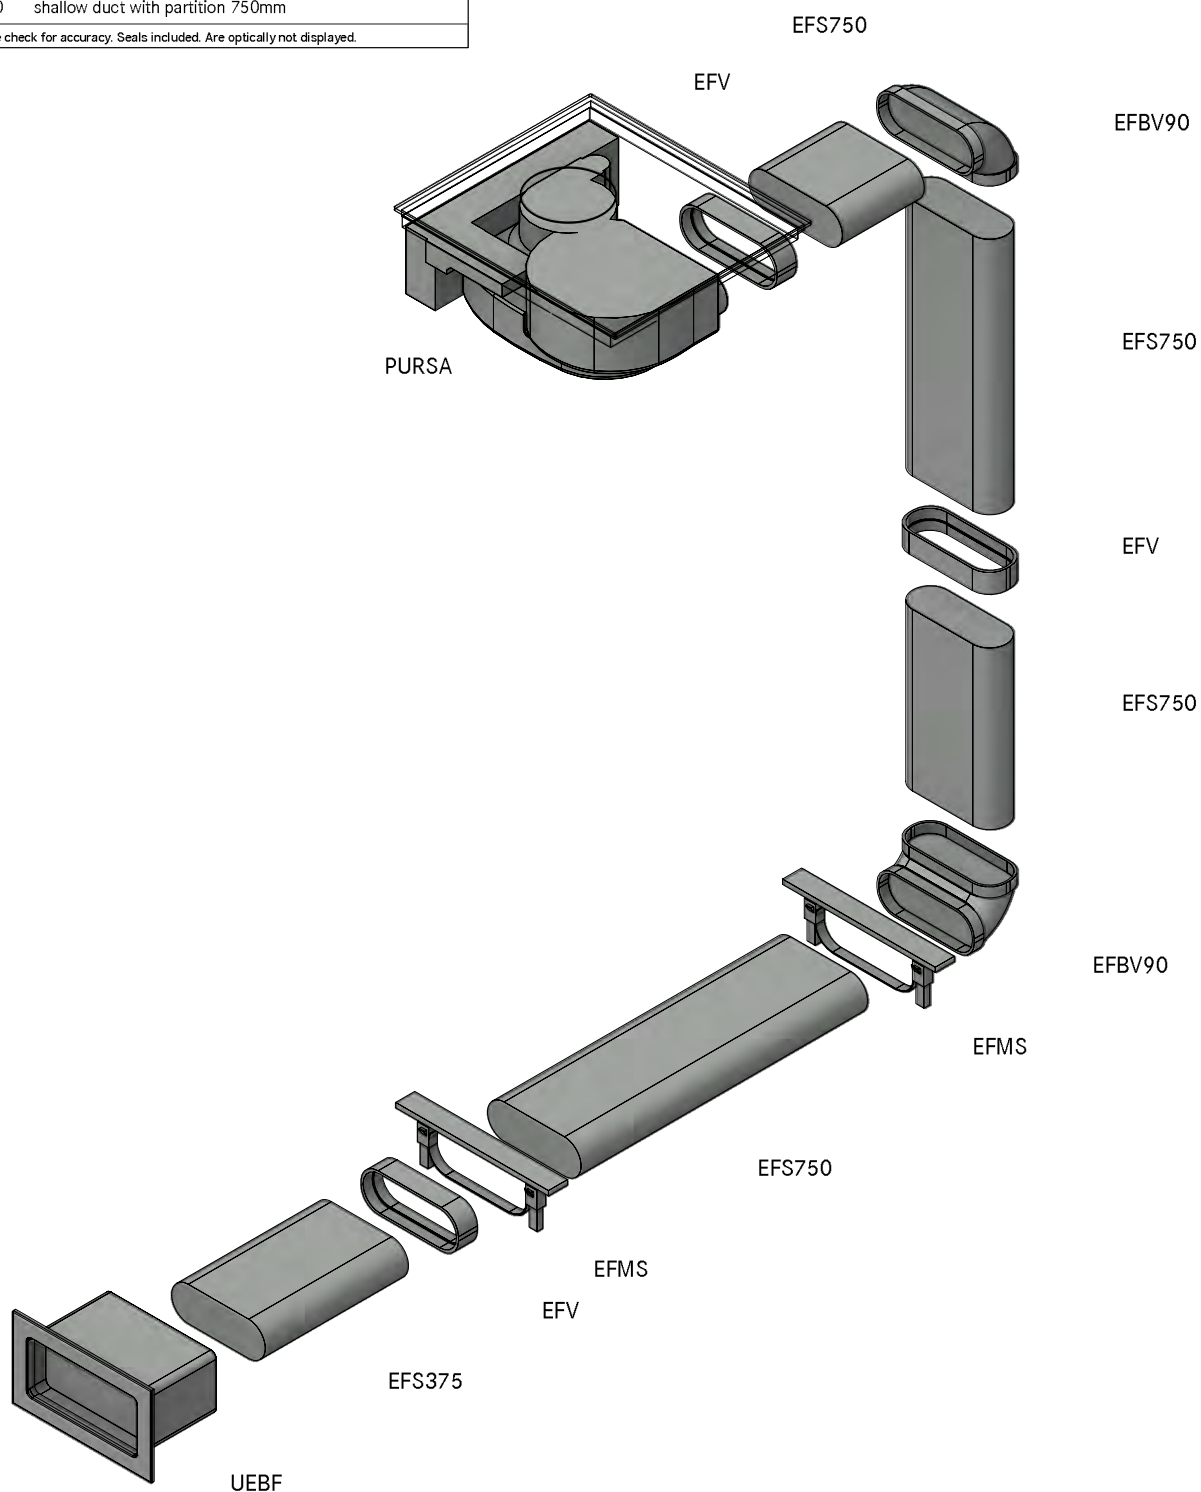

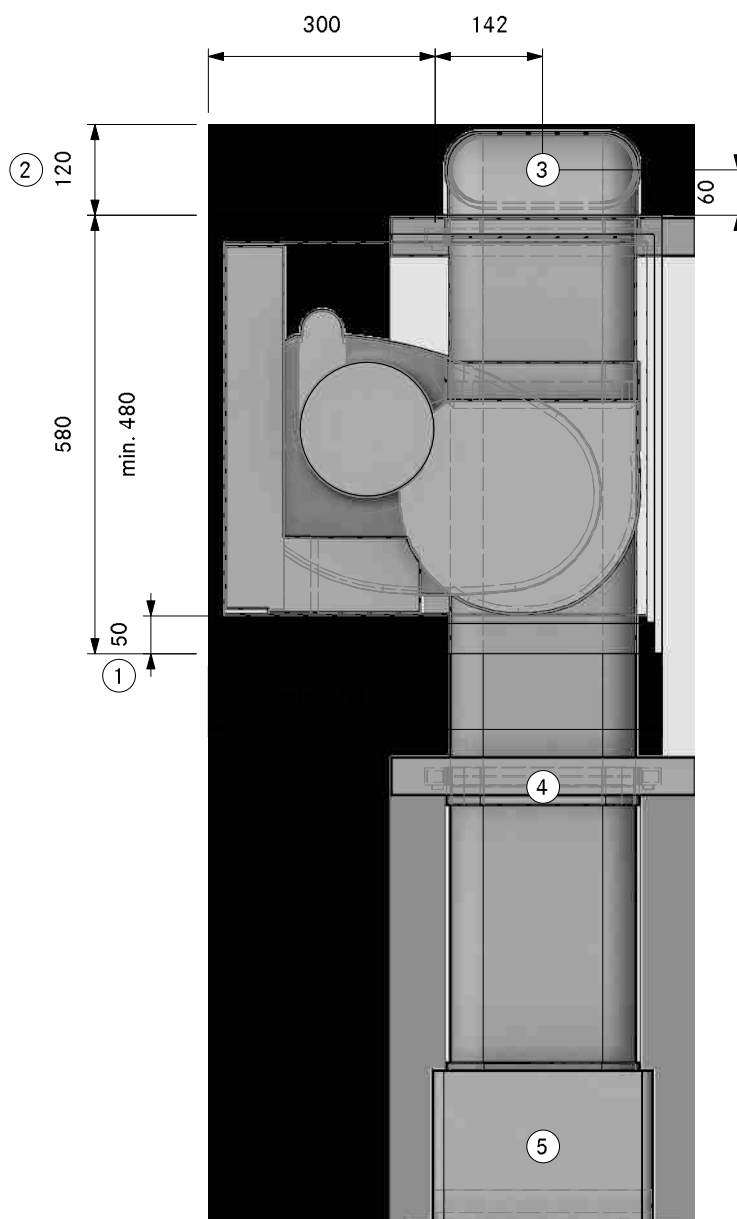

①. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.

②. Min. space required

③. Hole size at least 110 x 270mm

④. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve

⑤. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA40310**  
**SPure Cellar front UEBF**

LAYOUT

**SA**

Version, 1.0

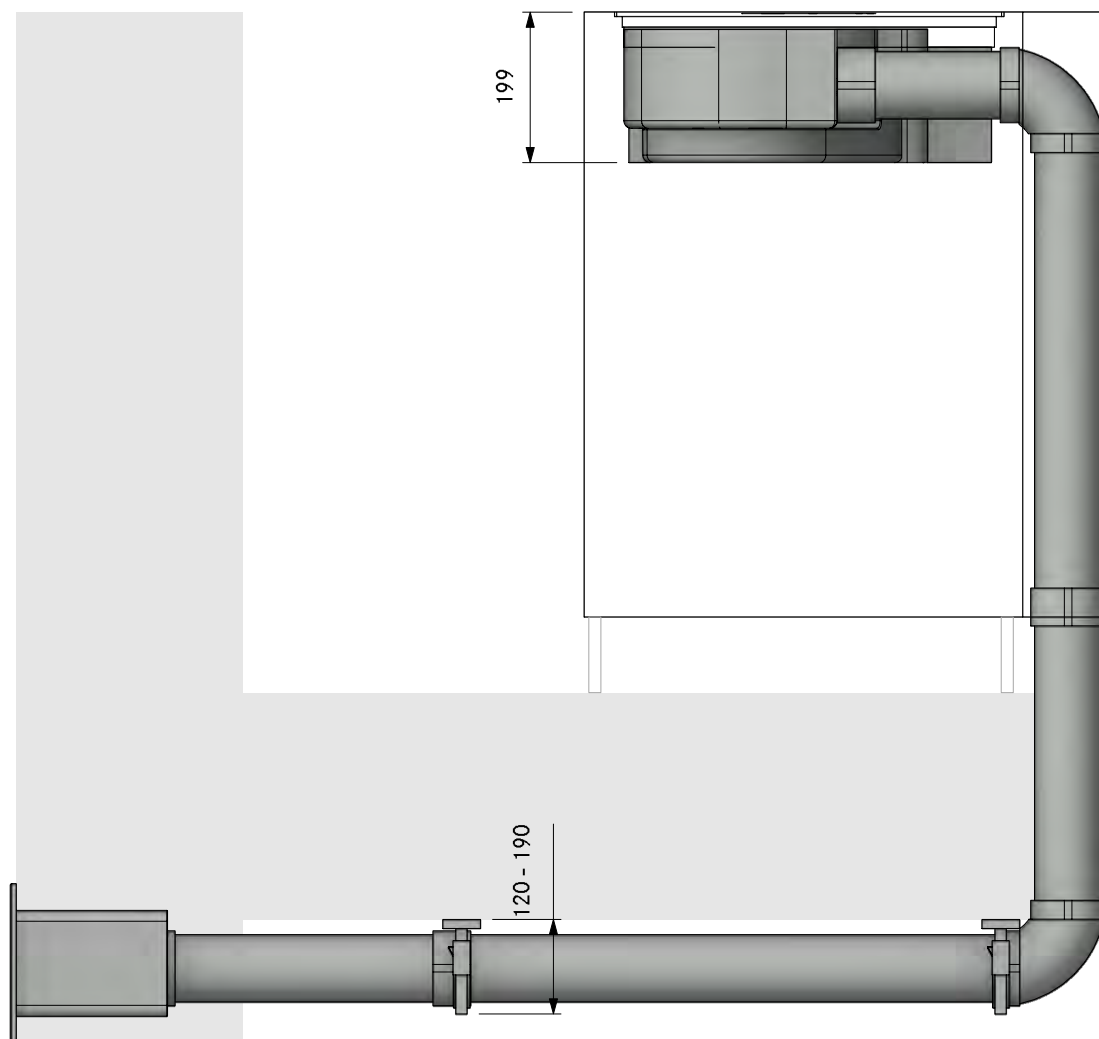


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA40310**  
**SPure Cellar front UEBF**

LAYOUT

FA

Version, 1.0

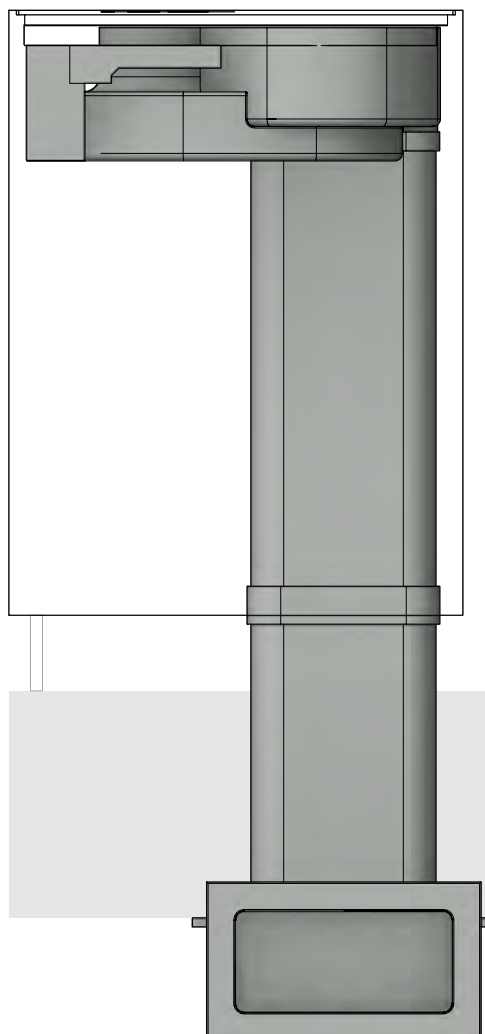


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA40310  
SPure Cellar front UEBF

LAYOUT

Detail

Version, 1.0

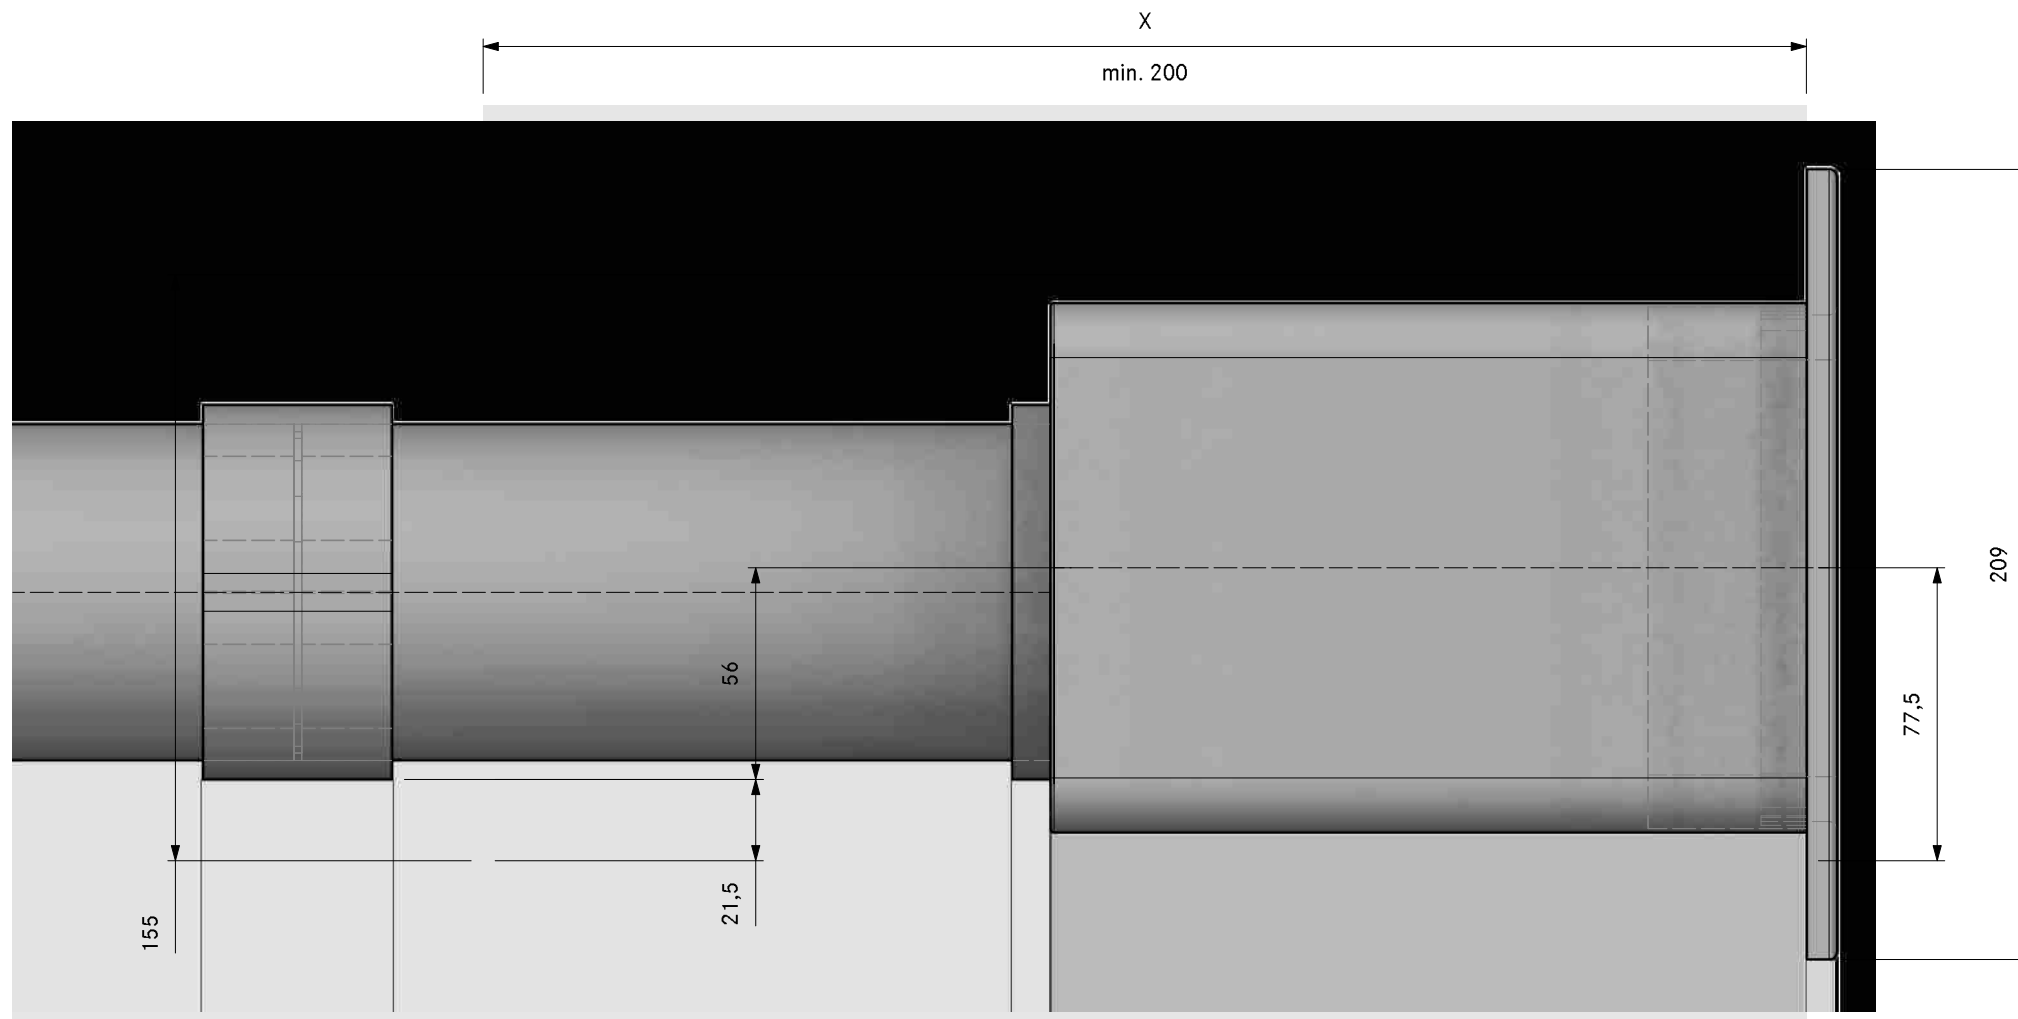






Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
2	EFBV90	90° bend flat vertical
2	EFMS	installation set flat
1	EFRG	bridge flat round straight
2	EFV	duct connection flat
1	UEBR	3box wall sleeve round
1	ER750	round duct 750mm
3	EFS750	shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

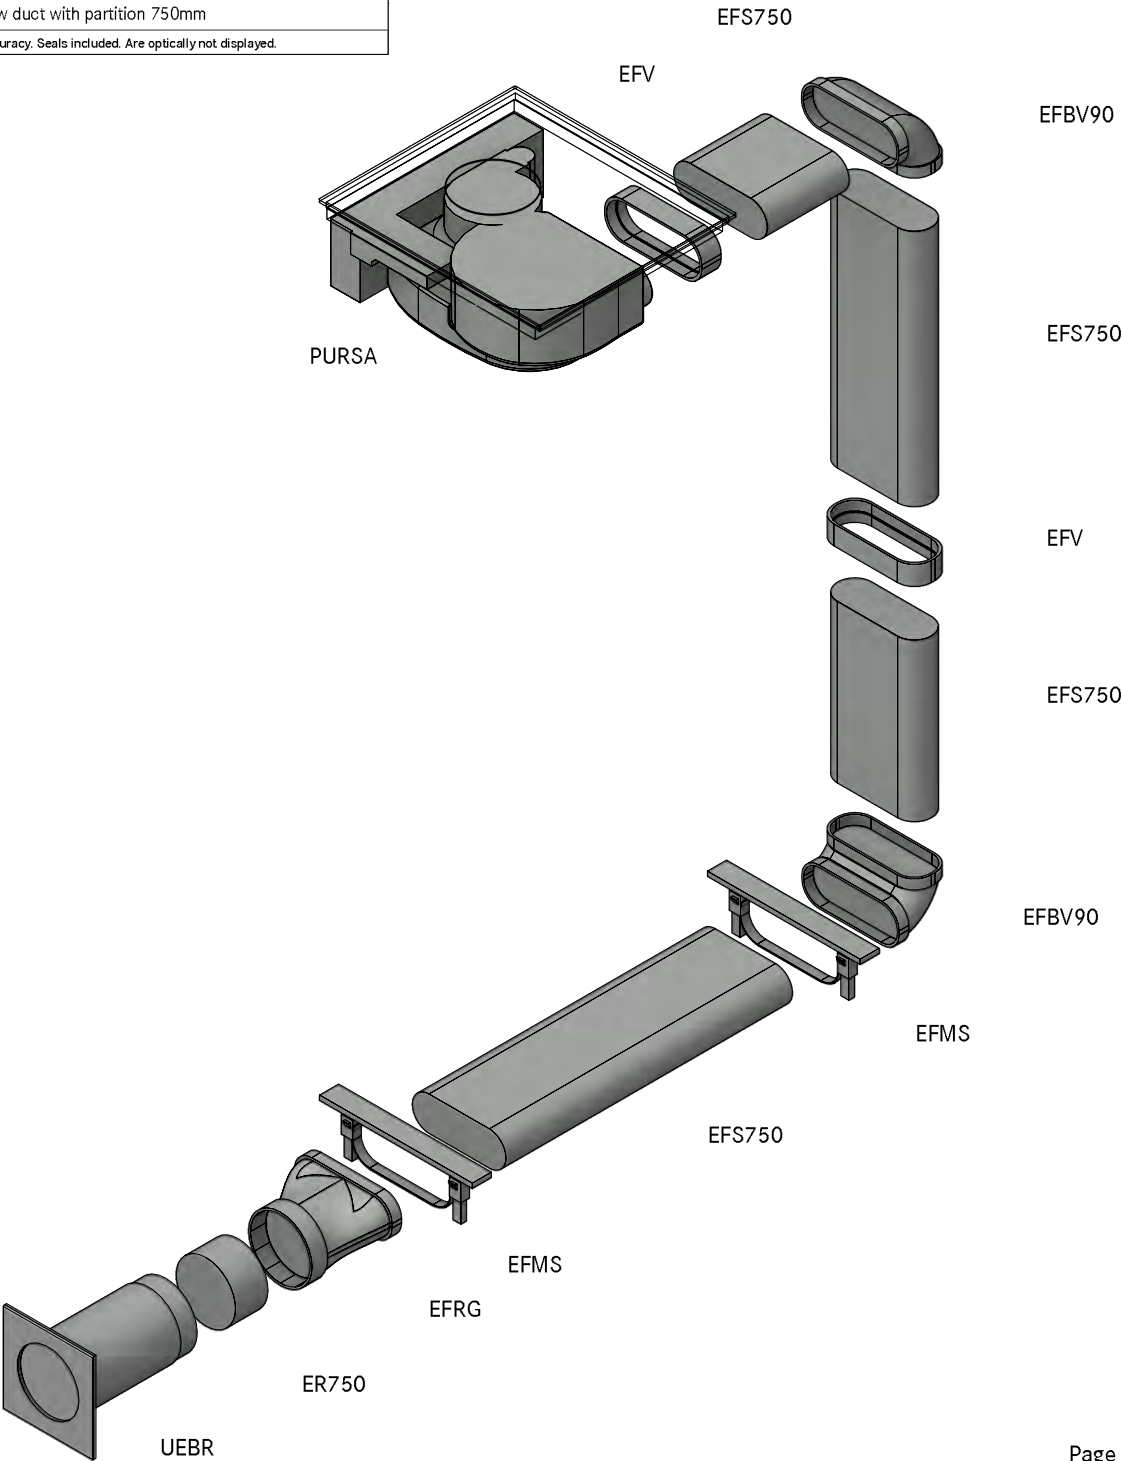


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA40320  
SPure Cellar front UEBR

LAYOUT

GR HK

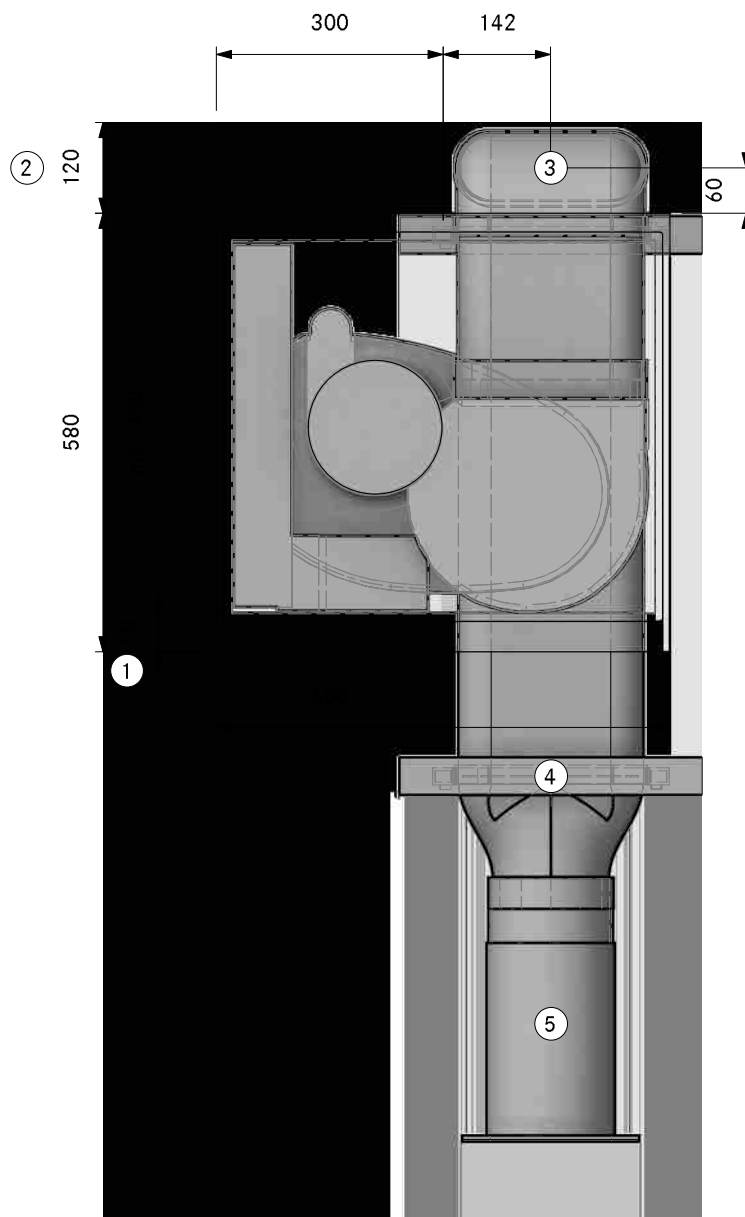

- ①. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- ②. Min. space required
- ③. Hole size at least 110 x 270mm
- ④. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
- ⑤. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA40320  
SPure Cellar front UEBR

LAYOUT

SA

Version, 1.0

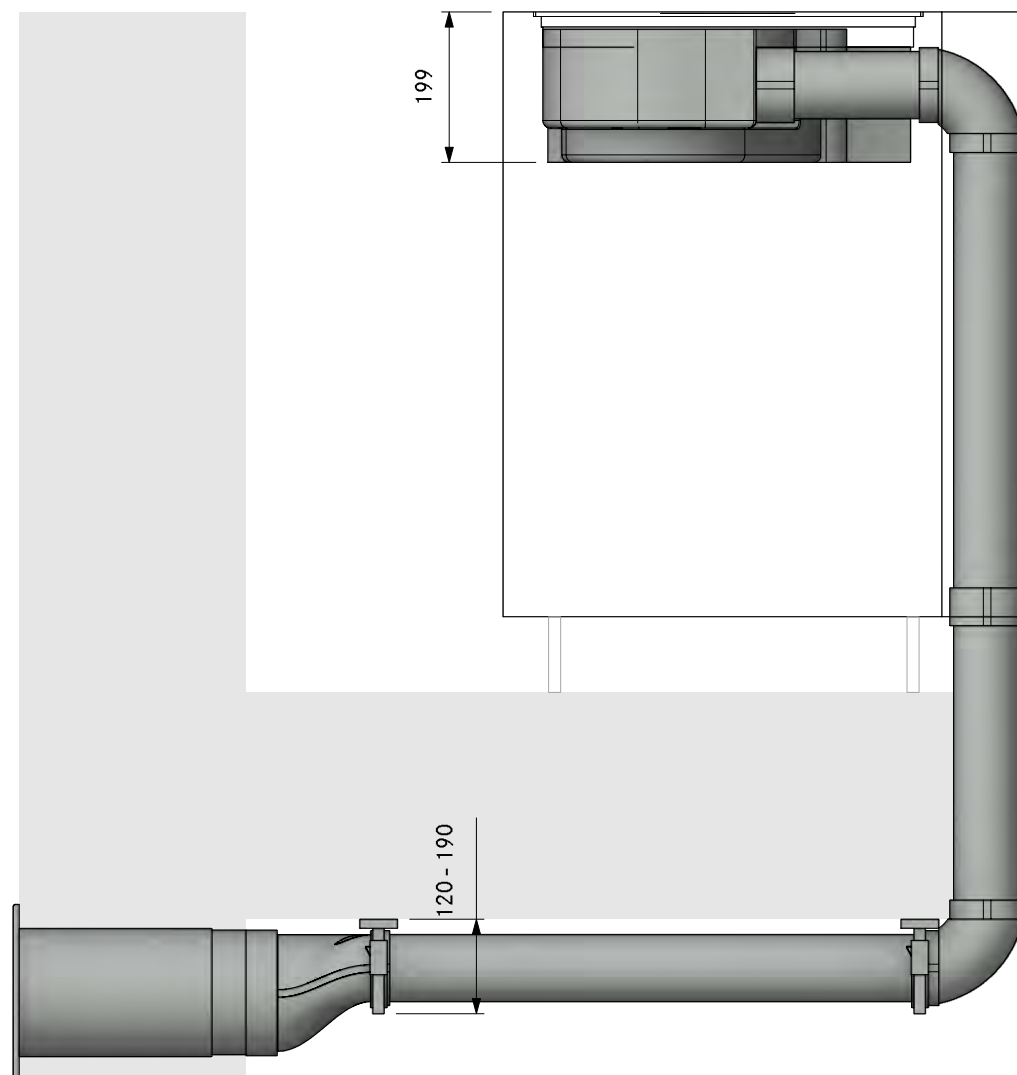


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA40320**  
**SPure Cellar front UEBR**

LAYOUT


**FA**

Version, 1.0

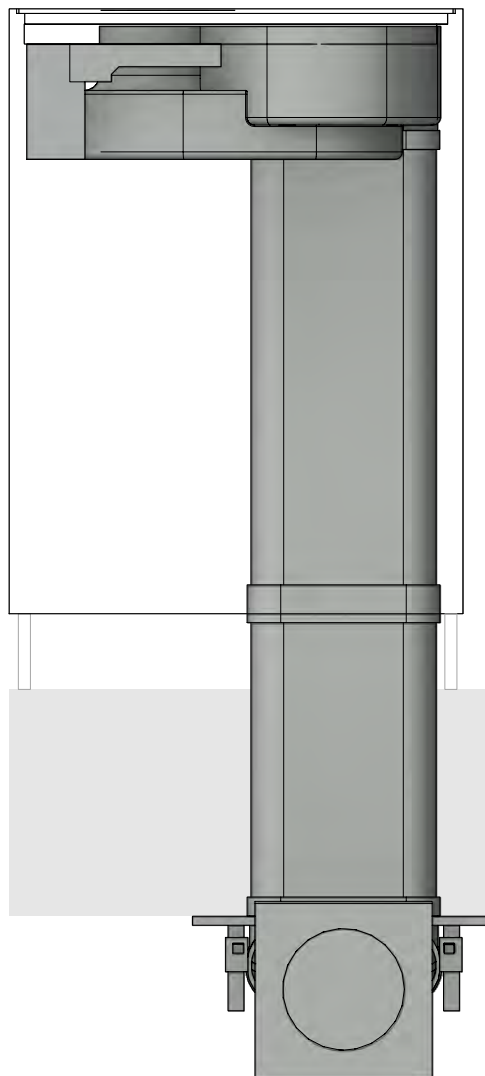


LAYOUT


Detail

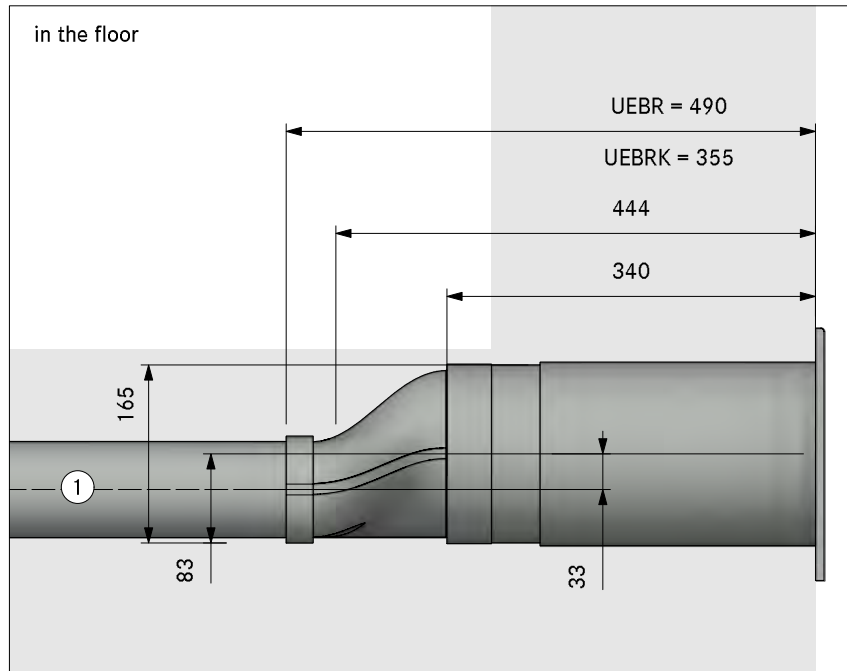

in the plinth area

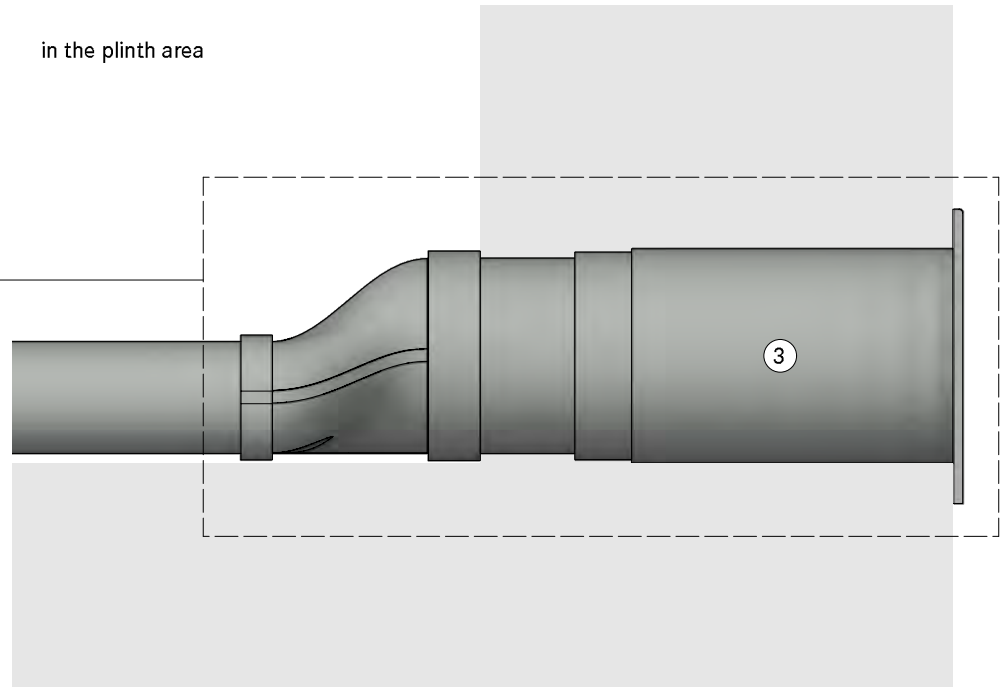


in the cellar

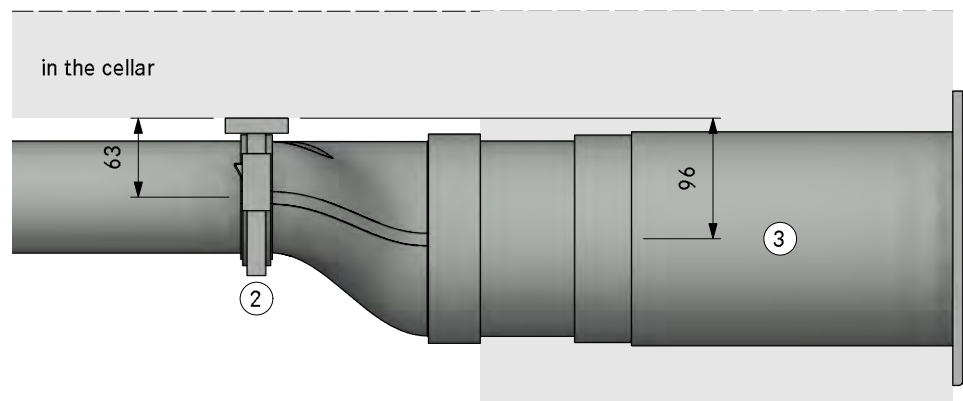


1. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
2. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract



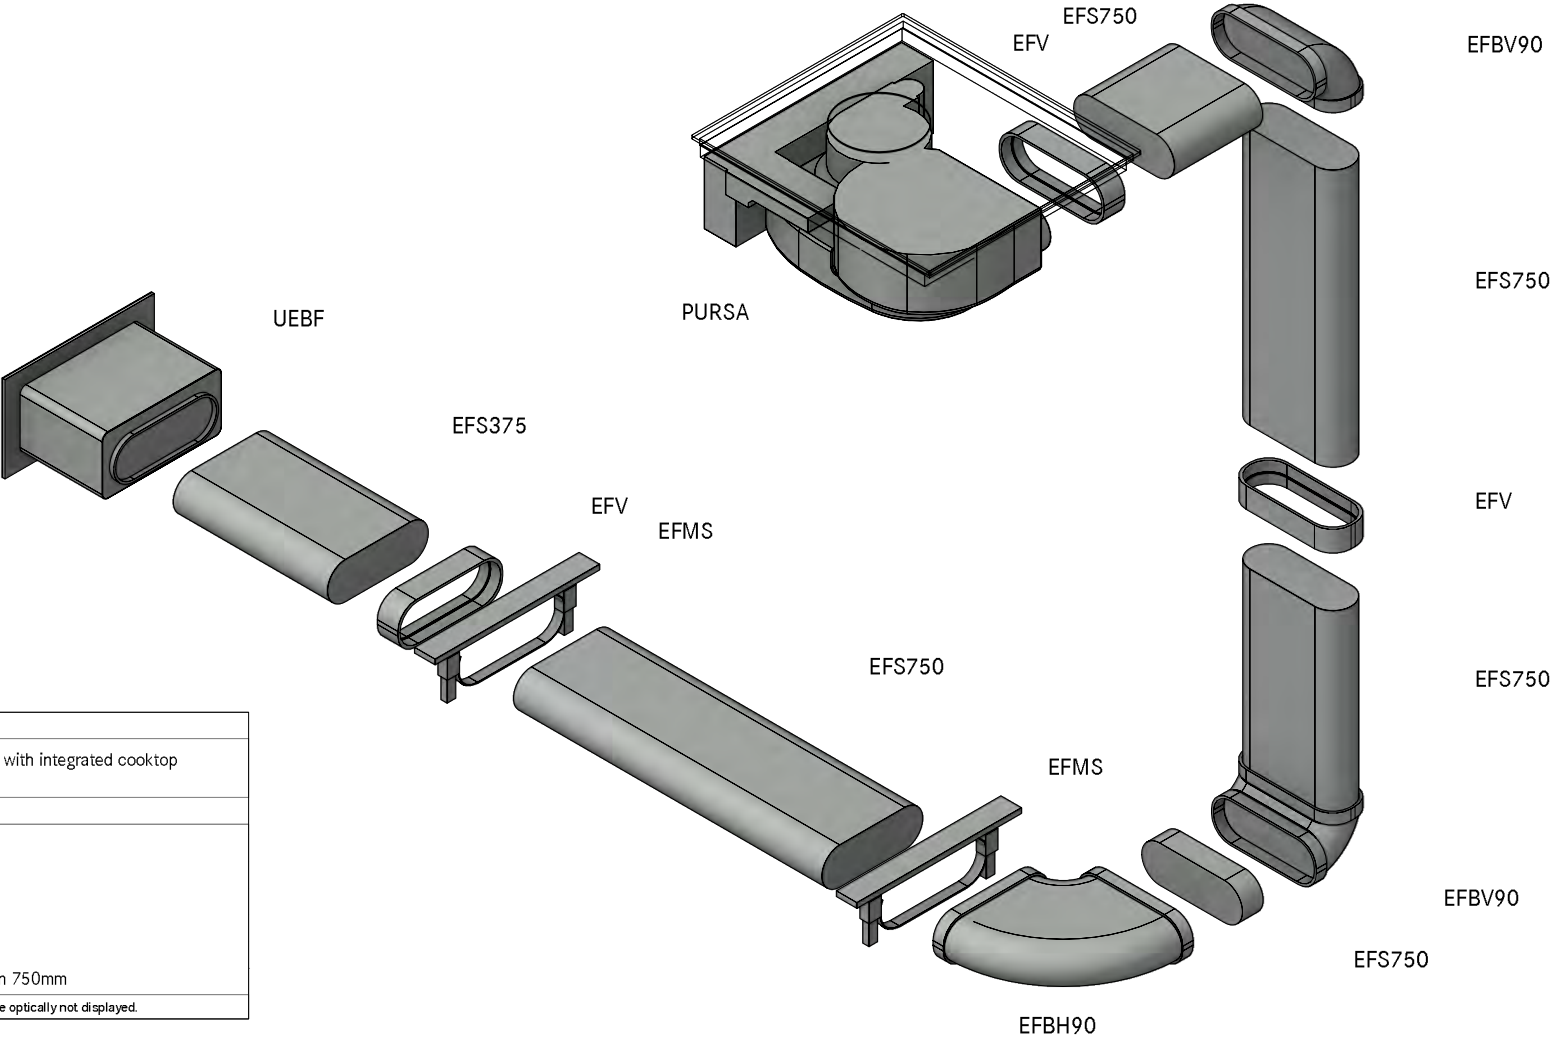

Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
1	EFBH90	90° bend flat horizontal
2	EFBV90	90° bend flat vertical
2	EFMS	installation set flat
3	EFV	duct connection flat
1	UEBF	3box wall sleeve
3	EFS750	shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.		



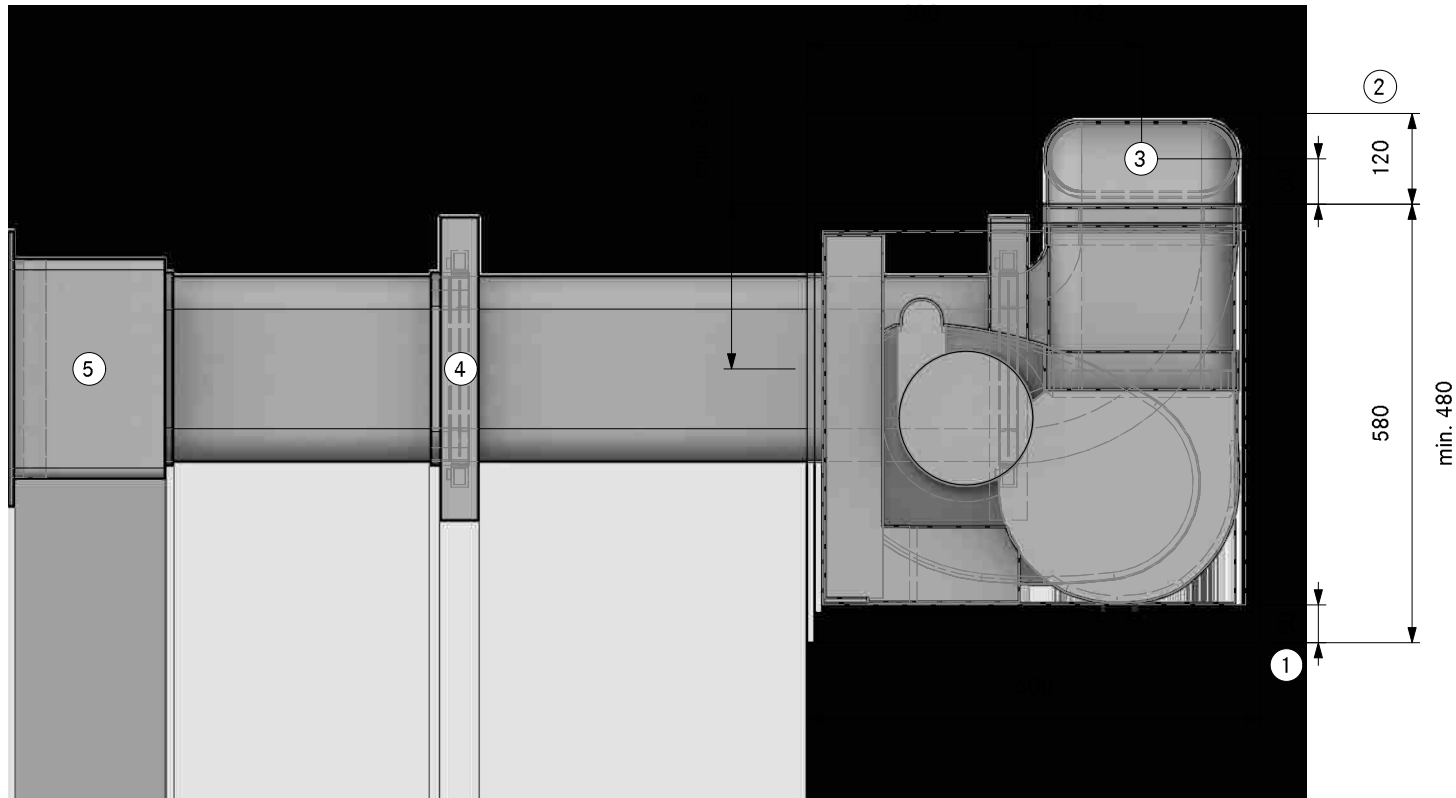

- ①. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- ②. Min. space required
- ③. Hole size at least 110 x 270mm
- ④. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
- ⑤. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA404 10**  
**SPure Cellar left UEBF**

LAYOUT

**SA**

Version, 1.0

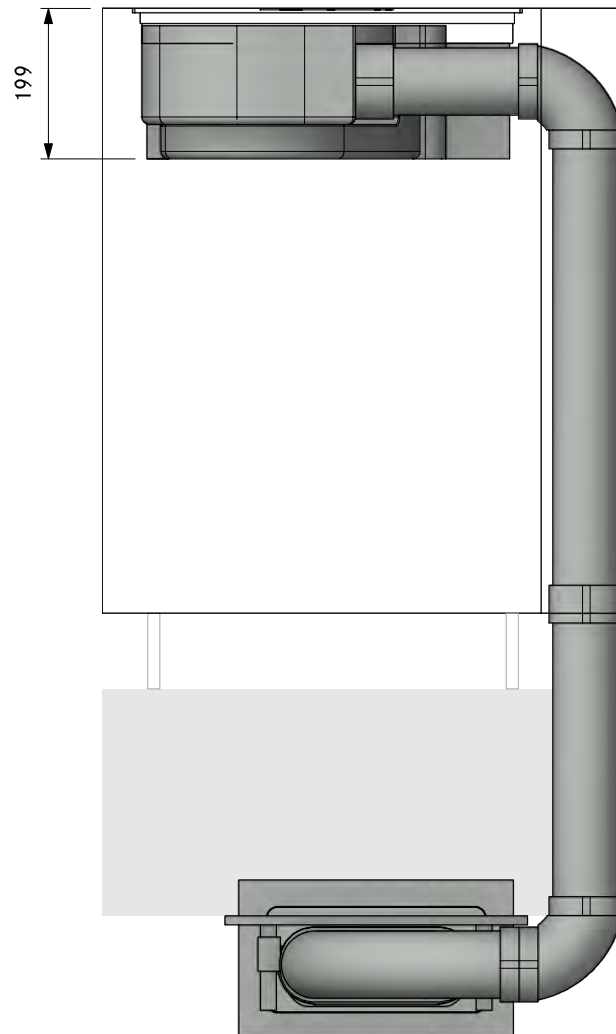


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA404 10**  
**SPure Cellar left UEBF**

LAYOUT

FA

Version, 1.0

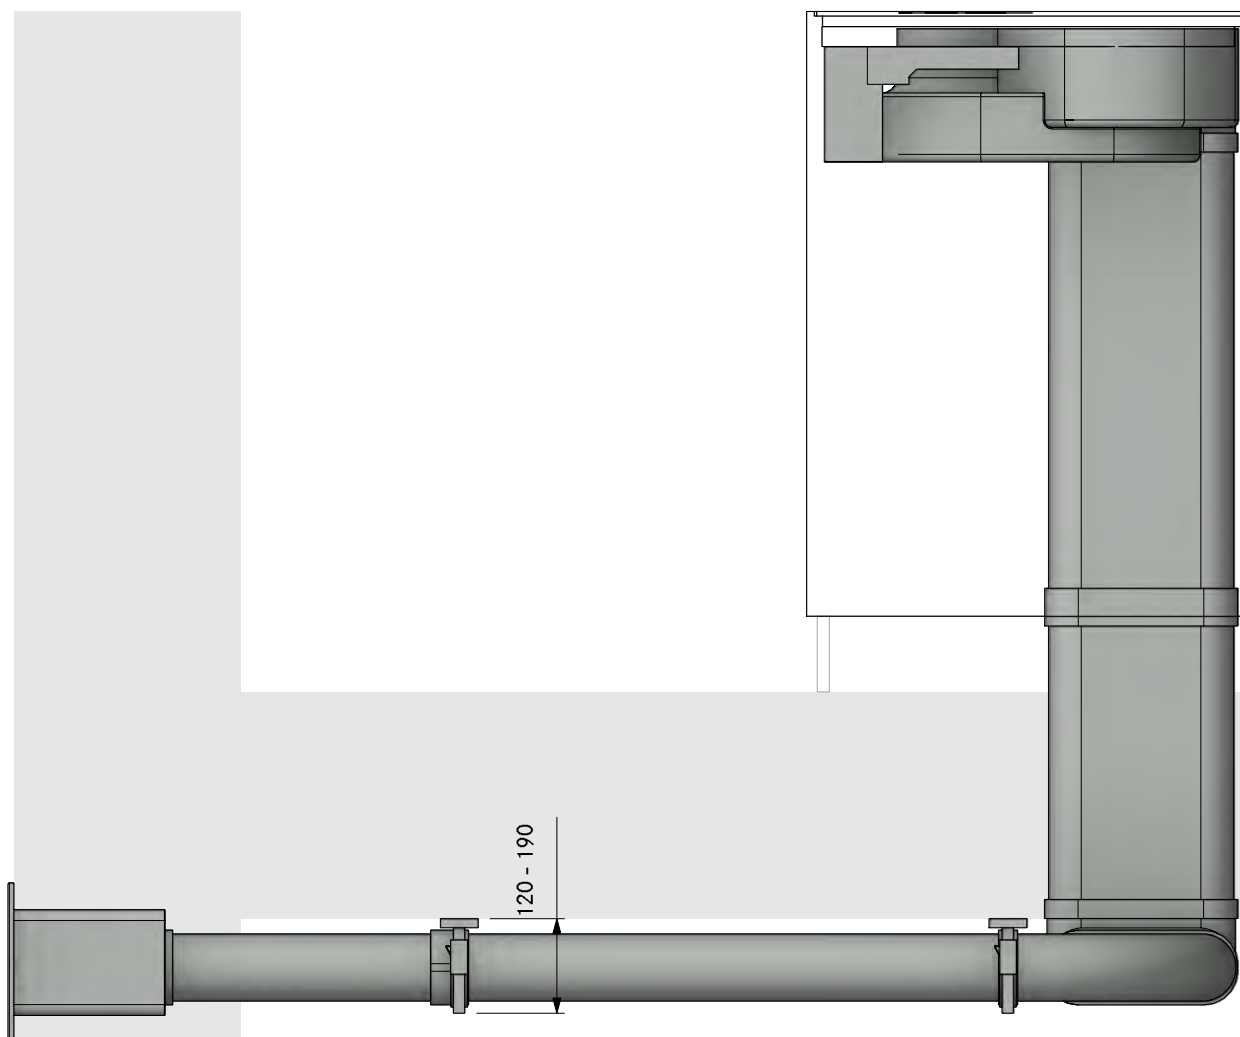


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

SPA404 10  
SPure Cellar left UEBF


LAYOUT

Detail

Version, 1.0

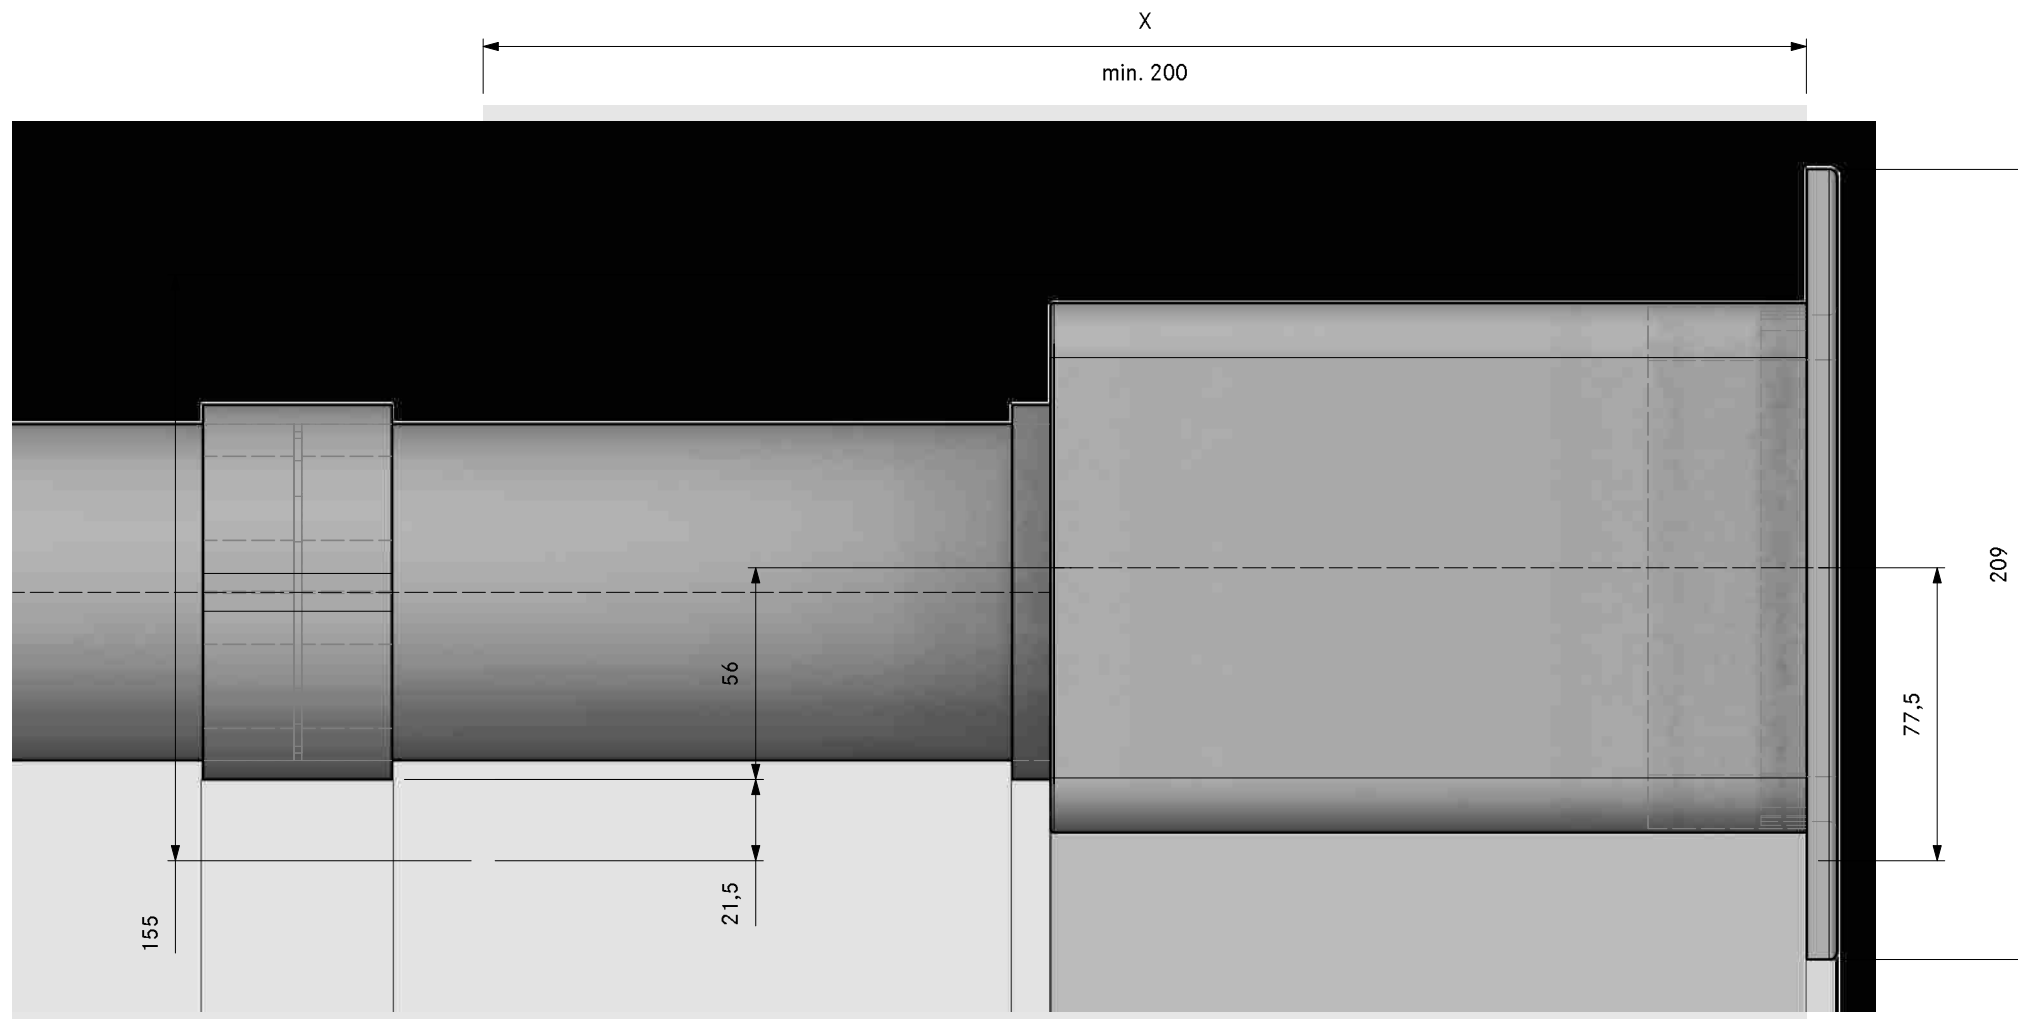




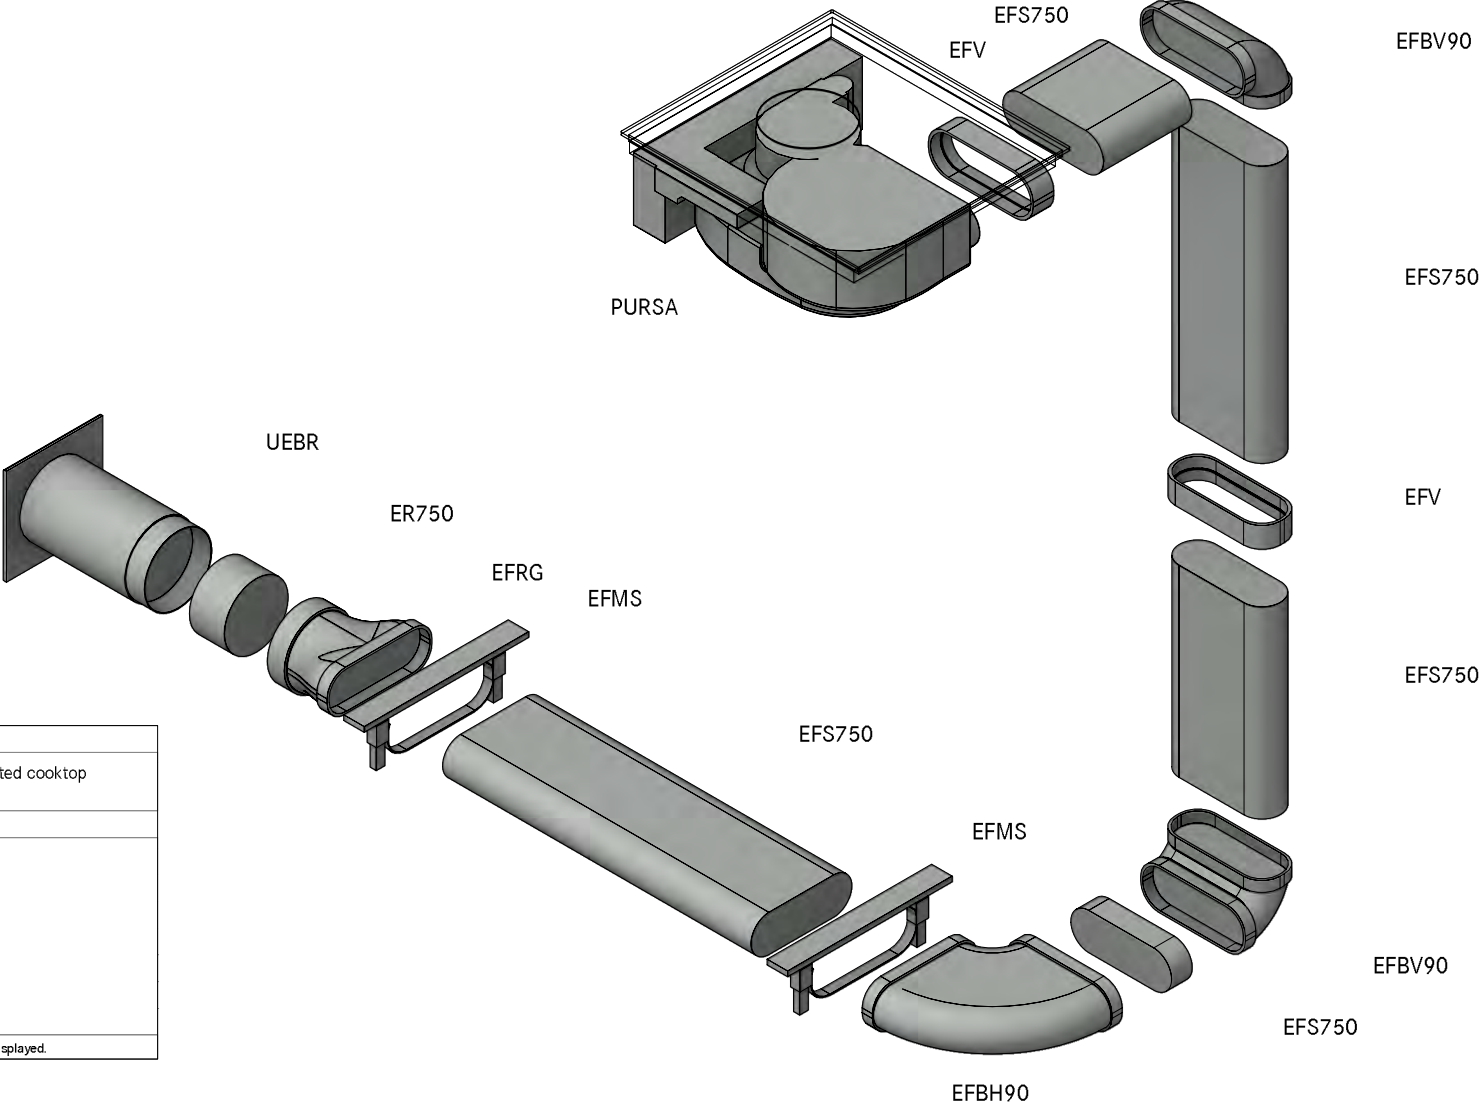

Count	Item BORA	
1	PURSA	S Pure induction cooktop with integrated cooktop extractor
Item BORA Ecotube		
1	EFBH90	90° bend flat horizontal
2	EFBV90	90° bend flat vertical
2	EFMS	installation set flat
1	EFRG	bridge flat round straight
1	UEBR	3box wall sleeve round
1	ER750	round duct 750mm
3	EFS750	shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

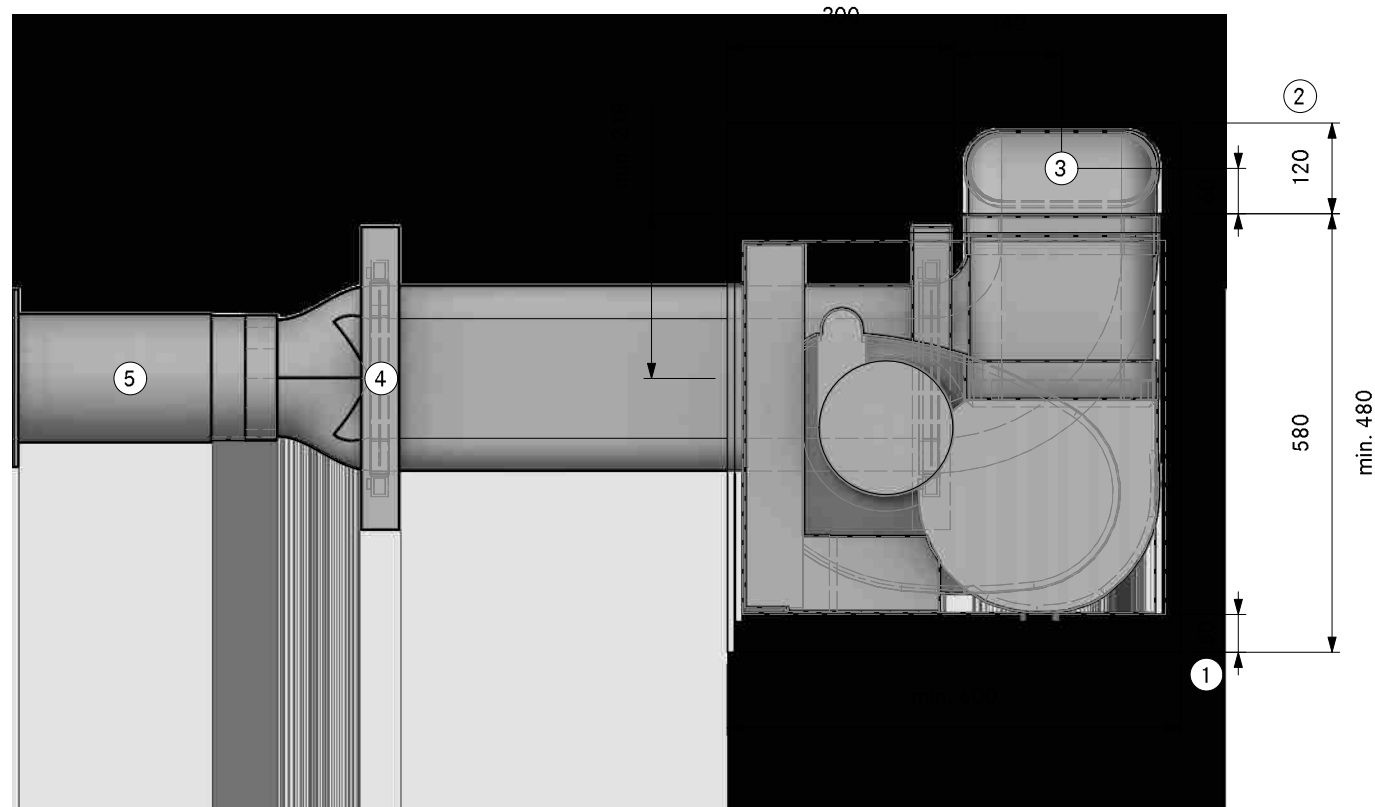

- ①. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- ②. Min. space required
- ③. Hole size at least 110 x 270mm
- ④. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
- ⑤. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

**SPA40420**  
**SPure Cellar left UEBR**

LAYOUT

**SA**

Version, 1.0

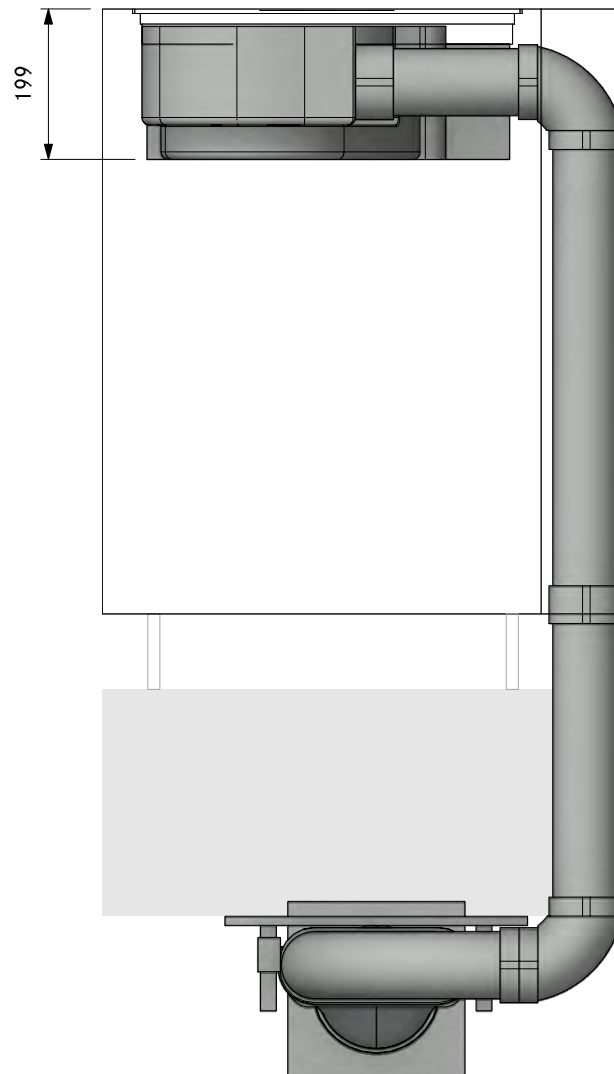




MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


SPA40420  
SPure Cellar left UEBR

LAYOUT


FA

Version, 1.0

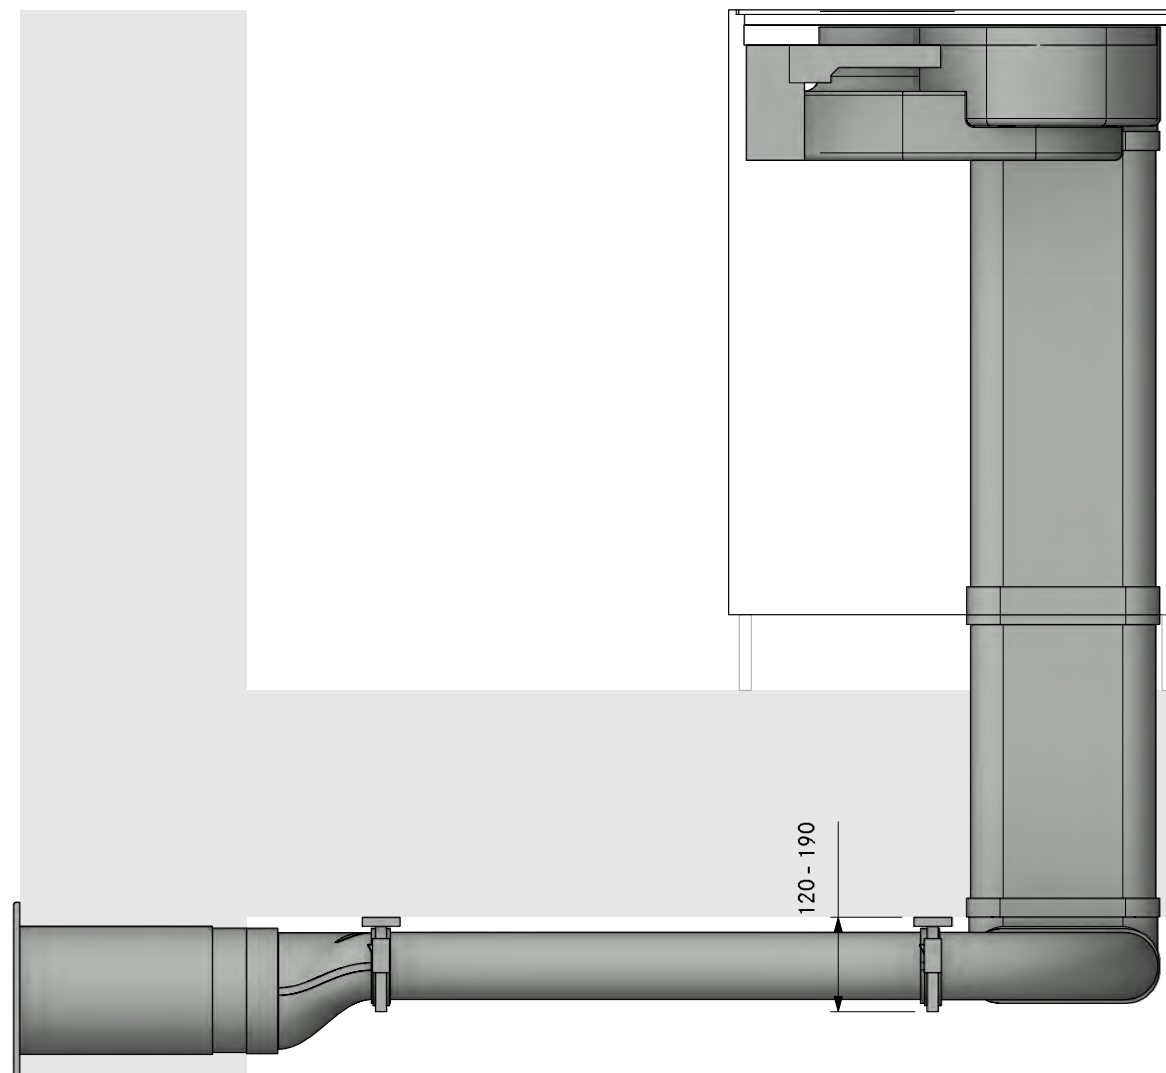

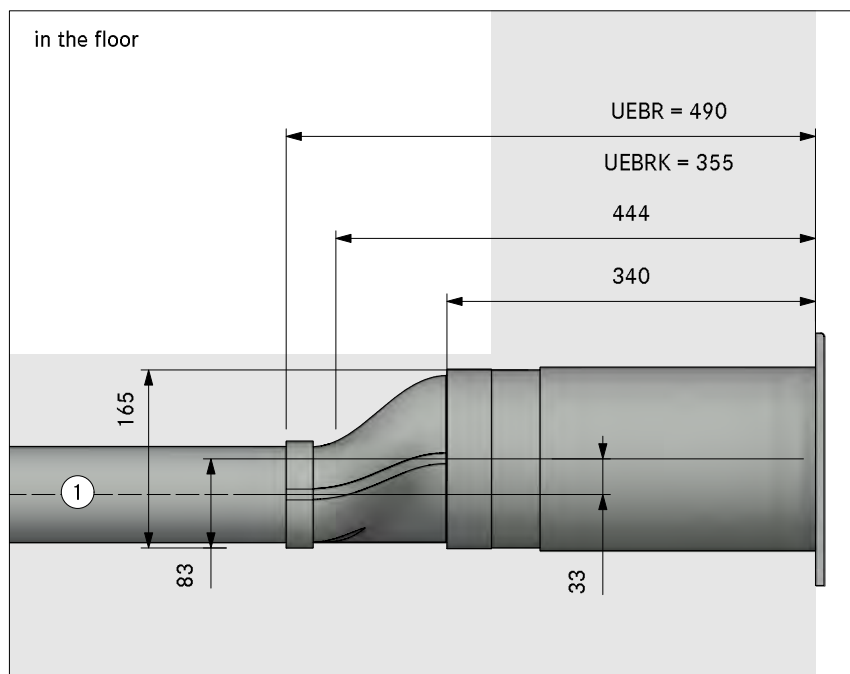

in the plinth area

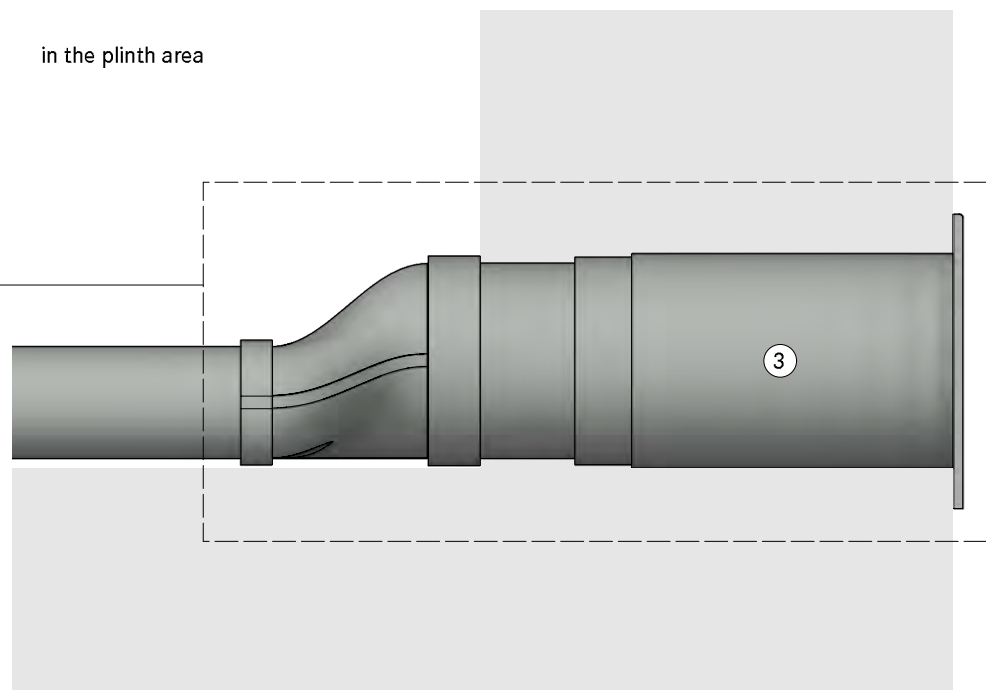

- ①. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
- ②. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
- ③. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

in the cellar

